

1. PRESSURE RELIEF VALVE 1/4", #PART 0504, VIAT
2. UPPER FILTER PRESS 1"
3. LIFT LUGS FOR LIFTING TRANSFORMER
4. L.V. BUSHING STUD 1" W/6 USABLE HOLES SPADE COOPER OR APPROVED EQUIVALENT
5. H.V. BUSHING WELLS & INSERTS 35-15kV, 200A, COOPER OR APPROVED EQUIVALENT
6. PARKING STANDS
7. DRIP SHIELD
8. TAP CHANGER 3 PHASES 34.5kV, 100 AMPS, ORTO 0495 9T OR APPROVED EQUIVALENT
9. BAY-O-NET FUSE HOLDER COOPER 4000361C99MC AND FUSE 4000358C05 + ISOLATION LINK
10. 2 HOLE NEMA GROUND PADS 1/2"-13 UNC TAPPED HOLES WITH HUBBEL GTCS34A (INCLUDES A GROUND STRAP ON H0X0).
11. PIPE CAP FOR DRAINING PURPOSES
12. CARBON-ALLOY STEEL TANK
13. L.V. - H.V. MILD STEEL BARRIER
14. HINGES FOR CABINET HOOD
15. DRAIN WIRES FOR H.V. BUSHING WELLS

SPECIAL NOTES:

- TAP CHANGER PROVIDES VOLTAGE REGULATION AS FOLLOWS:
2 POSITIONS ABOVE, 2 POSITIONS BELOW AT 2.5% OF RATED HIGH-VOLTAGE EACH.


REVISION A: RELEASED FOR APPROVAL

PRODUCTION DATA:
 225 KVA
 12470 GND Y / 7,200 - 208Y / 120 V ONAN
 CONNECTION: WYE - WYE
 WINDING MATERIAL: ALUMINUM - ALUMINUM
 ORDER NUMBER:
 PRODUCTION REQUEST:
 SERIAL NUMBER:
 CUSTOMER:
 PROJECT:
 INVENTORY ITEM:

NO LOAD LOSSES= 440 W
 LOAD LOSSES= 1,720 W
 DOE EFFICIENCY= 99.23 %

DIMENSIONS ARE APPROXIMATE AND SUBJECT TO CHANGE WITHOUT NOTICE AND SHOULD NOT BE USED FOR CONSTRUCTION PURPOSES.

WEIGHT APPROXIMATE : 3,600 Lb

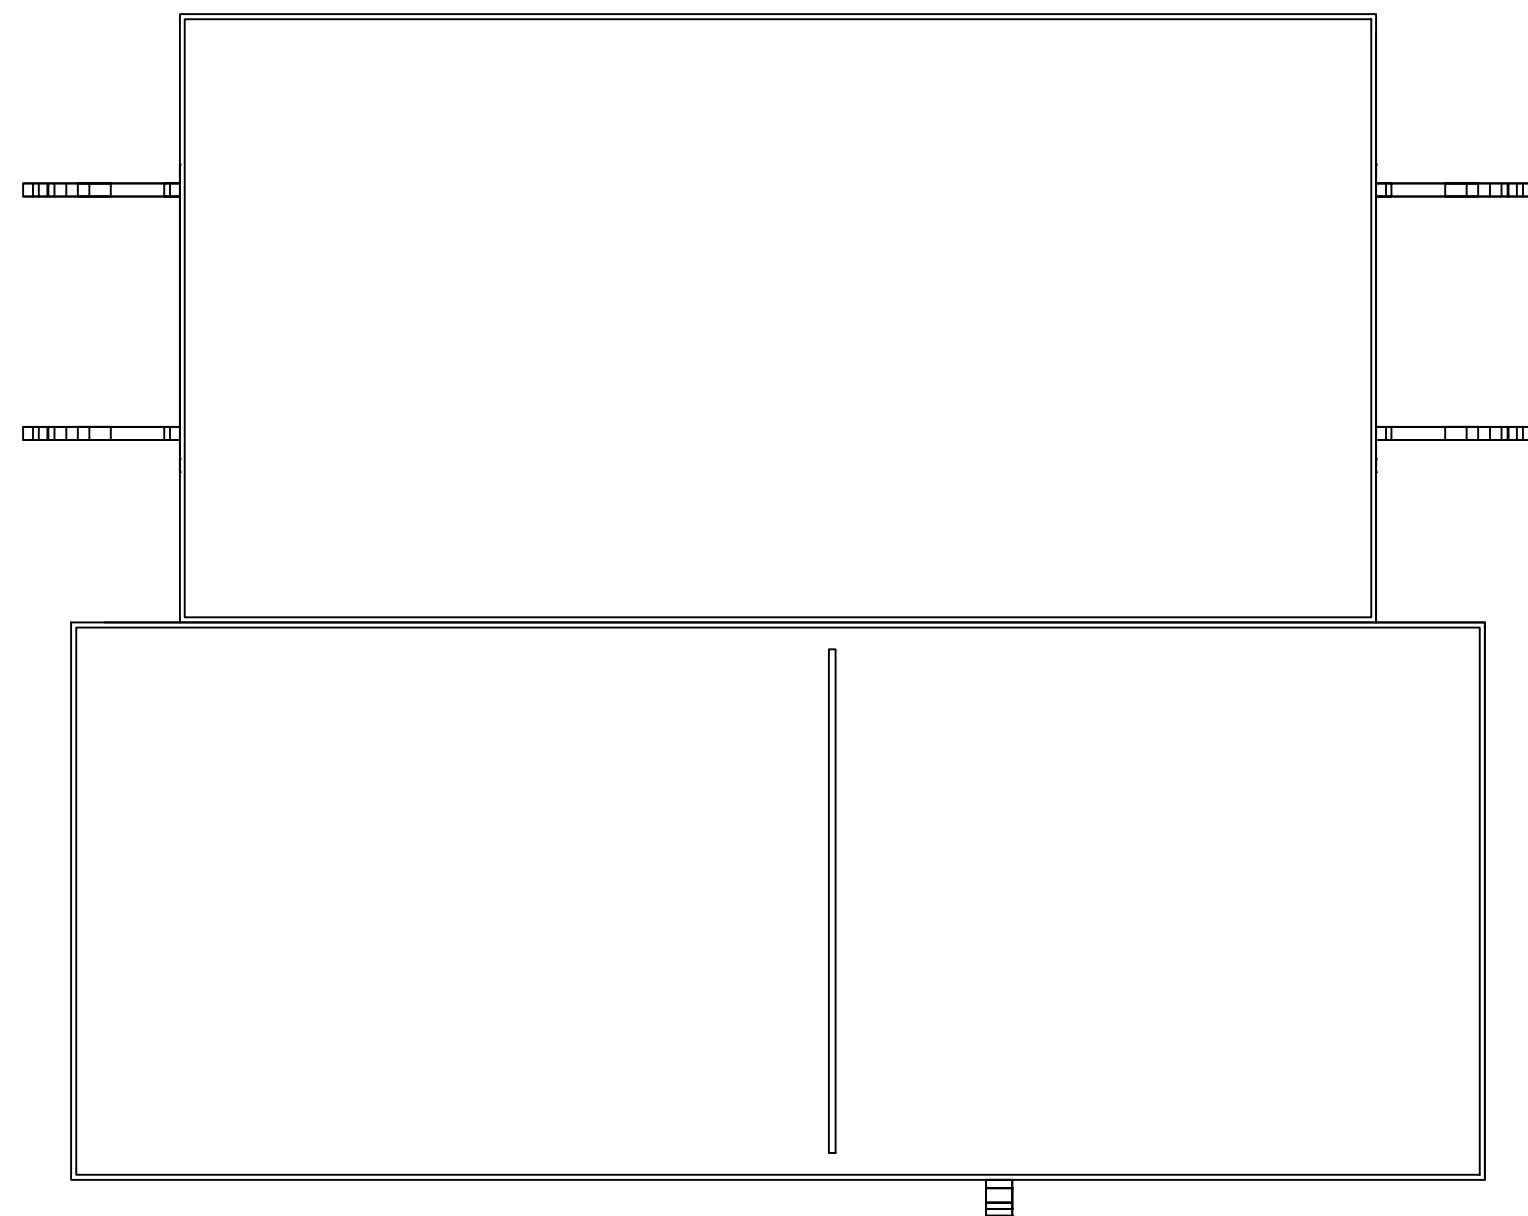

DELTA TRANSFORMADORES S.A. DE C.V.			
TITLE:			
OUTLINE PAD-MOUNTED TRANSFORMER 225 KVA			
RATING: 225 KVA	HIGH VOLTAGE: 12,470 GND Y / 7200 V	LOW VOLTAGE: 208 Y / 120 V	FREQUENCY: 60 Hz.
FEED OPERATION: LOOP FEED	CONNECTION: WYE - WYE	INSULATING FLUID: MINERAL OIL	
BRAND: DELTA ELECTRIC		WINDINGS: ALUMINUM - ALUMINUM	
DFTR: PC	DATE:		
REVISION: A	SCALE: N.T.S.		SHEET: 01 OF 01