


HT72-166M


NEW

Big Size: Cell 166*83

435W / 440W 445W / 450W / 455W

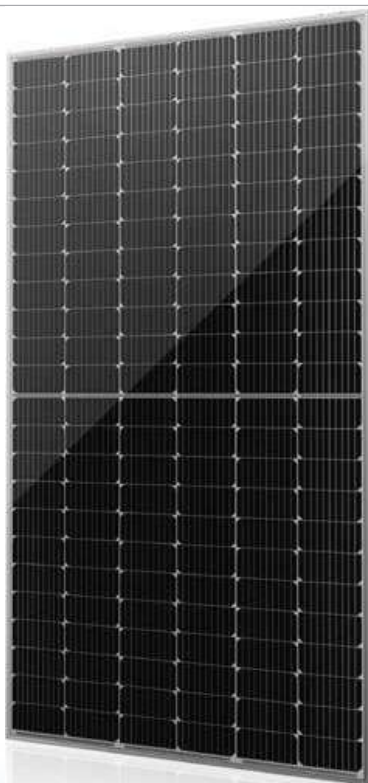

- Module Efficiency: 20.4%
- No. of Cells: 144 (6 × 24)
- Weight: 24.5kg
- Dimensions: 2115mm×1052mm×35mm

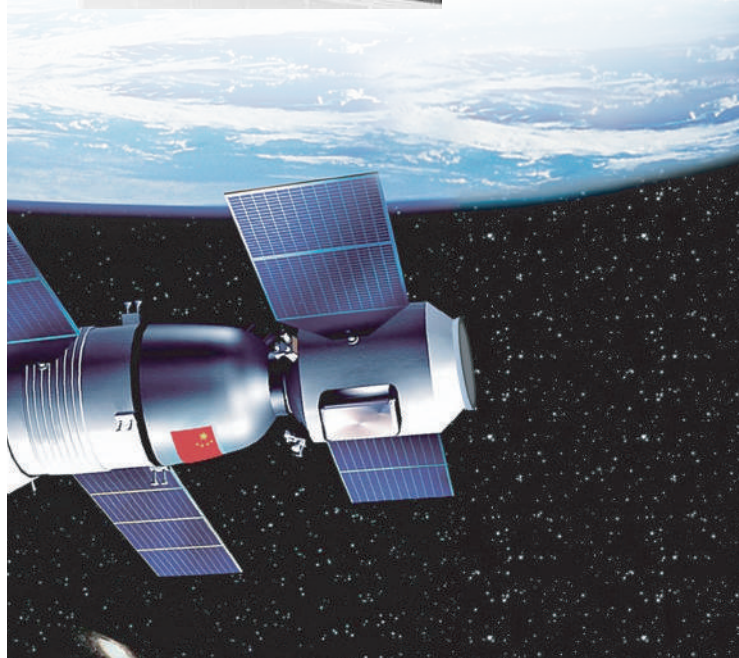

Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
website: www.ht-saae.com



Factory :
Lianyungang ShenZhou New Energy Co., Ltd.
Turkey HT Solar Energy Joint Stock Company



Half cut cell technology can reduce the internal power loss and improve component overall power.
Excellent heat dissipation avoids hot spot production.



9BB The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption

10Ys

Products Warranty

25Ys

Warranty on power output

EL

Microcrack resistant
Double glass structure
enhance reliability,
triple EL tested of high
quality control.



Designed for high voltage systems of up to **1500 VDC**, increasing the string length of solar systems and saving on BoS costs



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

5W

Positive tolerance
0/+5w guaranteed



Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

PID


PID Resistant

Comprehensive and first-rate certification system

IEC61215: 2016.IEC61730: 2016 Latest Standard
ISO9001, ISO14001 and OHSAS18001,
meeting the highest international standards
Strict quality control




IEC 61215
IEC 61730
Regular Production
Surveillance
www.tuv.com



Member Argo Group

MULTIWAY+

Engineering Drawing

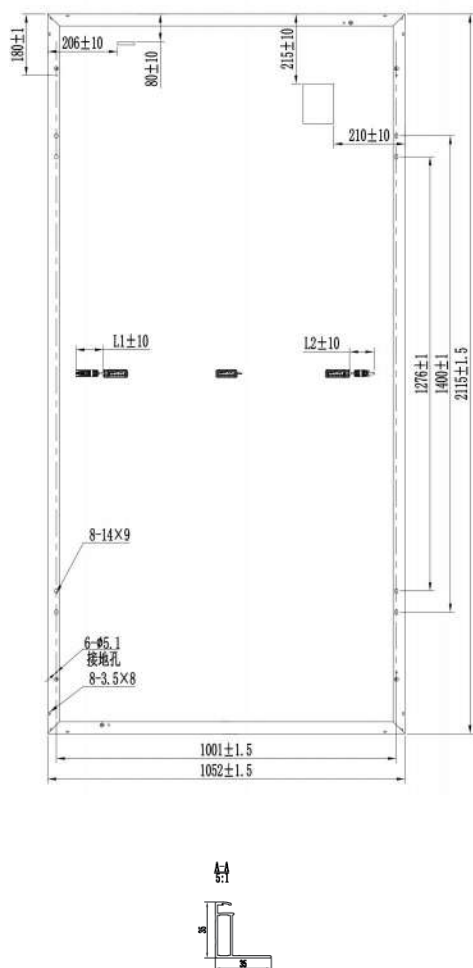

Electrical Characteristics

Module	HT72-166M				
Maximum Power at STC(Pmax)	435W	440W	445W	450W	455W
Open-Circuit Voltage(Voc)	49.6V	49.8V	49.9V	50.0V	50.1V
Short-Circuit Current(Isc)	11.53A	11.60A	11.72A	11.83A	11.96A
Optimum Operating Voltage (Vmp)	40.7V	40.9V	41.0V	41.1V	41.2V
Optimum Operating Current(Imp)	10.70A	10.77A	10.86A	10.96A	11.06A
Module Efficiency	19.6%	19.8%	20.0%	20.2%	20.4%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1000V / 1500V DC(IEC)				
Maximum Series Fuse Rating	15A				
Operating Temperature	-40 °C to +85 °C				

*STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NMOT

Module	HT72-166M				
Maximum Power	322W	326W	330W	333W	337W
Open Circuit Voltage (Voc)	46.9V	47.1V	47.2V	47.2V	47.3V
Short Circuit Current (Isc)	9.31A	9.37A	9.46A	9.55A	9.66A
Maximum Power Voltage (Vmp)	38.5V	38.6V	38.17V	38.8V	38.9V
Maximum Circuit Current (Imp)	8.36A	8.45A	8.53A	8.58A	8.66A
NOCT	45°C ±2°C				

*NMOT: Irradiance 800W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics


Solar Cells	Monocrystalline 166 × 83 mm
No. of Cells	144 (6 × 24)
Dimensions	2115mm×1052mm×35mm
Weight	24.5 kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm²(IEC) Length: (+)200mm,(-)300mm
Connectors	MC4 / MC4 Compatible
Packaging Configuration	30pcs / box, 660pcs / 40'HQ Container

Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.39%/K
Temperature Coefficient of Voc	β (Voc)	-0.29%/K
Temperature Coefficient of Isc	α (Isc)	0.049%/K


I-V Curves

Current-Voltage & Power-Voltage Curve

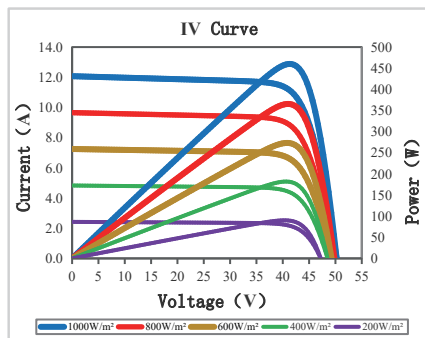

Warranty

10-year product warranty
25-year warranty on power output
Specific information is referred to the product quality guarantee



Information Box