



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

HYBRID™ 200-15 3000 psi • 15 l/pm



Three Phase



Hot Water



Daily Usage

FIELDS OF APPLICATION

- Factory Cleaning
- Train Depot Cleaning
- Wine Barrel Washing
- Quarantine Wash-bays
- Heavy Vehicle Cleaning
- Oil and Grease Removal
- Earthmoving Equipment
- Farming Equipment Cleaning



The Jetwave® Hybrid™ 200-15 will blast away grease and grime with ease. Australian engineered and assembled using only the best quality Italian and global components.



HERO INNOVATIONS



Robust

Soft coupling motor pump to ensure long and trouble free operational life.



Safety

24V electric low voltage control with timer stop.

STANDOUT FEATURES



Professional Italian triplex Interpump delivers performance and longer life.



Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.



Low speed professional pump for increased reliability and longer maintenance intervals.



Brass washable inlet water filter.



Integrated accessory storage for gun and lance.



90% fuel efficient environmentally friendly V1 vertical diesel fired hot water burner system.



Jetwave Safety System™ (JSS) to prevent over pressurisation.



Stainless steel by-pass cooling water tank.



Professional line accessories.



Quality pressure gauge.



Zero brass adjustable unloader valve for user flexibility.



Jetwave Group
 72-74 Richmond Road
 Keswick | Adelaide
 South Australia | 5035 | AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au

Ergonomics - Trolley frame designed for durability.


Robust - Galvanised steel to withstand tough environmental conditions.



Power - V1 vertical burner system.

Portability - Heavy duty double bearing wheels.

STANDARD EQUIPMENT

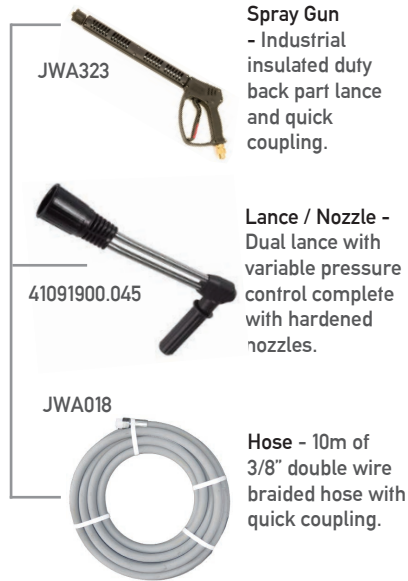

Spray Gun
 - Industrial insulated duty back part lance and quick coupling.

Lance / Nozzle - Dual lance with variable pressure control complete with hardened nozzles.

Hose - 10m of 3/8" double wire braided hose with quick coupling.

OPTIONAL ACCESSORIES

1. Complete Turbo Head with Lance	p/n	JWA160
2. Additional High Pressure Hose (per metre)	p/n	52001
3. High Pressure Swivel	p/n	26105000
4. LS3-1 Foaming Lance with Tank	p/n	JWA221
5. High Pressure Hose Reel (cap 30m or 60m)	p/n	1060CMPL 1065CMPL
6. Sandblasting Kit	p/n	JWA029
7. Sludge Kit	p/n	80005

Product Code	p/n	HW200-15ELCP24
--------------	-----	----------------

TECHNICAL DATA

Working Pressure	psi / bar	3000 / 200
Flow Rate	l/pm	15
Max Water Inlet / Outlet Temp	°c	60 / 130
Class	grade	A (AS/NZS 4233.1:2013)

INTENDED APPLICATION

Usage Frequency	hours / type	4 - 8 daily / Continuous
Category of Dirt / Debris	type	Medium

ELECTRICAL FEATURES

Motor	type	Induction
Power Supply	Ph / V / Hz	3 / 415 / 50
Absorbed Power	HP / kW / pole (rpm)	7.5 / 5.5 / 4 (1450)
Cable Length	metres	5
Control	type	Delayed Timer Stop System™ (DTSS)

HYDRAULIC FEATURES

Pump / Head / Pistons	type	Interpump Plunger Triplex / Brass (nickel plated) / Ceramic
Motor Pump Coupling	type	Rubber soft jaw coupling
Pump Speed	rpm	1450
Unloader Valve	type	Independent
Water Tank	y / n	Y
Safety Valve	y / n	Y
Orifice / Nozzle	size	045

THERMAL FEATURES

Burner Model	type	Vertical V1
Fuel Supply	type	Diesel
Fuel Tank Capacity	litres	27
Burner Fuel Consumption (max)	l/ph	5.74
Coil	type	Mild steel 3mm wall seamless
Housing Material	type	Stainless steel

OTHER FEATURES

Adjustable Pressure	y/n	Y
Hose Reel Provision	y/n	Y
Frame Structure	type	Hot dipped galvanised 4 wheel
Onboard Accessory Storage	y/n	Y
Detergent Injector	y/n	Y - Downstream low pressure adjustable

DIMENSIONS & WEIGHT

Approx Weight	kg	195 unit / 210 boxed
Unit Dimensions	mm	920(L) x 600(W) x 730(H)
Boxed Dimensions	mm	950(L) x 650(W) x 750(H)
Number per Pallet	type: pieces	Custom: 1

WARRANTY(S)

Motor Warranty	years	2	
Limited Pump Warranty	years	2	
Limited Coil Warranty	years	2	
Limited Accessory Warranty	days	90	



The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.