



# JETWAVE®

## HIGH PRESSURE CLEANERS

Distributed by:

# RAIDER™ 1900 (working) 2465 psi (max) • 8 l/pm



Single Phase



Cold Water



Occasional Usage

### FIELDS OF APPLICATION

Concrete and Landscaping  
Household and Path Cleaning  
Agricultural Equipment  
Car and Equipment Yards  
Motorcross Bike Wash-down

The Jetwave® Raider™ is suited for those entry level pressure cleaning jobs. For semi-frequent use, the Raider™ will help around the house and jobs onsite incorporating quality global components.



### STANDOUT FEATURES



Quality solid brass pump head.



Quality induction electric motor with thermal protection.



Built in hose reel including 10m steel armoured hose.



Stainless steel straight lance with brass snap coupling for easy change over nozzle selection.



Total Stop Protection System™ (TSS) for operational longevity.



Quality brass water inlet connection with filter.



0°, 15, 25, 40 and low pressure snap-on nozzle selection.




Ergonomic spray gun with stainless steel back part lance and quick coupling connector.



Jetwave Group  
 72-74 Richmond Road  
 Keswick | Adelaide  
 South Australia | 5035 | AU  
 +61 8 8371 3599  
 sales@jetwave.com.au  
 jetwave.com.au

## STANDARD EQUIPMENT

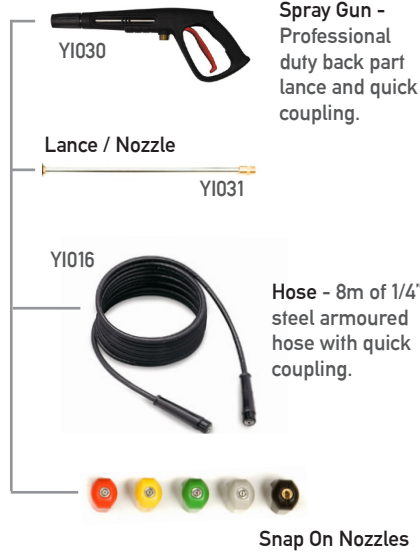

## OPTIONAL ACCESSORIES

1. 10m Additional Steel Armoured Hose	p/n	INCLUDED
2. Turbo Head	p/n	JWA303
3. LS3-1 Foaming Lance with Tank	p/n	JWA221



Product Code	p/n	11183
--------------	-----	-------

## TECHNICAL DATA

Working Pressure	psi / bar	1900 / 130
Maximum Working Pressure	psi / bar	2465 / 170
Flow Rate	l/pm	8
Maximum Flow Rate	l/pm	8.5
Max Water Inlet Temp	°c / °f	55 / 130
Class	grade	A (AS/NZS 4233.1:2013)

## INTENDED APPLICATION

Usage Frequency	hours / type	1-2 daily / Occasional
Category of Dirt / Debris	type	Light

## ELECTRICAL FEATURES

Motor	type	Induction
Power Supply	Ph / V / Hz	1 / 230 / 50
Absorbed Power	kW / Pole (rpm)	2.5 / 2 (2800)
Cable Length	metres	8
Control	type	Total Stop System™ (TSS)

## HYDRAULIC FEATURES

Pump / Head / Pistons	type	Axial / Brass / Stainless Steel
Pump Speed	rpm	2800
Unloader Valve	type	Integral
Orifice / Nozzle	size	03

## OTHER FEATURES

Adjustable Pressure	y / n	N
Frame Structure	type	2 wheel trolley
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Onboard tank adjustable dial

## DIMENSIONS & WEIGHT

Approx Weight	kg	21.5 unit / 23 boxed
Unit Dimensions	mm	780(L) x 590(W) x 900(H)
Boxed Dimensions	mm	900(L) x 680(W) x 700(H)
Number per Pallet	type: pieces	AS: 9 / Euro: 6

## WARRANTY

Domestic Warranty	year	1
Commercial Warranty	months	3
Limited Accessory Warranty	days	90

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.