CONTENTS

PCR TIRE

NAVARRO TIRES

NAVARRO TIRES

5+3 Global Development Layout

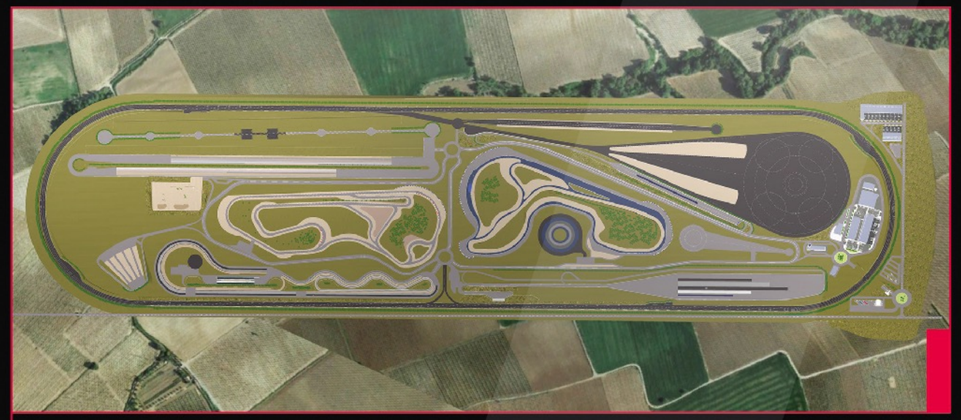

Linglong Group makes the investment and construction of the first specialized large-scale outdoor comprehensive tire proving ground, Sino-Asia Tire Proving Ground, providing a powerful support for the quality improvement and product development of Linglong Tire.

Tire Proving Ground

ATLAS drift team was built to take part in the D1 GRAND PRIX.

Sports Events

① JUVENTUS Official Tire
② Sponsor the VfL Wolfsburg
③ Sponsor the FIBA ZONE 5 Africa Basketball Team
④ Sponsor the Ratchaburi Mitr Phol FC
⑤ 2017 Linglong Tire Youth Football Training Camp Opened in Thailand
⑥ Sponsor China Truck Racing Championship
⑦ Sponsor China Grand Rally
⑧ Sponsor China Volleyball Super League
⑨ Cooperation with World Boxing Female Champion
⑩ ATLAS TIRE CROSSES LOP NUR AND CONQUERS THE GOBI DESERT

Passenger Car Tire | PCR TIRE ATLAS TIRES

LEGEND UHP

UHP Tire with Excellent Wet Grip and Low Noise

1. Excellent handling performance;
2. Improved drainage performance to effectively reduce risk of hydroplaning;
3. Superior driving stability;
4. Comfortable ride;
5. Designed to fit premium cars and sports cars.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.8
205/45R16 XL	87	W	7J	545	290	590	206	7.8
205/50R16	87	W	6 1/2J	545	250	612	214	7.8
205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.8
215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.8
215/45R17 XL	91	W	7J	615	290	626	213	7.8
215/50R17 XL	95	W	7J	690	290	648	226	7.8
215/55R17 XL	98	W	7J	750	290	668	226	7.8
225/40R18 XL	92	W	8J	630	290	637	230	7.8
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.8
225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.8
225/50R17 XL	98	W	7J	750	290	658	233	7.8
225/55R17	97	W	7J	730	250	680	233	7.8
235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.8
235/45ZR17 XL	97	W	8J	730	290	644	236	7.8
235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.8
245/40R17	91	W	8 1/2J	615	250	628	248	7.8
245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.8
245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.8
245/45R17 XL	99	W	8J	775	290	652	243	7.8
245/45R18 XL	100	W	8J	800	290	677	243	7.8
245/45R19	98	Y	8J	750	250	703	243	7.8
255/35R18 XL	94	Y	9J	670	290	635	260	7.8
255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.8

NAVARRO TIRES

WONDER HP

Budget Tire

1. Low noise;
2. Excellent wet performance.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/70R12	80	H	5.00B	450	250	551	177	7.7
185/60R13	80	V	5.50B	450	250	552	189	7.7
185/80R14	91	T	5J	615	250	652	184	7.7

FORCE HP

(Three circumferential pattern grooves)
All-season Tire

1. Open shoulder groove design for superior safety and quiet ride.
2. Straight center pattern blocks for more comfortable ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/65R15	84	H	5J	500	250	609	177	7.7
175/70R13 WR	82	H	5.00B	475	250	576	177	7.2
185/55R15	82	V	6J	475	250	585	194	7.8
185/60R13 WR	80	H	5 1/2J	450	250	552	189	7.2
185/60R14	82	H	5 1/2J	475	250	578	189	7.8
185/65R14	86	H	5 1/2J	530	250	596	189	7.8
185/65R15	88	H	5 1/2J	560	250	621	189	7.8
195/50R15	82	H	6J	475	250	577	201	7.9
195/50R16	84	V	6J	500	250	602	201	7.9
195/55R15	85	V	6J	515	250	595	201	7.9
195/55R16	87	V	6J	545	250	620	201	7.9
195/60R15	88	H	6J	560	250	615	201	7.9
195/65R15	91	H	6J	615	250	635	201	7.9

FORCE HP

(Four circumferential pattern grooves)
All-season Tire

1. Open shoulder groove design for superior safety and quiet ride.
2. Straight center pattern blocks for more comfortable ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/50R16	87	V	6 1/2J	545	250	612	214	8.0
205/50R17 XL	93	V	6 1/2J	650	290	638	214	8.0
205/55R16	91	V	6 1/2J	615	250	632	214	8.0
205/60R15	91	H	6J	615	250	627	209	8.0
205/60R16	92	V	6J	630	250	652	209	8.0
205/65R15	94	H	6J	670	250	647	209	8.0
205/65R16	95	H	6J	690	250	672	209	8.0
215/45R17 XL	91	V	7J	615	290	626	213	8.1
215/50R17 XL	95	V	7J	690	290	648	226	8.1
215/55R16 XL	97	H	7J	730	290	642	226	8.1
215/55R17	94	V	7J	670	250	668	226	8.1
215/60R15	94	H	6 1/2J	670	250	639	221	8.1
215/60R16	95	V	6 1/2J	690	250	664	221	8.1
215/65R16	98	H	6 1/2J	750	250	686	221	8.1
225/40R18 XL	92	V	8J	630	290	637	230	8.2
225/45R17 XL	94	V	7 1/2J	670	290	634	225	8.2
225/45R18 XL	95	V	7 1/2J	690	290	659	225	8.2
225/50R17 XL	98	V	7J	750	290	658	233	8.2
225/50R18 XL	99	V	7J	775	290	683	233	8.2
225/55R16	95	V	7J	690	250	654	233	7.9
225/55R17	97	V	7J	730	250	680	233	8.2
225/55R18	98	V	7J	750	250	705	233	8.2
225/60R16	98	H	6 1/2J	750	250	676	228	8.2
225/60R17	99	H	6 1/2J	775	250	702	228	8.2
225/60R18	100	H	6 1/2J	800	250	727	228	8.2
225/65R16	100	H	6 1/2J	800	250	698	228	8.2
225/65R17	102	H	6 1/2J	850	250	724	228	8.2
235/40R18 XL	95	V	8 1/2J	690	290	645	241	8.3
235/45R17 XL	97	V	8J	730	290	644	236	8.3
235/45R18	94	V	8J	670	250	669	236	8.3
235/50R18	97	V	7 1/2J	730	250	693	245	8.3
235/55R17	99	V	7 1/2J	775	250	690	245	8.3
235/55R18	100	V	7 1/2J	800	250	715	245	8.3
235/55R19	101	V	7 1/2J	825	250	741	245	8.3
235/60R16	100	H	7J	800	250	688	240	8.3
235/60R17	102	H	7J	850	250	714	240	8.3
235/60R18	103	V	7J	875	250	739	240	8.3
235/65R17	104	H	7J	900	250	738	240	8.3
245/40R18 XL	97	V	8 1/2J	730	290	653	248	8.4
245/40R19 XL	98	V	8 1/2J	750	290	679	248	8.4
245/45R17 XL	99	V	8J	775	290	652	243	8.4
245/45R18 XL	100	V	8J	800	290	677	243	8.4
245/45R20	99	V	8J	775	250	728	243	8.4
245/50R17	99	V	7 1/2J	775	250	678	253	8.4
245/50R20	102	V	7 1/2J	850	250	754	253	8.4
255/50R19 XL	107	V	8J	975	290	739	265	8.5

NAVARRO TIRES

Passenger Car Tire | PCR TIRE ATLAS TIRES

LAND SPORT

Super Wear Resistance

1. Ultra mileage tire;
2. Low noise;
3. Improved water evacuation.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/60R15	84	H	5 1/2J	500	250	603	189	8.0
185/65R14	86	H	5 1/2J	530	250	596	189	7.7
185/65R15	88	H	5 1/2J	560	250	621	189	7.7
195/60R15	88	H	6J	560	250	615	201	8.5
195/65R15	91	H	6J	615	250	635	201	8.5
205/50R17 XL	93	V	6 1/2J	650	290	638	214	7.5
205/55R16	91	V	6 1/2J	615	250	632	214	8.5
205/60R15	91	H	6J	615	250	627	209	8.5
205/60R16	92	V	6J	630	250	652	209	8.7
205/65R15	94	V	6J	670	250	647	209	8.5
205/65R16	95	H	6J	690	250	672	209	8.5
215/45R17 XL	91	V	7J	615	290	626	213	7.5
215/50R17 XL	95	V	7J	690	290	648	226	7.5
215/55R16 XL	97	V	7J	730	290	642	226	7.5
215/55R17	94	V	7J	670	250	668	226	7.5
215/60R16	95	V	6 1/2J	690	250	664	221	8.7
215/65R17	99	T	6 1/2J	775	250	712	221	8.8
215/70R15	98	H	6 1/2J	750	250	683	221	9.1
225/40R18 XL	92	V	8J	630	290	637	230	7.5
225/45R17 XL	94	V	7 1/2J	670	290	634	225	7.5
225/45R18 XL	95	V	7 1/2J	690	290	659	225	7.5
225/50R17 XL	98	V	7J	750	290	658	233	7.5
225/65R16	100	H	6 1/2J	800	250	698	228	8.7
235/45R17 XL	97	V	8J	730	290	644	236	7.8
245/45R18 XL	100	V	8J	800	290	677	243	7.5

UHP+

Ultra high performance tire

Strong grip with good steering performance;

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/50ZR17 XL	93	W	6 1/2J	650	290	638	214	7.9
215/35ZR18 XL	84	Y	7 1/2J	500	290	607	218	7.9
215/40ZR18 XL	89	W	7 1/2J	580	290	629	218	7.9
225/35ZR20 XL	90	Y	8J	600	290	666	230	7.9
235/50ZR18	97	W	7 1/2J	730	250	693	245	7.9
245/35ZR19 XL	93	Y	8 1/2J	650	290	655	248	7.9
245/35ZR20 XL	95	Y	8 1/2J	690	290	680	248	7.9
245/45ZR17	95	W	8J	690	250	652	243	7.9
245/45ZR18 XL	100	W	8J	800	290	677	243	7.9
255/30R24 XL	97	W	9J	730	290	764	260	8.5
255/35ZR20 XL	97	Y	9J	730	290	686	260	7.9
265/35R22 XL	102	V	9 1/2J	850	290	745	271	8.5
265/35ZR18 XL	97	Y	9 1/2J	730	290	643	271	7.9
275/25R24 XL	95	W	10J	690	290	748	283	8.5
275/30R20 XL	97	W	9 1/2J	730	290	674	278	8.5
275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.5
275/45R20 XL	110	V	9J	1060	290	756	273	8.5
275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.5
285/30R20 XL	99	W	10J	775	290	680	290	8.5
285/50R20 XL	116	V	9J	1250	290	794	297	8.5
295/30R26 XL	107	W	10 1/2J	975	290	838	301	8.5
305/30R26 XL	109	W	11J	1030	290	844	313	8.5
305/35R24 XL	112	V	11J	1120	290	824	313	8.5
305/40R22 XL	114	V	11J	1180	290	803	313	8.5
305/45R22 XL	118	V	10J	1320	290	833	303	8.5

NAVARRO TIRES

FORCE UHP

High handling performance SUV UHP tire

1.Excellent dry and wet handling performance;
2.Asymmetric tread pattern design for better drainage performance inside and grip performance outside,excellent steering performance.
3.Wide tread surface for superior comfortable ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/35R18 XL	79	W	7J	437	290	597	200	7.7
195/40R17 XL	81	V	7J	462	290	588	200	7.7
195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.7
195/45R17 XL	85	W	6 1/2J	515	290	608	195	7.7
205/35R18 XL	81	W	7 1/2J	462	290	601	212	7.7
205/40R18 XL	86	W	7 1/2J	530	290	621	212	7.7
205/45R17 XL	88	W	7J	560	290	616	206	7.7
205/50R16	87	W	6 1/2J	545	250	612	214	7.7
205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.7
205/55R16	91	W	6 1/2J	615	250	632	214	7.7
215/30R20 XL	82	W	7 1/2J	475	290	641	218	7.7
215/35R19 XL	85	V	7 1/2J	515	290	633	218	7.7
215/40R18	85	Y	7 1/2J	515	250	629	218	7.8
215/45R17 XL	91	W	7J	615	290	626	213	7.8
215/45R18 XL	93	Y	7J	650	290	651	213	7.8
215/50R16 XL	94	W	7J	670	290	622	226	7.7
215/50R17 XL	95	W	7J	690	290	648	226	7.8
215/55R16 XL	97	W	7J	730	290	642	226	7.8
215/55R17	94	W	7J	670	250	668	226	7.8
225/30R20	85	W	9J	515	250	662	260	7.9
225/35R18 XL	87	W	8J	545	290	615	230	7.7
225/35R19 XL	88	W	8J	560	290	641	230	7.7
225/35R20 XL	90	W	8J	600	290	666	230	7.9
225/40R18 XL	92	Y	8J	630	290	637	230	7.9
225/40R19 XL	93	Y	8J	650	290	663	230	7.9
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.9
225/45R18 XL	95	Y	7 1/2J	690	290	659	225	7.9
225/45R19 XL	96	Y	7 1/2J	710	290	685	225	7.9
225/50R16	92	W	7J	630	250	632	233	7.9
225/50R17 XL	98	W	7J	750	290	658	233	7.9
225/50R18	95	W	7J	690	250	683	233	7.9
225/55R16	95	W	7J	690	250	654	233	7.9
225/55R17	97	W	7J	730	250	680	233	7.9
235/30R20 XL	88	W	8 1/2J	560	290	650	242	7.7
235/35R19 XL	91	Y	8 1/2J	615	290	647	241	7.7
235/35R20 XL	92	W	8 1/2J	630	290	672	241	7.7
235/35R21	89	W	8 1/2J	580	250	702	241	7.7
235/40R18 XL	95	Y	8 1/2J	690	290	645	241	8.0
235/40R19 XL	96	Y	8 1/2J	710	290	671	241	8.0
235/45R17 XL	97	W	8J	730	290	644	236	8.0
235/45R18 XL	98	Y	8J	750	290	669	236	8.0
235/50R17	96	W	7 1/2J	710	250	668	245	8.0
235/50R18	97	Y	7 1/2J	730	250	693	245	8.0
235/55R17	99	W	7 1/2J	775	250	690	245	8.0
235/55R19 XL	105	Y	7 1/2J	925	290	741	245	8.0
245/30R20 XL	90	W	8 1/2J	600	290	656	248	7.7
245/30R21 XL	91	W	8 1/2J	615	290	681	248	7.7
245/30R22 XL	92	W	8 1/2J	630	290	707	248	8.1
245/35R19 XL	93	W	8 1/2J	650	290	655	248	7.7
245/35R20 XL	95	W	8 1/2J	690	290	680	248	8.1
245/35R21 XL	96	W	8 1/2J	710	290	705	248	7.7
245/40R17	91	W	8 1/2J	615	250	628	248	8.1
245/40R18 XL	97	Y	8 1/2J	730	290	653	248	8.1
245/40R19 XL	98	Y	8 1/2J	750	290	679	248	8.1
245/40R20 XL	99	Y	8 1/2J	775	290	704	248	8.1
245/45R17 XL	99	W	8J	775	290	652	243	8.1
245/45R18 XL	100	Y	8J	800	290	677	243	8.1
245/45R19 XL	102	W	8J	850	290	703	243	8.1
245/45R20 XL	103	Y	8J	875	290	728	243	8.1
245/50R18	100	Y	7 1/2J	800	250	703	253	8.1
245/50R19 XL	105	W	7 1/2J	925	290	729	253	8.1
245/50R20	102	V	7 1/2J	850	250	754	253	8.2
245/55R19	103	V	7 1/2J	875	250	753	253	8.2
245/65R17 XL	111	H	7J	1090	290	750	248	8.2
255/30R20 XL	92	W	9J	630	290	662	260	7.7
255/30R21 XL	93	W	9J	650	290	687	260	7.7
255/30R22 XL	95	W	9J	690	290	713	260	8.2

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
255/30R24 XL	97	W	9J	730	290	764	260	8.2
255/30R26 XL	99	W	9J	775	290	814	260	8.2
255/35R18 XL	94	Y	9J	670	290	635	260	8.2
255/35R19 XL	96	Y	9J	710	290	661	260	8.2
255/35R20 XL	97	Y	9J	730	290	686	260	8.2
255/40R17 XL	98	W	9J	750	290	636	260	7.7
255/40R18 XL	99	Y	9J	775	290	661	260	8.2
255/40R19 XL	100	Y	9J	800	290	687	260	8.2
255/40R20 XL	101	W	9J	825	290	712	260	8.2
255/45R18 XL	103	W	8 1/2J	875	290	687	255	8.2
255/45R19 XL	104	Y	8 1/2J	900	290	713	255	8.2
255/45R20 XL	105	Y	8 1/2J	925	290	738	255	8.2
255/50R19 XL	107	Y	8J	975	290	739	265	8.2
255/50R20 XL	109	Y	8J	1030	290	764	265	8.2
255/55R18 XL	109	W	8J	1030	290	737	265	8.2
255/60R19	109	H	7 1/2J	1030	250	789	260	8.2
265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.7
265/30R22 XL	97	W	9 1/2J	730	290	719	271	7.7
265/35R18 XL	97	W	9 1/2J	730	290	643	271	8.3
265/35R20 XL	99	Y	9 1/2J	775	290	694	271	8.3
265/35R22 XL	102	V	9 1/2J	850	290	745	271	7.7
265/40R18 XL	101	Y	9 1/2J	825	290	669	271	8.3
265/40R19 XL	102	Y	9 1/2J	850	290	695	271	8.3
265/40R21 XL	105	V	9 1/2J	925	290	745	271	8.2
265/40R22 XL	106	V	9 1/2J	950	290	771	271	8.2
265/45R20 XL	108	Y	9J	1000	290	746	266	8.3
265/50R19 XL	110	W	8 1/2J	1060	290	749	277	8.3
265/50R20 XL	111	V	8 1/2J	1090	290	774	277	8.2
275/25R24 XL	96	W	10J	710	290	748	283	8.2
275/25R26 XL	98	W	10J	750	290	798	283	8.2
275/25R28 XL	99	W	10J	775	290	852	281	8.2
275/25R30 XL	101	W	10J	825	290	900	283	8.2
275/30R19 XL	96	W	9 1/2J	710	290	649	278	8.2
275/30R20 XL	97	Y	9 1/2J	730	290	674	278	8.4
275/30R24 XL	101	W	9 1/2J	825	290	776	278	8.2
275/35R18	95	Y	9 1/2J	690	250	649	278	8.4
275/35R19 XL	100	Y	9 1/2J	800	290	675	278	8.4
275/35R20 XL	102	Y	9 1/2J	850	290	700	278	8.4
275/35R21	99	W	9 1/2J	775	250	725	278	8.2
275/40R17	98	W	9 1/2J	750	250	652	278	8.4
275/40R18 XL	103	Y	9 1/2J	875	290	677	278	8.4
275/40R19 XL	105	Y	9 1/2J	925	290	703	278	8.4
275/40R20 XL	106	Y	9 1/2J	950	290	728	278	8.4
275/45R19 XL	108	W	9J	1000	290	731	273	8.2
275/45R20 XL	110	W	9J	1060	290	756	273	8.4
275/55R19	111	W	8 1/2J	1090	250	785	284	8.2
285/25R20 XL	93	W	10 1/2J	650	290	650	295	7.7
285/25R22 XL	95	Y	10 1/2J	690	290	701	295	7.7
285/30R21 XL	100	Y	10J	800	290	705	290	7.7
285/35R19 XL	103	Y	10J	875	290	683	290	8.5
285/35R22 XL	106	W	10J	950	290	759	290	8.5
285/40R22 XL	110	V	10J	1060	290	787	290	8.2
285/45R19 XL	111	W	9 1/2J	1090	290	739	285	8.2
285/45R22 XL	114	V	9 1/2J	1180	290	815	285	8.2
285/50R20	112	V	9J	1120	250	794	297	8.2
295/25R20 XL	95	Y	10 1/2J	690	290	656	301	7.7
295/25R22 XL	97	W	10 1/2J	730	290	707	301	7.7
295/25R28 XL	103	V	10 1/2J	875	290	859	301	8.2
295/30R19 XL	100	W	10 1/2J	800	290	661	301	7.7
295/30R26 XL	107	W	10 1/2J	975	290	838	301	8.2
295/35R21 XL	107	Y	10 1/2J	975	290	739	301	8.6
295/35R24 XL	110	V	10 1/2J	1060	290	816	301	8.2
305/25R20 XL	97	Y	11J	730	290	660	313	8.2
305/25R22 XL	99	Y	11J	775	290	711	313	8.2
305/30R18	97	W	11J	730	250	644	313	8.2
305/30R26 XL	109	W	11J	1030	290	844	313	8.2
305/35R24 XL	112	V	11J	1120	290	824	313	8.2
305/40R22 XL	114	V	11J	1180	290	803	313	8.2
305/45R22 XL	118	V	10J	1320	290	833	303	8.2
315/35R20 XL	110	W	11J	1060	290	728	320	8.2

NAVARRO TIRES

PRIVA A/T

All Terrain Tire with High Wear Resistance

1. Excellent wet performance;
2. Large angle grooves to improve self-cleaning ability;
3. An optimal balance between performance on road and off road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205R16LT	8PR	110/108	T	6J	D1000 S1060	450	734	208	12.7
LT235/85R16	10PR	120/116	Q	6 1/2J	D1260 S1380	550	806	235	12.7
LT245/75R16	10PR	120/116	Q	7J	D1260 S1380	550	774	248	12.7
LT265/70R17	10PR	121/118	R	8J	D1320 S1450	550	804	272	12.7
LT265/75R16	10PR	123/120	R	7 1/2J	D1400 S1550	550	804	267	12.7
LT285/75R16	10PR	126/123	R	8J	D1550 S1700	550	834	286	12.7
31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	12.7
235/70R16	—	106	T	7J	950	250	736	240	11.0
235/75R15 XL	—	109	T	6 1/2J	1030	290	733	235	11.0
245/65R17 XL	—	111	T	7J	1090	290	750	248	11.0
245/70R16 XL	—	111	T	7J	1090	290	750	248	11.0
265/70R16	—	112	T	8J	1120	250	778	272	11.0
265/70R17	—	115	T	8J	1215	250	804	272	11.0

PRIVA M/T

Mud-terrain Tire

1、High floatation;
2、Higher load-carrying capacity;
3、Excellent self-cleaning performance;
4、Aggressive tread pattern and sidewall design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
LT265/75R16 OWL	10PR	123/120	Q	7 1/2J	D1400 S1550	550	804	267	14.7
LT265/70R17 OWL	10PR	121/118	Q	8J	D1320 S1450	550	810	272	14.4
LT275/70R18 OWL	10PR	125/122	Q	8J	D1500 S1650	550	849	279	14.4
LT285/70R17 OWL	10PR	121/118	Q	8 1/2J	D1320 S1450	550	838	292	14.4
LT285/75R16 OWL	10PR	126/123	Q	8J	D1550 S1700	550	834	286	14.4
LT295/60R20	10PR	126/123	Q	8 1/2J	D1550 S1700	550	868	299	15.9
LT295/70R17	10PR	121/118	Q	8 1/2J	D1320 S1450	550	852	299	14.7
LT295/70R18	10PR	129/126	Q	8 1/2J	D1700 S1850	550	877	299	14.7
LT305/60R18	10PR	121/118	Q	9J	D1320 S1450	450	829	311	15.9
LT305/65R17	10PR	121/118	Q	9J	D1320 S1450	450	834	311	15.9
LT305/70R16 OWL	10PR	124/121	Q	9J	D1450 S1600	450	840	311	14.4
LT305/70R18	10PR	126/123	Q	9J	D1550 S1700	450	891	311	15.9
LT315/70R17	10PR	121/118	Q	9 1/2J	D1320 S1450	450	880	323	15.9
LT315/75R16 OWL	10PR	127/124	Q	8 1/2J	D1600 S1750	450	884	313	14.4
LT375/65R16	8PR	126/123	Q	11J	D1550 S1700	350	900	382	15.9
31X10.50R15LT OWL	6PR	109	Q	8 1/2J	1030	350	781	268	14.3
33X12.50R15LT OWL	6PR	108	Q	10J	1000	250	832	318	14.3
33X12.50R18LT OWL	10PR	118	Q	10J	1320	450	832	318	15.8
33X12.50R20LT OWL	10PR	114	Q	10J	1180	450	832	318	15.8
33X12.50R22LT	10PR	109	Q	10J	1030	450	826	318	15.8
35X12.50R15LT	6PR	113	Q	10J	1150	250	883	318	15.9
35X12.50R17LT OWL	10PR	121	Q	10J	1450	450	883	318	15.8
35X12.50R18LT OWL	10PR	123	Q	10J	1550	450	883	318	15.9
35X12.50R20LT OWL	10PR	121	Q	10J	1450	450	883	318	15.8
35X12.50R22LT OWL	10PR	117	Q	10J	1285	450	877	318	15.8
36X15.50R20LT	10PR	126	Q	12 1/2J	1700	450	908	395	15.9
37X12.50R17LT	8PR	124	Q	10J	1600	350	934	318	15.9
37X13.50R18LT	8PR	124	Q	11J	1600	350	934	345	15.9
37X13.50R20LT	10PR	127	Q	11J	1750	450	934	345	15.9
38X15.50R20LT OWL	8PR	125	Q	12 1/2J	1650	350	959	395	15.9
40X13.50R17LT	6PR	121	Q	11J	1450	250	1010	345	15.9
40X14.50R20LT	8PR	128	Q	11 1/2J	1800	350	1010	367	15.9

NAVARRO TIRES

CROSSWIND 4x4 HP

SUV tire with low rolling resistance and low noise

1. Excellent handling performance;
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
255/55R19 XL	111	V	8J	1090	290	763	265	8.2

CROSSWIND A/T

All Terrain Tire

1.Excellent wet performance;
2.Large angle grooves to improve self-cleaning ability;
3.An optimal balance between performance on road and off road.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
265/65R17	112	T	8J	1120	250	776	272	10.7
265/60R18	110	T	8J	1060	250	775	272	11.0

CROSSWIND M/T

Mud-Terrain Tire

1. High floatation;
2. Higher load-carrying capacity;
3. Excellent Self-cleaning performance;
4. Aggressive tread pattern and sidewall design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
LT225/75R16	8PR	110/107	Q	6J	D975 S1060	450	750	223	13.7
LT235/85R16	10PR	120/116	Q	6 1/2J	D1260 S1380	550	806	235	13.7
LT245/75R16	10PR	120/116	Q	7J	D1260 S1380	550	774	248	13.7
LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 S1550	550	810	267	14.7
LT285/75R16	10PR	126/123	Q	8J	D1550 S1700	550	840	286	14.7
LT305/70R17	8PR	119/116	Q	9J	D1250 S1360	350	866	311	14.7
30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	756	240	13.7
31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	781	268	14.7

NAVARRO TIRES

SUV Tire | PCR TIRE ATLAS TIRES

PARALLER A/T

All-terrain Tire For Light Trucks And SUVs

1. Versatile, all-terrain tread pattern provides confident handling on and off-road.
2. Microgrooves in tread enhance traction in wet or muddy conditions.
3. Aggressive sidewall protectors are strategically located near the tire's shoulders to increase loose-surface bite while they resist cuts and abrasions from rocks and stumps.
4. New tread compound formula enhances treadwear and grip

Size	Load Index / Speed Symbol	Load Range	Standar Rim	UTQG	Max. Load (lbs)	Max. Inflation (psi)	Overall Diam. (Inch)	Tread Depth (32 nds)
31X10.50R15LT OWL	109R	6PR	8 1/2J		2,270	51	31	15
235/75R15 OWL	109T		6 1/2J	560/A/B	2,271	42	29	12
LT235/75R15	104/101R	6PR	6 1/2J		D 1820 S 1985	50	29	14
235/70R16 OWL	106T		7J	560/A/B	2,094	36	29	12
245/70R16	111T	XL	7J	560/A/B	2,403	42	30	13
255/70R16	111S		7 1/2J	560/A/B	2,403	36	30	13
265/70R16 OWL	112T		8J	560/A/B	2,469	36	31	13
LT245/75R16 OWL	120/116Q	10PR	7J		D 2778 S 3042	80	30	15
LT265/75R16 OWL	123/120R	10PR	7 1/2J		D 3086 S 3417	80	32	15
LT285/75R16 OWL	126/123R	10PR	8J		D 3415 S 3750	80	33	16
245/75R16	111T		7J	560/A/B	2,403	36	30	13
265/75R16	116T		7 1/2J	560/A/B	2,756	36	32	13
LT225/75R16	115/112Q	10PR	6J		D 2470 S 2680	80	29	14
LT215/85R16	115/112Q	10PR	6J		D 2470 S 2680	80	30	14
LT235/85R16 OWL	120/116S	10PR	6 1/2J		D 2778 S 3042	80	32	14
265/65R17	112T		8J	560/A/B	2,469	36	31	13
LT245/70R17	119/116Q	10PR	7J		D 2755 S 3000	80	31	15
LT265/70R17 OWL	121/118R	10PR	8J		D 2910 S 3195	80	32	15
265/70R17 OWL	115T		8J	560/A/B	2,679	36	32	13
LT245/75R17	121/118R	10PR	7J		D 2910 S 3195	80	32	15
LT235/80R17	120/117R	10PR	6 1/2J		D 2835 S 3085	80	32	14
LT275/65R18	123/120S	10PR	8J	560/A/B	D 3085 S 3415	80	32	15
LT275/65R18 OWL	116T		8J	560/A/B	2,756	36	32	13
LT275/70R18	125/122S	10PR	8J		D 3305 S 3640	80	33	15