



Outdoor Fans Cooling Digital Signage

Standard Wall Mounted Type



Durable
Materials



3000 nits
High brightness



Auto Temp.
adjust



24/7 Usage



IP65



CMS



Support
customization




Auto brightness



Various touch
technology optional



Product three views

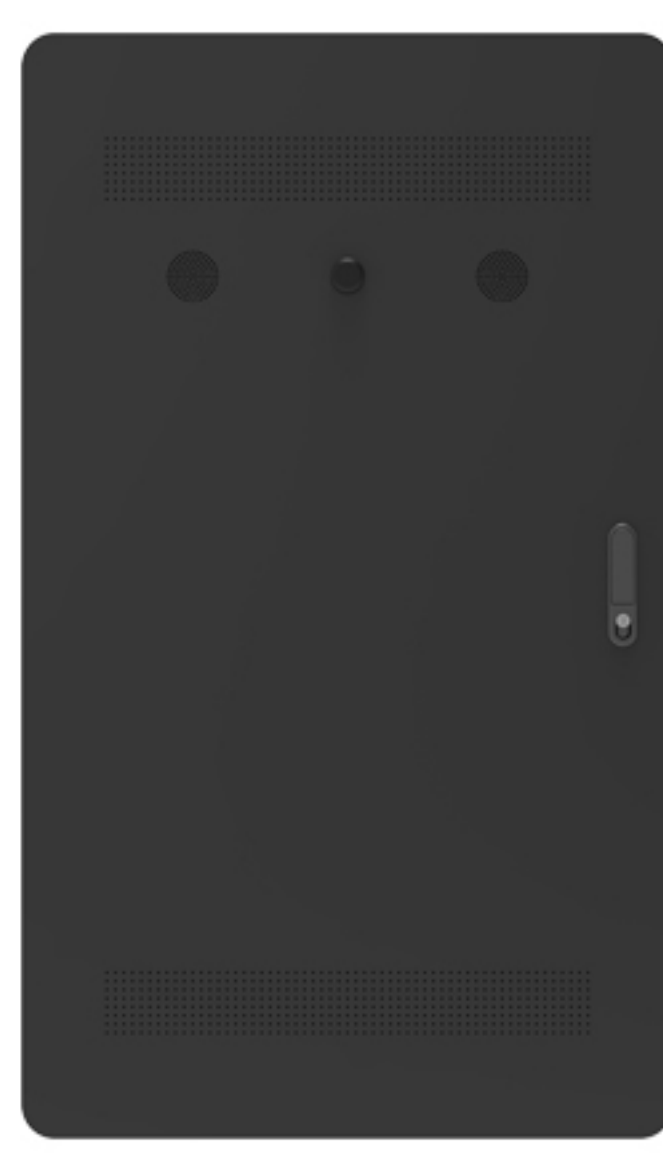

📍 B101 Changxing Building, Daguan Industrial Park, Tianhe District, Guangzhou

🌐 www.gzzemso.com / www.zemsotech.com / www.zemso.com




Highlight, clear and eye-catching

The bright screen is clearer than the ordinary screen in the area with strong light




3000 nits

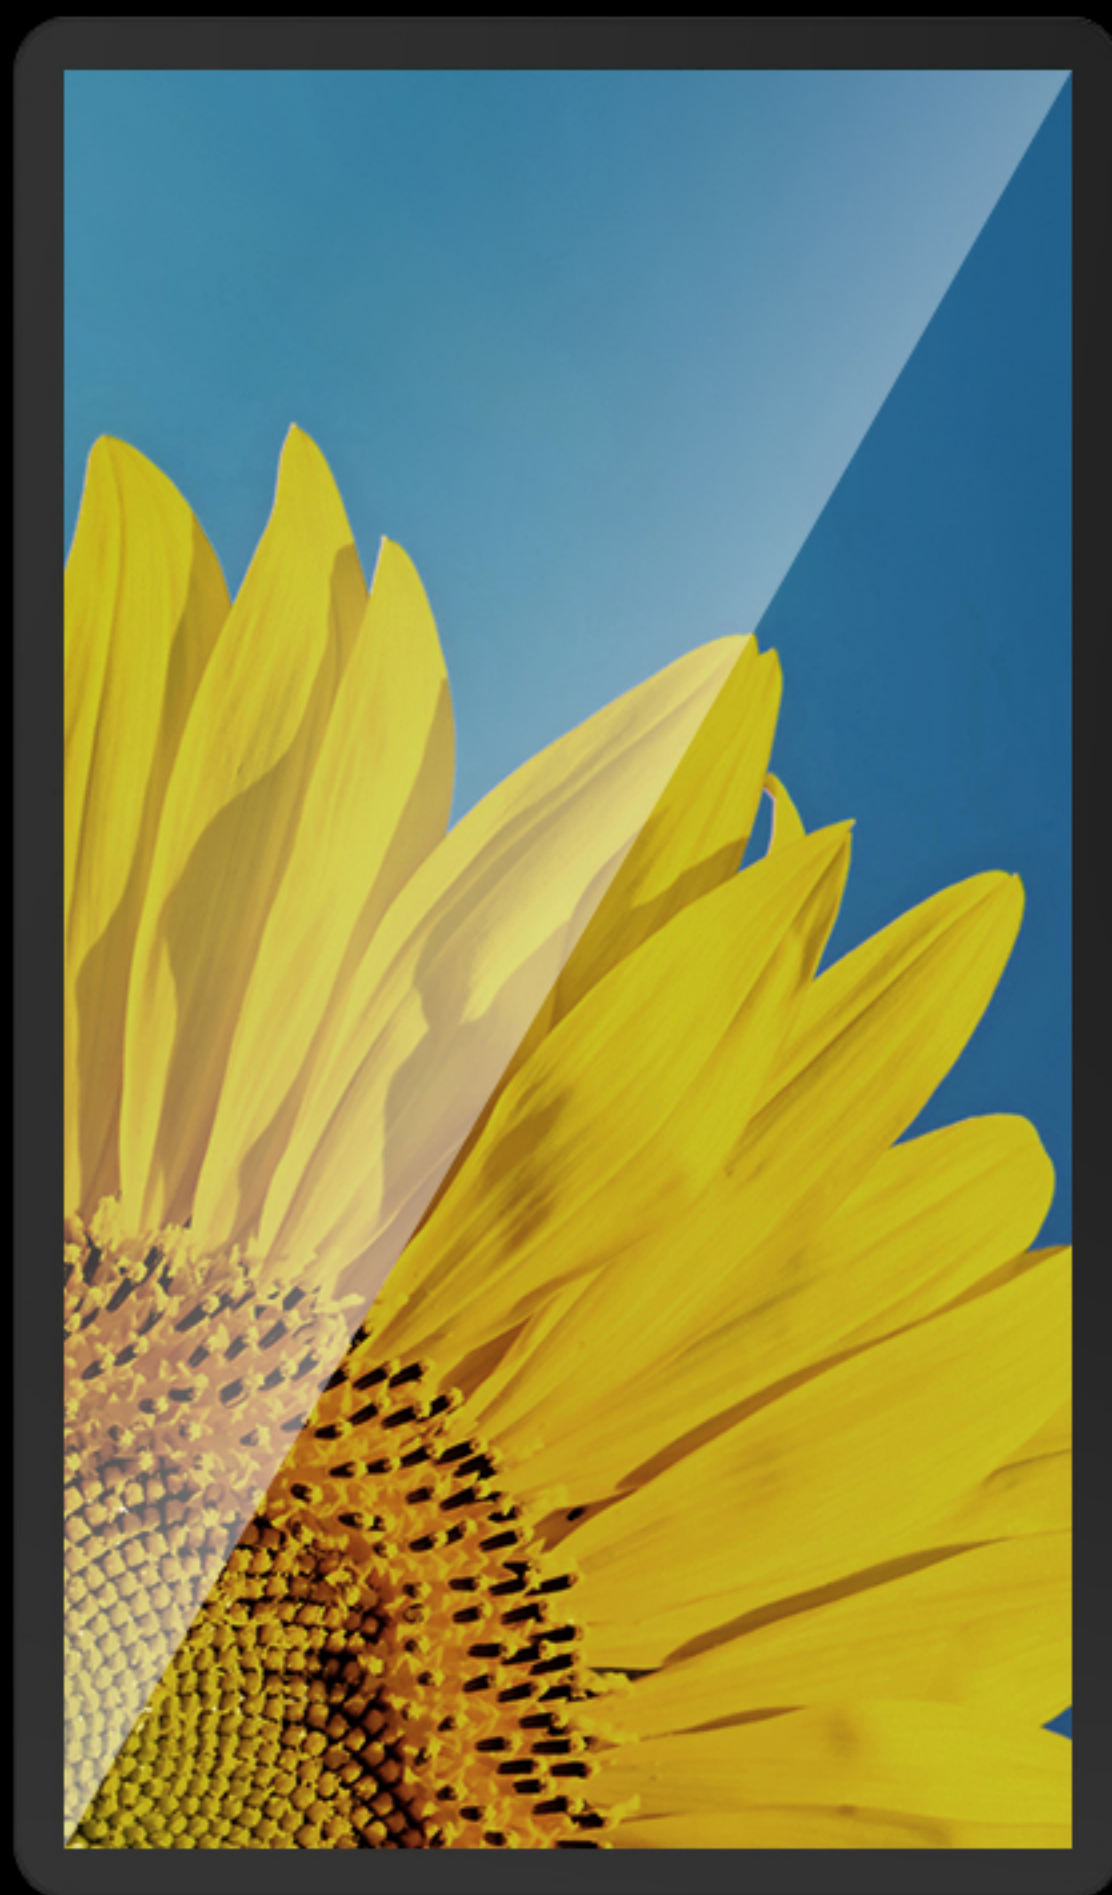


2000nits


Rich External Interface(Optional)

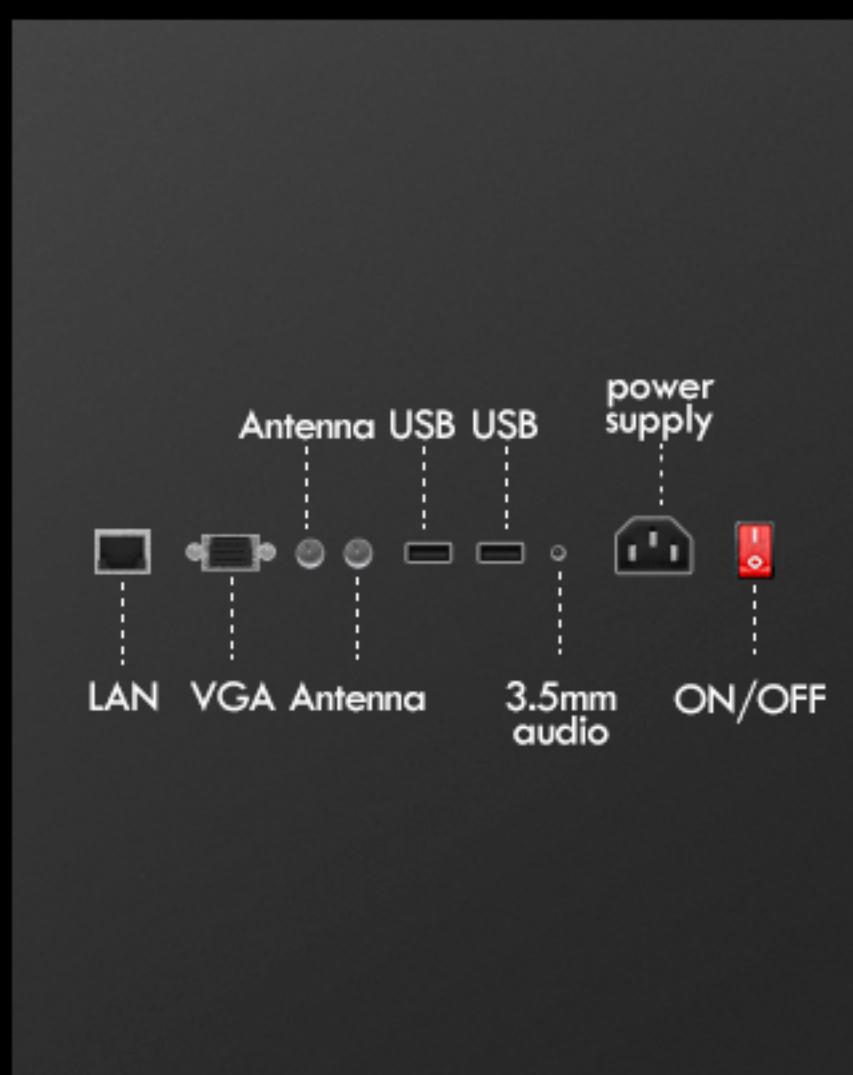

Windows

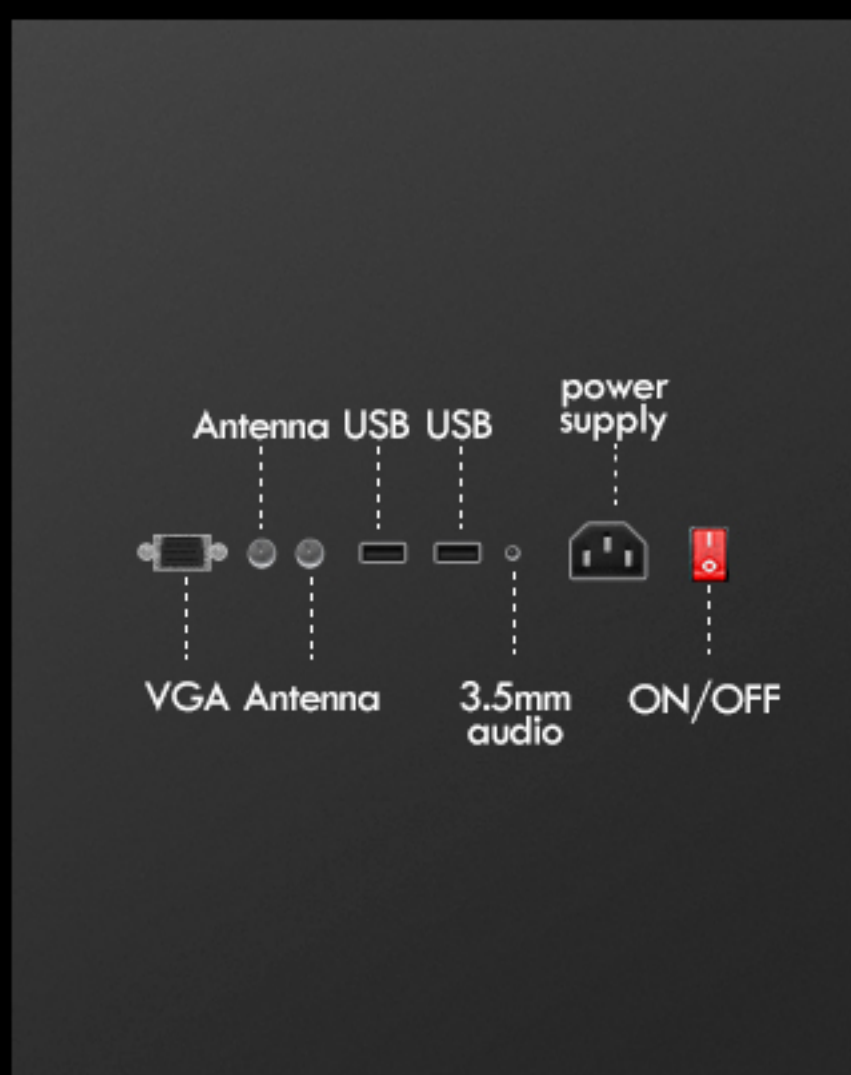

Android

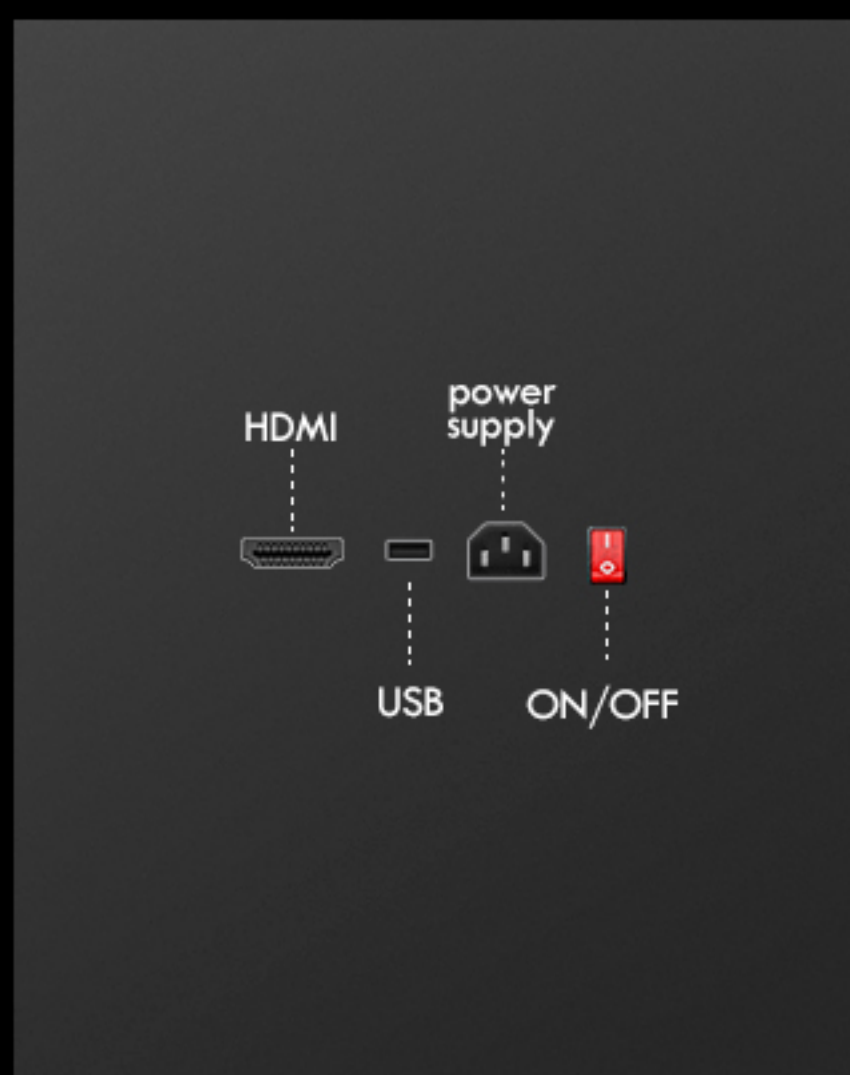

Stand-alone




Remotely publish smart split screen


Multimedia publishing platform,cloud background remote operation,
multi-region,multi-terminal unified management publishing




Cloud platform release

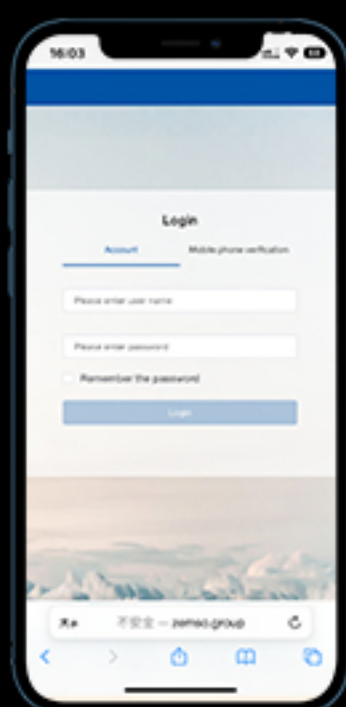


Mobile phone released

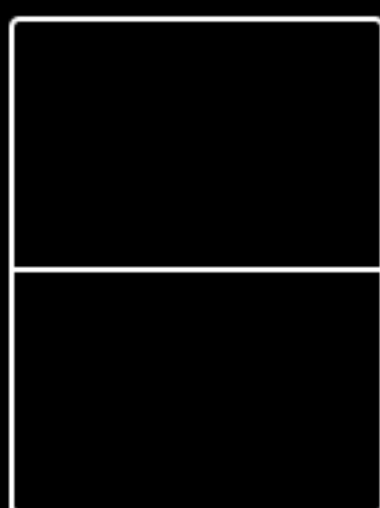


Dual screen

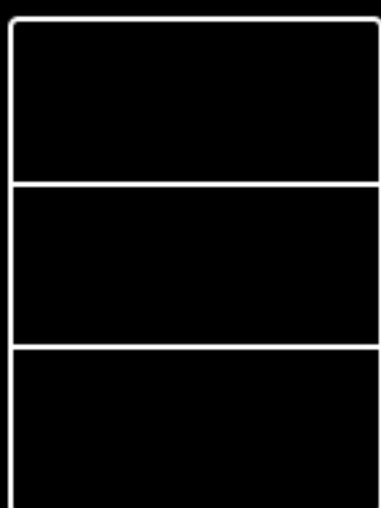

Three split
screen

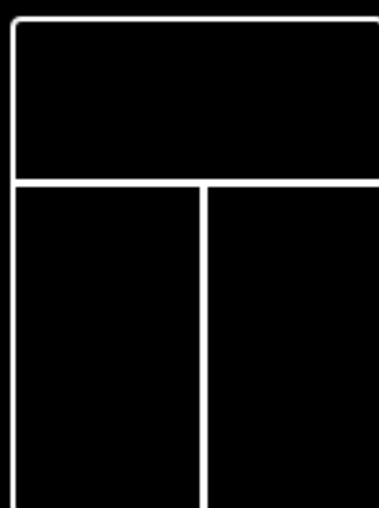


Three split
screen

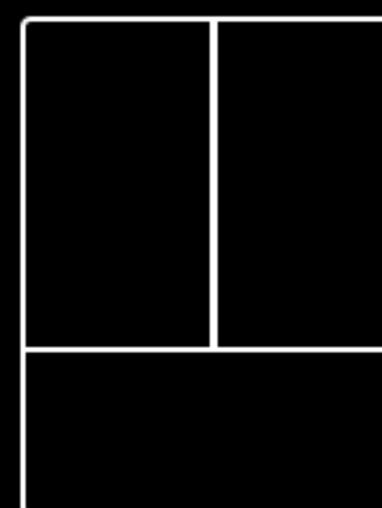

Three split
screen

Optional size

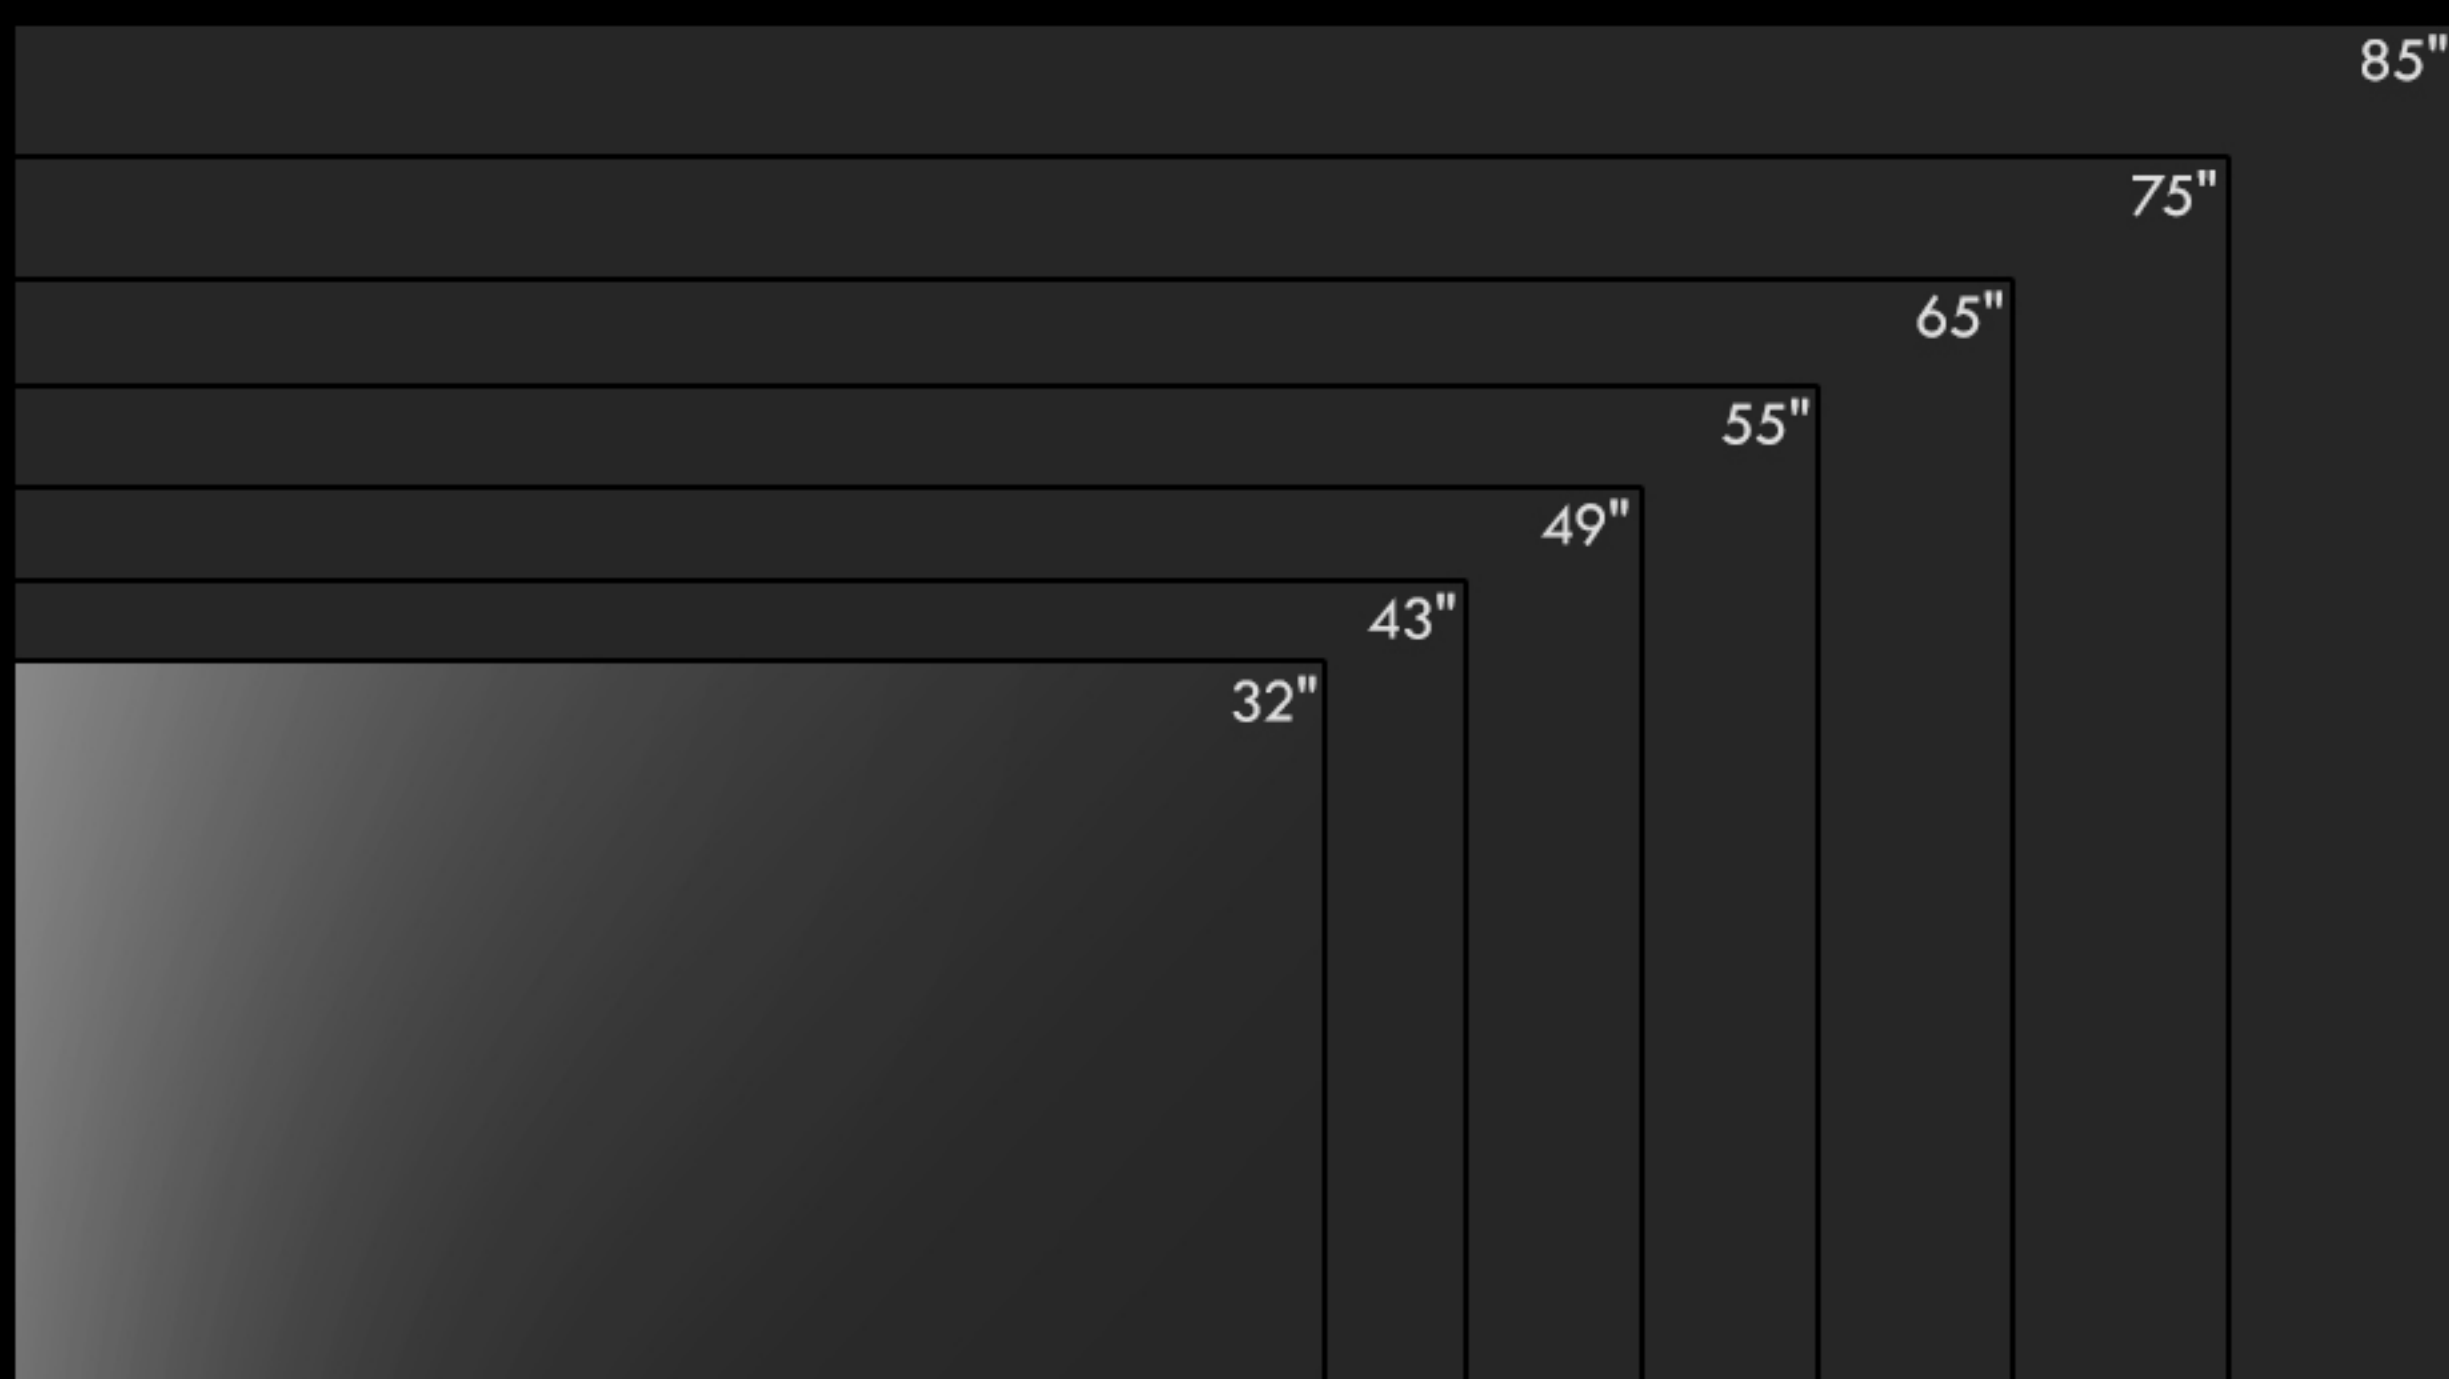



Product parameters

| | | |
|-----------------------|-----------------------------------|---|
| Case | Material | 1.5mm SGCC Gavanized plate |
| | Surface treatment | Powder coated |
| | Front panel | 6mm Tempered glass |
| | Thickness | 120mm |
| | Bezel | 40mm, Equal sides |
| | IP rating | IP65 |
| Panel | LCD panel | LG/BOE/AUO, -20℃~110℃ |
| | Brightnes (cd/m²) | 3000 |
| | Contrast ratio | 3000:1 |
| | View angle | 178 (H/V) |
| | Response time | 6ms |
| | Brightness adjustable | Auto-light sensor |
| Electrical | Operation system | Android 8.1 (Windows optional) |
| | CPU | ARM A53×4, 1.5Ghz |
| | DDR size | 2G |
| | EMMC flash | 8G (16G optional) |
| | Ports | HDMI input×3, USB input×2, Power×1 |
| Power Supply | Input Voltage | AC100-240V,±10% 50/60Hz |
| | Power consumption | TBD |
| Security & Protection | Power Supply Protection | Leakage, over-load, over-voltage protection |
| | Lightning protection | With lightning protection |
| | Explosion protection of interface | Protection for while reverse connection of the power cause the short-circuit or burn out the device |
| Functions | OSD rotation | Yes |
| | USB play | Auto play |
| | Timing switcher | Yes |
| | Language | English, Japanese, French, Portuguese etc. |
| | Input singnal switching | Yes |
| Operation environment | Storage temperature | -20℃~50℃ |
| | Operation temperature | -20℃~95℃ |
| | Operation humidity | 5%~98% |
| Certificate | Including | CE, ROHS, FCC, CB, PSE, IK10 |
| Lifetime | Lifetime | 80000H |
| MTBF | MTBF | 60000H |