




NOTES:

1. GROOVE INTERIOR TO ACCEPT 1" DIA PIPE AND FIBERGLASS ROD.
2. HOT DIP GALVANIZE AFTER FABRICATION.
3. METAL CASTING TO BE APPROX. 3/16" THICK.
4. UNIT TO COME COMPLETE WITH (4) 1/2" X 2" GALV. HEX BOLTS, NUTS AND LOCK WASHERS.
5. MATERIAL; MALLEABLE IRON.

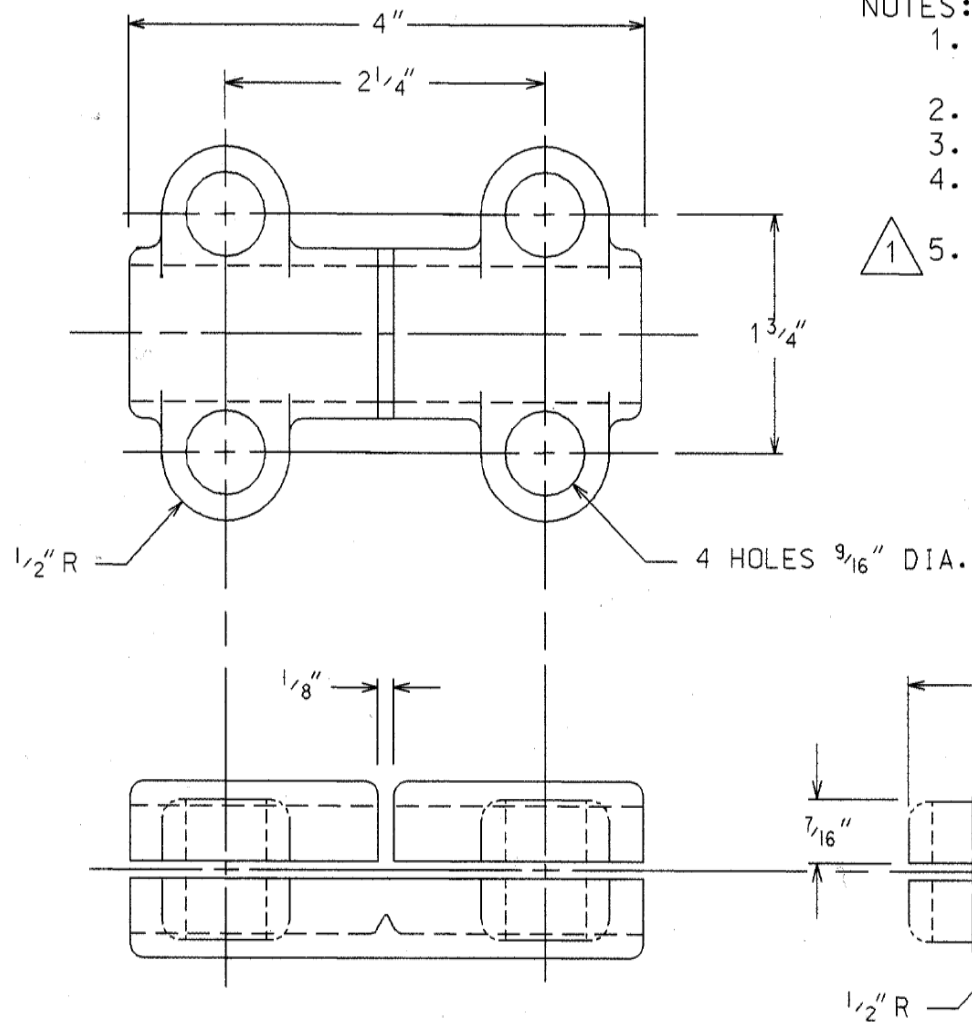

Mat'l	CAST IRON W/ HDG	UNIT	INCH	PROJECTION	DESCRIPTION OF DRAWING	CLAMP SPLIT CONTROL		
Q'ty		SCALE				ROD 1" 34.5KV SWITCH CONTROL		
APPROVAL						ACC-01-032		
REVIEW	2018/4/20			TOLERANCE	P/N			
DESIGN				>=2" ± 3%	DRAWING NUMBER	REV.	NC	
DRAWING				0.4" - 2" ± 4%	SIZE OF PAPER	SHEET	1/1	
				0.01" - 0.399" ± 10%				

