



*BUILDING
STRONGER
FUTURES*

PALCO

PRODUCT CATALOGUE 2025

Tel: 211 6609 | palco.mu



CONTACTS

PALCO

DIRECTOR OF COMPANIES

Jean-Paul Harel

Tel: (230) 5259 6850
Email: jpharel@palco.mu

**OFFICE**

Tel: (230) 211 6609
Email: reception@palco.mu

**Jonathan Lagesse
MANAGER**

Tel: (230) 5259 6858
Email: jlagesse@palco.mu

**Patrick Rousset
SALES MANAGER**

Tel: (230) 5259 6856
Email: prousset@palco.mu

SALES REPRESENTATIVES

Ramiad Pushkar

Tel: (230) 5256 7770
Email: rpushkar@palco.mu

Stephane Orange

Tel: (230) 5252 8651
Email: sorange@palco.mu

Ahmad Mittoo

Tel: (230) 5259 6859
Email: amittoo@palco.mu

Alexandre Pichee

Tel: 5250 6280
Email: apichee@palco.mu

Jean-Paul Melin

Tel: (230) 5251 0503
Email: jpmelin@palco.mu

Ritesh Seeparsad

Tel: (230) 5251 8834
Email: rseeparsad@palco.mu

**OFFICE**

Tel: (230) 211 6062

Hubert Harel

Tel: (230) 5259 6851
Email: hharel@palco.mu

Olivier Mayer (West)

Tel: (230) 5257 8450
Email: omayer@palco.mu

Joel Julienne (South & Centre)


Tel: (230) 5943 7522
Email: jjulienne@palco.mu

Guillaume Jollivet (North)

Tel: (230) 5254 7358
Email: gjollivet@palco.mu

Fabrice Tyack (East)

Tel: (230) 5259 6854
Email: ftyack@palco.mu

**TBA-MAURICE LTEE.**

Techniques des Bétons Allégés

Hubert Harel

Tel: (230) 5259 6851
Email: hharel@palco.mu

**OFFICE**

Tel: (230) 285 1314

Jean-François de Robillard

Tel: (230) 5259 6855
Email: jfderobillard@palco.mu

Bertrand Closel

Tel: (230) 5943 8549
Email: bclosel@palco.mu

**OFFICE**

Tel: (230) 286 1000

François Hardy

Tel: (230) 5259 9405
Email: francois@airstream.mu

Janot Belle

Tel: (230) 5259 9406
Email: janot@airstream.mu

Darryl Aubeeluck

Tel: (230) 5257 9407
Email: darryl@airstream.mu

Yannick Manuel (Contracting Dept)

Tel: (230) 5258-9408
Email: yannick@airstream.mu



CONTENT

PALCO TRADING

ADHESIVES	8 - 9
CONCRETE REPAIR	10 - 14
GARAGE PRODUCTS	15
TILING PRODUCTS	16 - 21
LADDERS	22
TAPES	23
SEALANTS	24 - 25
WATERPROOFING	26 - 29
GEOTEXTILE	30 - 31
DRAINAGE SYSTEM	32
LIME	33

PALCO WATERPROOFING

TORCH ON WATERPROOFING SYSTEM	36
WATERPROOFING SYSTEM	37
LIQUID WATERPROOFING SYSTEMS	38
ALTERNATIVE WATERPROOFING	39
SPECIAL PRODUCTS	40

TBA

BST - BETOSTYRENE	41
-------------------	----

PALCO FLOORING

BREATHECOAT	44
TERACOAT	44
POLISHED CONCRETE FLOORS	45
TERRAFLOOR	45
VUKA FLOORS	46
BOSTIK SELF LEVELLING	47

AIRSTREAM

EXTRACTORS / VENTILATIONS	50
OUTDOOR LIGHTS	51 - 54
INDOOR LIGHTS	54
CONNECTORS	55



WHAT WE DO

Palco Trading has grown to become a major supplier of high performance products to building, civil engineering, maintenance, manufacturing, builders merchant and hardware store industries.



ASSISTANCE & SERVICE

Palco Trading offers innovative solutions to solve construction issues. Our technical team supports clients on site for product selection. Maintaining quality, development, production and meet the relevant international standards.

We distribute our range throughout the island in all hardware shops and at our showroom at Allée des Manguiers, Les Pailles.



PRODUCTS

Tiles adhesive and grout, liquid waterproofing, waterproofing membranes, crack fillers, sealants, tapes, industrial adhesives, geotextiles membrane, water stop, concrete repairs products, concrete additives, release agents, industrial and domestic glues, lime...

OUR BRANDS



WOOD ADHESIVES



PEKAY WOOD GLUE 1302

High bond for all medium and soft wood. Quick setting time.

Available: 250 g / 500 g / 1 kg / 2.5 kg / 5 kg / 20 kg



PEKAY WD 279

(Water resistant)

Specifically designed to provide moisture resistant.

Available: 5 kg / 20 kg



PEKAY D 91 Vinyl Adhesive

Multi-purpose flooring adhesives with ultra quickgrip offers a soft glue line.

Available: 1 kg / 2.5 kg / 5 kg / 20 kg (coverage 4-5 m²/Lt)



PARQUET



PEKAY POLYURETHANE A663 (2-3 m²/ kg)

Specifically designed for the construction of insulated sandwich panels used in the cold-room and similar industries.

Available: 6 kg / 36 kg



PEKAY WOOD BLOCK W598 (1-2 m²/ Kg)

Water-based adhesive designed for the laying of a wide range of parquet and mosaic wood block flooring.

Available: 5 kg / 25 kg



GENERAL PURPOSE ADHESIVES



X'TRASEAL SUPER GLUE

A colorless, strong, easy to use adhesive that bonds well both porous and non porous materials. Use for bonding of glass, plastic, metal, leather, concrete, fabric, etc.

Available: 3 g x 12 Pcs
Single tube 20 mLs



FOOTWEAR



X'TRASEAL CONTACT ADHESIVE CA288

CA-288 Contact Adhesive is a multi purpose solvent based chloroprene contact adhesive that is easy to apply and offers extra bonding strength. Use for bonding and laminating formica, plywood, cloth, cardboard, sponge, wood, leather, rubber, glass, metal, concrete, ceramic, plastic and others.

Available: 100 mL / 200 mL / 750 mL / 3 kg
40gm Tubes Carded



X'TRASEAL CONTACT ADHESIVE C253

MC-253 Multi-Purpose Clear Adhesive is an ideal fast drying household adhesive. It is formulated for the adhesion and repairing of leather, fabric, glass, paper, cardboard, ceramic, metal, most plastic and etc.

Available: 20 mL



PVC ADHESIVE



X'TRASEAL PS-200 PVC SOLVENT

Clear color solvent based adhesive for pvc articles bonding applications. It is easy-to-apply, fast setting and extra strength formulation especially for waterproof bonding and coupling of rigid pvc, upvc, and cpvc pipes and fittings, cable conduits, gutters, etc.

Packaging size:
DIY Pack: 14gm x 12 Tubes Carded DIY
Pack: 50 gm
DIY Pack: 100 gm
Tube Boxed (60 pcs per carton)
Can: 100 gm Can
Can: 250 gm Can
Can: 500 gm Can



PAPER ADHESIVE



PEKAY POWDER PAPER AZ127

Available: 15 kg

PEKAY WD 3042

Carton Closing - General-purpose water based adhesive for bonding paper to paper and paper to board.

Available: 5 kg / 20 kg

PEKAY WD 3051

General Purpose - High adhesive strength for bonding paper and board offering flexibility and water resistance.

Available: 5 kg / 20 kg

PEKAY WD 272 PADDING COMPOUND

High quality water based padding adhesive for the bookbinding and printing industries.

Available: 5 kg / 20 kg



PEKAY PROFIDECO

Adhesive for paper to wall, wood, concrete, etc.

Available: 500 g / 1 kg / 5 kg



MATTRESS FOAM SPRAY ADHESIVE



PEKAY GB 684

High solids, synthetic elastomer-based adhesive formulated for the bonding of flexible urethane foam. Completely non-flammable.

Available: 5 kg / 20 kg / 50 kg / 200 kg



FOR SYNTHETIC GRASS



PEKAY A668 Synthetic Grass Adhesive

A688 is a two part polyurethane adhesive specifically designed for use in the synthetic grass industry for bonding grass carpet to seam joining tapes. It exhibits high green strength to help overcome surface movement during cure.

Available: 0.5 kg / 10 kg



GLUE GUN

GLUE STICK HM 73

General purpose translucent flexible hot melt in a stick form for use in glue guns.

Available: 1 kg (33 sticks)



HOTMELT

BOOK BINDING

ADHE AE-383 M WHITE CHIPS

Available: 25 kg



CARTON CLOSING

ADHE AE M12C YELLOW

Available: 25 kg

PRESSURE SENSITIVE

ADHE AR-901C PRESSURE SENSITIVE

Available: 24 kg

EDGE BINDING

PEKAY BAM 997

Available: 20 kg

NON SHRINK GROUT



CONMIX LTD
Building History

CONMIX NANO GROUT GP

NanoGrout GP is a general-purpose grout for use in all non-critical applications.

- Ready to use / Flowable and self levelling
- Able to fill intricate voids / Use for concrete repair work
- High strength / No bleeding or segregation
- Controlled expansion



Available: 25 kg

SELF LEVELING



BOSTIK C310

A fast setting high build modified cementitious levelling screed. Specially formulated for quick and easy application to achieve required falls without any shrinkage or cracking.



RHINOLITE PRIMER



GRIP A400

Grip A400 Concrete is a dispersion-based gypsum and cement plaster primer for exposed concrete surfaces and nonabsorbent surfaces that contains mineral fillings and enables the coat to be applied afterwards freezing without cracks and increase the capacity to adhere on the surfaces by balancing the absorbency of surfaces.



Available: 12 kg



PEKAY GRIP-ON

Primer for plaster such as Gypsum plaster

Available: 5 kg / 10 kg / 20 kg



FILLER

x'traseal®

X'TRASEAL PUTTY FILLER

Quick drying, ready mixed filler for dry wall, plaster, wood, etc.

Available: 500 g / 5.4 kg / 20 kg



PEKAY BETOFILL CRACKFILLER

Crack filler for walls and floors for both interior and exterior areas

Available: 500 g



JOINTS

SPX 33 WHITE JOINTEX

Jointex (33 kg/m³) is an expansion joint forming material with a hinged temporary blocking piece.

Available: 0.8 m x 2 m x 10 mm

- 1 m x 2 m x 8 mm
- 1 m x 2 m x 10 mm
- 1 m x 2 m x 12 mm
- 1 m x 2 m x 15 mm
- 1 m x 2 m x 20 mm
- 1 m x 2 m x 25 mm
- 1 m x 2 m x 30 mm



GROUT SEAL

Groutseal is made from an ether-based polyurethane foam. Tape used for prevention of grout loss through butt joints in formwork.

Available: 10 mm x 20 mm x 10 m



BACKING RODS

Backing Cord consists of polyethylene foam to be used as bond breaker material in joints to create the right joint dimensions for the sealant to be applied.

Available:

- 6 mm / 8 mm / 10 mm /
- 12 mm / 15 mm / 20 mm /
- 20 mm / 25 mm / 30 mm



FOAM FILLER



BOSTIK PU FOAM

For filling gaps between floors, walls, ceilings, doors and around pipe work, window and door frames.

Available: 750 mL



EPOXY GROUT



JAYCOSEAL M973 & M974

It may be used in expansion joints up to 75mm in size. The product is ideally suited for movement joints in building and civil engineering structures such as reservoirs, taxi-ways, concrete floors, pipelines, canals, swimming pools and other water retaining structures, basements and high rise buildings.

High duty coal tar sealant.
Highly resistant to fuel, oil and hydraulic fluid - low modulus.

Available: M974: 2 L / M973: 5 kg



JAYCOSEAL PRIMER G317

A solvent-based general purpose two-component primer of low viscosity suitable for use as a pre-treatment to concrete, steel, masonry, wood and other porous surfaces. Not suitable for glass, stainless steel, and polyolefin plastics.

Available: 500 g / 1 kg / 5 kg



ANCHOR GROUT



ALCOLIN POLYESTER CHEMICAL ANCHOR

is a polyester based, styrene free, high performance, rapid curing two-part chemical anchoring system. It is designed as a fast curing, high strength fixing anchor for medium to heavy-duty fixings. The product is extruded via the mixing nozzle with the use of a barrel applicator gun directly into the hole.

Available: 300 ml



EPOXY



X'TRASEAL FAST SET 4 MIN EPOXY CLEAR

A fast setting, non shrinking clear epoxy adhesive. This industrial strength product is excellent for bonding metal and for filling defects in metal, wood and masonry. Can be drilled, tapped, sanded, filed, etc.

Available: 25 mL



X'TRASEAL PUTTY STICK

A two part, fast curing epoxy putty. It is easy to use and useful for emergency repairs in industries, workshops, marine, automotive, construction and also for household use. Suitable for underwater repairs.

Available: 50 g / 100 g



WET TO DRY



JAYCOSEAL 201

Has been specially formulated to provide a structural bond between existing (cured) concrete and fresh (wet) concrete. It is a two component solvent free epoxy compound.

Available: 1.5 kg / 7.5 kg



GENERAL PURPOSE



JAYCOSEAL 272

Suitable for use as a general purpose adhesive for most materials or as a grouting medium for fixing steel rods, bolts, etc into concrete or stone.

Available: 500 g / 1 kg / 2 kg / 5 kg



MESH



FIBER MESH 60GMS

Fiber Mesh is made up of glass fibers to be used as sandwich media between two layers of liquid applied coatings and membranes. Open weave design promotes easier « wetting out » and optimum material consumption, Excellent resistance to water, alkali ageing, etc, Strengthens liquid applied membranes at critical points and Environment friendly.



CONMIX LTD
Building History

CONMIX FIBER 12MM - 0.6GMS

Conmix Fiber is a long chain polymer composed 100% by weight of propylene unit. It is available in two sizes, pre-packed and ready to use.



CURING COMPOUND



CONMIX LTD
Building History

CONMIX JETCURE RB

Resine based curing compound.

Available: 25 L / 200 L

CONMIX JETCURE WB

Water based curing compound.

Available: 5 L / 25 L / 200 L

CONMIX JETCURE WB 75

Wax emulsion based concrete curing compound.

Available: 5 L / 25 L / 200 L

CONMIX JETCURE GP WHITE

inorganic compound based curing compound particularly suitable for surfaces that will receive subsequent treatments such as renders or paints.

Available: 5 L / 25 L / 200 L



HARDENER



TAL X-TECH INTRAFLOOR S

Monolithic floor hardening compound.
Coverage: 3 to 5 kg/m²

Available: 25 kg



CEMENTITIOUS RENDERING



CONMIX LTD
Building History

CONMIX RECON PH

Polymer modified, cementitious thin fairing coat repair mortar for concrete surfaces, plaster surfaces, etc.

Available: 1 kg / 5 kg / 25 kg



CONMIX RECON HS - CONCRETE REPAIR

Non-shrink repair mortar containing fibres to provide high strength, fine, smooth repaired surfaces.

Available: 5 kg / 25 kg

CONMIX RECON GP

Rapid setting, high early strength dry pre mix concrete. It is a blend of special cements with non shrink properties.

Available: 25 kg

ADDITIVES



JAYCOCRETE STANDARD

Synthetic rubber latex for use with cement and cementitious mixtures.

Available: 1 L / 5 L / 25 L / 200 L



JAYCOCRETE SUPER

Use as a waterproof rendering on various surfaces and for screed and large patches.

Available: 1 L / 5 L / 25 L



PRIMERS



TAL FLOOR PRIMER

Latex based bonding agent and primer.

Available: 5 L / 25 L

TAL SF PRIMER

TAL SF PRIMER is a high penetration primer suitable for use with a wide range of epoxy coatings and floor systems.

Available: 5 L

TAL MT PRIMER

TAL MT PRIMER is a high penetration primer suitable for use with a wide range of epoxy coatings and floor systems on substrates that have a high moisture content. It can also be used as a stand alone sealer for green concrete.

Available: 5 L



Den Braven

DEN BRAVEN ZINC ALUMINIUM SPRAY

In spray anti-corrosion primer for steel reinforcement.

Available: 400 mL



SEALERS / COATINGS



X-SHIELD STAINBLOCK SEALER

X-Shield StainBlock Sealer is a water dispersed fluorosurfactant clear sealer used to provide a durable non film forming stain resistant barrier against oils and water on porous substrates such as concrete, brick, stone and unglazed tile and grout. The product can be used exterior or interior on floors and on walls.

Available: 1 L / 5 L / 20 L



CONMIX LTD
Building History

CONMIX RESIGARD SEALER

Water dispersed acrylic sealer. Used as sealer coat over natural stone, marble, granite, interlock blocks, masonry surface, etc.

Available: 1 L / 5 L / 20 L



SEALERS / COATINGS



CONMIX LTD
Building History

CONMIX MOYASHIELD WR

MoyaShield WR is a clear silane siloxane based water repellent sealer that penetrates into the substrate and provides water repellency by reacting with the substrate. It has a micro molecular structure that helps to achieve deep penetration inhibiting water ingress into the substrate. MoyaShield WR is used as a clear coat to protect concrete surfaces, stone cladding, coloured plasters, parking decks, bridges, decorative renders, tiles, tile grouts, etc.

Available: 5L / 20 L

ADMIXTURES



CONMIX LTD
Building History

CONMIX MEGA FLOW P4

High range water reducing and set retarding concrete admixture

Available: 5L / 20 L



COLOURS FOR CEMENT


COLOURS FOR CEMENT

Colours for Cement is lightfast, lime resistant and disperses easily into the dry mix. It will not affect the strength of the finished mixture, if used as directed.


- Permanent lightfast colours.
- Disperse easily in dry mix.
- Does not impair performance of mix.
- Ratio does not exceed 5%.

Coloured cements available in :


Available: 1 kg / 5 kg / 25 kg / 20 kg (for Yellow 960 & Yellow 920)




Yellow 920




Orange
Yellow 960




White 828




Red 130



Brown 660



Black 330



Green 4590

READY MIXED PLASTER



CREPI ADDMIX

Crepi ADDMIX is a mixture of chemical additives to be used with basaltic rocksand and Ordinary Portland Cement (CEM II) to produce quality rendering traditional mortars ready- to-use.

- Anti-Cracking Properties
- Improve Workability and Finishability
- Good Adhesion to Rendering Surface
- Increase Open Time



Available: 1 kg

READY MIXED PLASTER



2 in 1

2 in1 est un mortier de ragréage pour surfaces béton prêt à gâcher à base de ciment, adjuvants performanciers. Après gâchage, on obtient une pâte de ragréage de couleur grise. Le produit est applicable manuellement et mécaniquement.



Available: 20 Kg

READY MIXED PLASTER



PRIME KEY +

PRIME KEY + est un primaire d'accrochage de grade supérieure utilisé spécifiquement comme agent liant avec les mortiers de ragréage sur des surfaces en béton (plafonds, colonnes, poutre, banches) avec une maniabilité et adhérence plus qu'adéquate.



Available: 20 Kg



CREPIPLASTER

CREPIPLASTER est un mortier de regréage pour surfaces blocs et béton* à base de ciment et sable basaltique en intérieur et extérieur, selon la norme EN 998-1.



Available: 20 Kg



RENDERING COMPOUND

CREPIPLASTER est un mortier de regréage pour surfaces blocs et béton* à base de ciment et sable basaltique en intérieur et extérieur, selon la norme EN 998-1.



Available: 5 kg / 20 Kg

GARAGE PRODUCTS

x'traseal®

B1 PREMIUM MULTI-PURPOSE GREASE

B-1 Premium Multi-Purpose Grease is a high-purity, lithium-based grease that made from deeply refined mineral oil with rust and oxidation inhibitor that designed for the multipurpose in order counter corrosion.

Available: 2 kg / 10 kg



x'traseal®

DOT 3 BRAKE FLUID

DOT 3 HIGH MILEAGE BRAKE FLUID (RED) is formulated for peak performance motor vehicles. It has a wide boiling temperature range ensures maximum life and reliable braking power.

Available: 400 mL



x'traseal®

DOT 4 BRAKE FLUID

DOT 4 HIGH PERFORMANCE BRAKE FLUID is specially formulated for new technology motor vehicles. The superior additive helps to provide high boiling point protection and maintaining a stable viscosity over a wide temperature range. It will not create dangerous vapor under wet and dry boiling points.

Available: 400 mL



THREADLOCKER

x'traseal®

Threadlocker – RED

Threadlocker 9262 is designed for the sealing & locking of threaded fasteners. The product is a single component anaerobic, medium to high strength thixotropic, acrylic based thread locker. The product cures when confined in the absence of air between close fitting metal surfaces & prevents leakage & loosening from vibration & shock.

Available: 50 mL



x'traseal®

Threadlocker – BLUE

Threadlocker 9243 is designed for the sealing & locking of threaded fasteners which may require easy disassembly with standard hand tools. The product is a single component anaerobic, medium strength thixotropic, acrylic based threadlocker. The product cures when confined in the absence of air between close fitting metal surfaces & prevents leakage & loosening from vibration & shock.

Available: 50 mL



RELEASE AGENT

pekay

PEKAY MOULD OIL

Release agent for all types of formwork used in concrete construction where a high quality surface finish is important.

Available: 5 L / 25 L / 200 L



x'traseal®

X'TRASEAL B52

B52 Penetrating Oil is a fast acting penetrating lubricant for loosening of rusted parts, lubricating hard to reach areas, acts as a corrosion protector of all metals and also as a general lubricator for all types of equipments and tools.

Available: 200 mL / 400 mL



EDGING

Sure Strip

Straight Edge

The Straight Edge profiles provides a clean and straight finish to all tiling applications. It also provides a protective edge to floor and wall surfaces.

Available:
(SEA)Aluminium & (SES)Stainless steel
10 mm / 12 mm x 2.5 m

(SEB)brass 10 mm / 12 mm / 22.5 mm x 2.5 m



Sure Strip

Movement Joint

Movement Joints are designed to allow for the movement in the tile panels to prevent ceramic tiles from cracking or lifting

Available:
PVC CONTRUCTION JOINT(CJ) (Grey)
12 mm x 2.5 m
PVC MOVEMENT JOINT (MJ) (Grey)
12 mm x 2.5 m
HDA
8mm / 15mm and 17mm



Sure Strip

Formable Edge

It preserves the outlines of the shaped flooring designs. It offers a decorative and functional tile edge protection.

Available:
(FEA)Aluminium, (FES)Stainless steel
& (FEB) Brass
10 mm x 2.5 m
12 mm x 2.5 m



Sure Strip

Heavy Duty Movement Joint

Available
8 mm, 12 mm, 15 mm,
17mm x 2.5 m

Surestrip HDA MJ Grey
8 mm x 12.4 mm x 2.5 m
10 mm x 12.4 mm x 2.5 m
12 mm x 12.4 mm x 2.5 m
15 mm x 12.4 mm x 2.5 m
17 mm x 12.4 mm x 2.5 m



Sure Strip

45 Ramp

The 45 Ramp profiles are used specifically to transition between different floor covering heights as well as protecting the brittle exposed ceramic tile edges.

Available:
12mm x 2.5 m



Sure Strip

Retrofit

An everlasting elegant decorative look for tiled wall coverings.

Available:
LESN12A - 10 mm x 2.5 m



Sure Strip

Round Edge

The Round Edge profiles are an alternative to the Straight Edge profiles.

Available:
Aluminium, Stainless steel
10 mm x 2.5 m
12 mm x 2.5 m



Sure Strip

Cover Strip

The Cover Strip profiles are designed to cover gaps or edges in flooring installations.

Available: 40mm x 3m



Sure Strip

Square Edge

The Square Edge profiles are used to protect the vulnerable edges in all tiling environments.

Available:
(QEA)Aluminium, (QES)Stainless steel 316
10 mm x 2.5 m,
12 mm x 2.5 m,
15 mm x 2.5 m




Sure Strip

Tile In Step

Designed to be installed during the tiling process to protect and to extend the life of the ceramic tiles.

Available:
TSA (Tile in Step Aluminum)
10 mm x 2.5 m



Sure Strip

Retro alu corner: ANG 25

The Retro Corner Protector profiles are used to provide protection on external corners.

Available:
Aluminum
12.7 mm x 12.7 mm x 3 m
25 mm x 25 mm x 3 m



Sure Strip

Listello

Decorative look for tiled wall coverings.

Available:
LIS10 - 10 mm x 2.5 m
LIS12 - 12 mm x 2.5 m



Sure Strip

T Piece

T piece profiles are designed to cover gaps or edges in flooring installations.

Available: 40mm x 3m



MIGUA®

FV 35

Solid, but light aluminium brackets for quick installation in screed or tiled floorings

Available: 15 mm / 20mm / 25 mm /
35 mm / 50 mm




Sure Strip

Retro Fit Stair Nosing

The Retro Fit Stair Nosing profiles are used on tiled stairs to provide protection to vulnerable exposed ceramic edges.

Available:
Aluminum
21 mm x 21 mm x 2.5 m

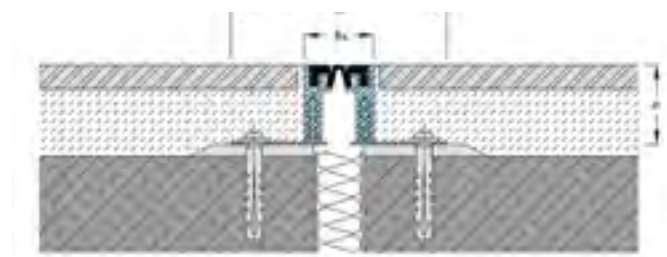

TILE ADHESIVES & GROUT



TAL STIX

A general purpose grey powder adhesive for fixing ceramic wall and floor tiles in interior and exterior installations.

Available: 20 kg



TAL PROFESSIONAL

A grey general-purpose standard-setting cement based powder adhesive for fixing ceramic tiles to walls and floors. The adhesive was designed for easy use, allowing up to 3 hours pot life after mixing.

Available: 20 kg



TAL PORCELAINFIX

A quick-setting, high-strength, grey cementitious adhesive for fixing porcelain tiles to walls and floors in interior and exterior installations. Also suitable for ceramic, quarry and terrazzo tiles.

Available: 20 kg



TAL PROFESSIONAL C2

A grey general-purpose standard-setting cement based powder adhesive for fixing ceramic tiles to walls and floors. The adhesive was designed for easy use, allowing up to 3 hours pot life after mixing.

Available: 20 kg



TAL GOLDSTAR 12

A quick-setting, high-strength, grey cementitious adhesive for fixing porcelain and dark-coloured granite, marble and natural stone tiles to walls and floors in interior and exterior installations. Goldstar 12 is also suitable for ceramic and terrazzo tiles.

Goldstar 12 sets after: 12 hours
Available: 20 kg



TILE ADHESIVES & GROUT



TAL GOLDSTAR XL

TAL GOLDSTAR XL tile adhesive is a grey quick-setting high-strength shrinkage-compensated cement-based adhesive for fixing large format ceramic, porcelain, dark-coloured natural stone tiles to walls and floors.

Available: 20 kg



TAL MARBLEFIX

A rapid-setting high-strength light-coloured cementitious adhesive for fixing white or light coloured marble, travertine, granite and natural stone tiles to walls and floors in interior and exterior installations.

Available: 5 kg / 20 kg Off White



TAL MOSAICFIX

A standard-setting "super-white" cementitious adhesive for fixing and grouting ceramic mosaics. Ideal for use in showers and around swimming pools when mixed with TAL BOND (replacing the water in the mix).

Available: 5 kg / 20 kg White



TAL FLEX

A flexible ready-to-use paste adhesive for fixing lightweight wall tiles where movement is expected, e.g partition walling, counter tops, etc.

Available: 1 kg / 5 kg



TAL WATER-BASE EPOXY

TAL Water-Based Epoxy Grout is a 2-Component, Water Based & Cleanable High-performance Epoxy-resin Grout with excellent chemical, acid and stain resistant properties, formulated specifically for ease of application and can be cleaned with cold water and offers excellent workability.

Available: 5 kg (Grey and White)



TILE ADHESIVES & GROUT



TAL WALL & FLOOR (14 colours)

Available in White, Ivory, Mushroom, Beige Bahamas, Beige, Calico Cream, Light Brown, Mid Brown, Dark Brown, Terracota, Dusty Pink, Pastel Blue, Light Grey, Dove Grey, Dark Grey, Black, White, Grey. Joints up to 8mm.

Available: 1 kg / 2 kg / 5 kg / 20 kg



PRIMER



TAL KEYCOAT

A modified latex-based primer to improve adhesion to smooth, dense surfaces as well as very porous surfaces.

Available: 1 L / 5 L / 25 L / 200 L



ADDITIVES



TAL BOND

Liquid latex-based additive for cementitious powder adhesives and grout and is used to improve water resistance as well as bond strength and flexibility of the product when used as a total water replacement in cementitious adhesive and grout mixes.

Available: 1 L / 5 L / 25 L / 200 L



TAL BOND POWDER

TAL BOND POWDER is a white-coloured special blend of dry-form polymer-based powder additives designed to enhance bond strength, flexibility, water resistance and reduced/elevated temperature resistance of cement based tile adhesives and grout.

Available: 1 kg



CLEANER



PEKAY BRITE TILE

a special blend of mild chemicals and detergents, designed to clean and shine ceramic, porcelain, granite, quarry and terracotta tiles and vinyl resilient flooring. It will also rejuvenate grout and remove calcerous deposits, unmodified cementitious deposits, grease and soap residues.

Available: 1 L / 5 L



TAL GOLDSTAR DAILY TILE CLEANER

TAL Goldstar Daily Tile Cleaner is a gentle, water-based cleaner formulated to remove dirt and grime from wall and floor tiles, leaving surfaces streak-free and lemon-fresh. Ideal for daily maintenance, it is suitable for all tiled surfaces, including granite, porcelain, quarry, terracotta, and natural stone tiles, as well as kitchen countertops. The versatile formula can even be used on glass, mirrors, and vehicle surfaces when diluted.

Available in 1L & 5L



TAL GOLDSTAR HEAVY DUTY TILE CLEANER

TAL Goldstar Heavy Duty Tile Cleaner is a concentrated, high-alkaline cleaner and degreaser designed for tackling stubborn dirt, grease, grime, and soap scum. It is perfect for deep-cleaning commercial and industrial floors, including kitchens, garages, and workshops, and is safe for most hard surfaces, including granite, porcelain, and natural stone tiles. For optimal results, dilute with water as needed.

Available in 1 L and 5 L



CLEANER



TAL GOLDSTAR MOULD BLAST

TAL Goldstar Grout Residue Remover is a specialised cleaner formulated with a blend of acids and detergents to effectively remove unmodified cementitious grout and mortar residues from both porous and non-porous surfaces. It is the ideal choice for post-installation cleaning, ensuring a flawless finish for tiling projects. Note: Not suitable for modified grout or mortar residues.

Available in 1 L / 5 L



TAL GOLDSTAR MOULD BLAST

TAL Goldstar Mould Blast is a powerful cleaner containing fungicides and mild detergents, designed to remove and prevent mould growth in humid and damp areas. Perfect for bathrooms, kitchens, and other mould-prone spaces, this product works in a single application to kill mould spores and prevent regrowth.

Available in: 500 ml trigger spray bottle.



SEALER



TAL GOLDSTAR NATURAL STONE SEALER (Satin & Matt)

TAL Goldstar Natural Stone Sealer is a solvent-based acrylic sealer that penetrates and bonds with natural stone tiles, creating a hard-wearing, non-yellowing, that enhances the natural beauty of stone tiles. Designed for both interior and exterior applications, it protects against stains and wear while bringing out the rich tones of marble, granite, and other natural stones.

Available: 1 L tins. (Satin & Matt)



SEALER



TAL GOLDSTAR GROUT SEALER

TAL Goldstar Grout Sealer is a clear, non-discolouring sealer formulated to protect cementitious grout joints from stains, dirt, and everyday wear. Ideal for both interior and exterior applications, it is also suitable for small-area natural stone sealing projects. Apply this durable sealer to enhance and extend the life of your grout.

Available: 1 L



TOOLS & ACCESSORIES

ADHESIVE TROWEL 6MM



GROUT FLOAT



GROUT RAKE



GROUTING SPONGE



RUBBER HAMMER





PLASTIC TILE SPACERS

Plastic spacers for wall & floor tiles

- Ensure constant joint width
- Ensure a professional finish
- Quick and easy to use

Available:

2mm x 300 units / 3mm x 210 units / 4mm x 200 units / 5mm x 200 units / 6mm x 200 units / 8mm x 200 units




REUSABLE SELF LEVELING WEDGES

For tile thickness are between 8~13 mm,
Suitable for tile gap >1.6 mm
System speeds up the process of tile settings and is very easy to use with any skill level.

- Accurate tile setting requires perfect levelling of the tiles.
- Perfectly level during the installation, after the thin set or adhesive cures.
- They often show a variance in height and can compromise the aesthetics.
- You can quickly achieve a smooth level surface using the new system.

How to use:

- Pressing Wedges and Clips, until two tiles are at same level
- 24h later, kicking the straps with foot or with a rubber hammer

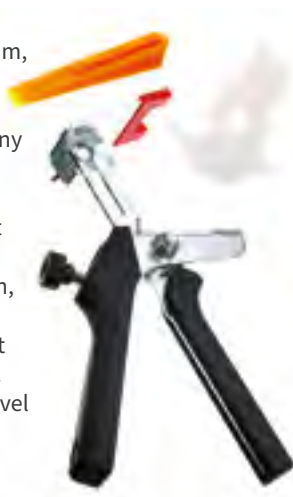

SELF LEVELING CLIPS


Self levelling clip
(Pack of 100):

0.5 mm / 1 mm / 2 mm /
2.5 mm / 3 mm



REUSABLE SELF LEVELING WEDGES

Packaging: 50 units



SELF LEVELING TOOL



Tile Leveling System

- Very easy to use.
- Great for use with all type of tiles.
- Ensure a professional finish
- Speeds up installation.

Available:

1.5mm x 50 units

1.5mm x 45 units



REC SPACERS (CALLE FOURCHETTES)

Easy to use and ensures a professional finish

Available:

02mm x 40mm Green / 03mm x 40mm Red / 05mm x 40mm Blue / 02mm x 80mm Yellow
03mm x 80mm Green / 05mm x 80mm Black



WINDOWS SPACERS

Easy to use and ensures a professional finish

Available:

10mm x 100 units



BOUCHONS

White & Black Rubber caps

Available: 12mm (1000 Units)



CLAPETS

White & Black

Available: 1000 units/pack



LADDER



ECO PLUS - STEP LADDER



3,62 m
MAX

3 / 4 / 5 / 6 / 7 steps



TRIPLE TRANSFORMABLE



10,56 m
MAX

Ladder 3 x 7"
Ladder 3 x 8"
Ladder 3 x 9"
Ladder 3 x 10"
Ladder 3 x 12"



SIMPLE LADDER

Ladder 14"
Ladder 16"
Ladder 18"
Ladder 20"



7,50 m
MAX



TRIPLE LADDER



18,73 m
MAX

Ladder 3 x 10"
Ladder 3 x 12"
Ladder 3 x 14"
Ladder 3 x 16"
Ladder 3 x 18"



DOUBLE LADDER

Ladder 2 x 16"



12,55 m
MAX



PACKING



PACKING TAPE

Available:

12 mm x 40 m x 50 mic (Clear)
24 mm x 40 m x 40 mic (Clear)
48 mm x 100 m x 40 mic (Brown/Clear)
72 mm x 100 m x 40 mic (Brown/Clear)



ALUMINUM TAPE

Available:

48 mm x 50 m



MASKING TAPE



GENERAL PURPOSE

General purpose
masking tape (+60°C)

Available:

12 mm / 18 mm / 24 mm / 36 mm /
48 mm x 40 m



HIGH TEMPERATURE

General purpose masking tape (+80°C)

Available:

12 mm / 18 mm / 24 mm / 36 mm /
48 mm / 72 mm x 40 m



TISSUE TAPE

Available:

6mm / 12mm / 18mm / 24mm / 36mm /
48mm / 72mm x 10m and 50m



DOUBLE SIDED TAPE



FOAM TAPE

Available:

Black: 15 m / White: 20 m
12 mm / 18 mm / 24 mm



SPECIAL TAPE

- Cloth Duct Tape Black (48 mm x 25 m)
- Ptf Thread Seal Tape (12 mm x 10 m)
- Stretch Film (450 mm x 400 m x 17 Mic)



FLOOR MARKING

Available:

48 mm x 30 m



PVC PROTECTIVE IN SPECIAL TAPE

- Coated cloth as backing with rubber resin adhesive coated.
- It has high tensile strength, excellent moisture resistance, easy tear.
- It conforms well to irregular surfaces.
- It is a good choice for bundling, heavy carton packing.

Available:

black, green, red, blue, yellow and white.
18 mm x 20 m



TAPE DISPENSER

Glazing Tape



ADHESIVES

x'traseal®

X'TRASEAL X BOND

To bond to a wide variety of construction materials including pvc, wood, gypsum board, concrete, masonry, aluminium, galvornised iron, steel, fibrous cement sheet and floor paneling. Xbond is also safe to use on foamed polystyrene and mirror backed tiles.

Available: 310 mL / 85 g



ACRYLIC

x'traseal®

X'TRASEAL MC-800 X'TRASEAL MC-808

Excellent adhesion to wood, concrete, marble, plasterboard, brick, cement sheet and ceramic tiles.

Available: 480 g
MC-800: (White) | MC-808: (Black / Grey / White / Teak / Brown)



DEN BRAVEN BLACK GLAZING SILICONE STRUCTURAL SEALANT

High-strength structural sealant with primerless adhesion to many building substrates • Specific substrate testing required on all structurally glazed projects • UV, weather and ozone resistant • Almost odourless • Average tooling time • Non-corrosive cure by-product

Available: 600 mL



DEN BRAVEN HIGH TACK H785

High quality professional hybrid adhesive with an extremely high initial tack.

Direct tack, no support required, Suitable for BREEAM applications, High strength, No isocyanates, solvents and silicones, Permanently elastic, Resistant to moisture and weather influences and Adheres perfectly without primer on most, even damp, surfaces

Available: 310 mL White



HYBRIFIX 611

Can be used for joint interior and exterior floor expansion joints and elastic bonding. Metal and mechanical construction and body work, ship building and container, refrigerating plants automotive, caravan, mobile home, aircraft and railway industry.

Available: 300 mL (White / Black)



BOSTIK UNIVERSAL ACRYLIC

Bostik UNIVERSAL ACRYLIC is a versatile sealant based on acrylic dispersion. After application the product forms a soft plastic to elastic rubber by evaporation of water from the sealant.

- Paintable with water based and synthetic paints
- Perfect adhesion without use of a primer on most, even slightly damp substrates
- Versatile economic acrylic sealant
- Almost odourless
- Easy to apply and clean

Available: 500 g (White)



POLYURETHANE



DEN BRAVEN POLYFLEX 452 HM

Can be used for joint interior and exterior floor expansion joints and elastic bonding. Metal and mechanical construction and body work, ship building and container, refrigerating plants automotive, caravan, mobile home, aircraft and railway industry.

Available: 300 mL (White / Black)



TAL GOLDSTAR SEALMASTER 1000

TAL GOLDSTAR SEALMASTER 1000 is a single component permanently flexible moisture curing polyurethane based adhesive and joint sealant. It exhibits excellent properties for adhesion between most substrates and materials, including materials with dissimilar coefficients of expansion. It is fast curing and is resistant to shock, vibration and temperature change when cured.

Available: 600 mL (Grey)



HYBRID



DEN BRAVEN HYBRIFLEX 540

One component moisture curing, low-modulus sealant and adhesive. Highly resistance to ageing and weathering.

Available: 400 / 300 mL (White/Grey/Black)



DEN BRAVEN HYBRISEAL 500

Hybriseal® 500 is a high quality professional universal high modulus sealant and adhesive based on hybrid technology which cures under influence of humidity to form a durable elastic rubber.

Available: 300 mL (White/Grey/Black)



DEN BRAVEN CRYSTALFLEX

Crystalflex is a crystal clear sealant designed for invisible jointing and adhesion when clear bonding aesthetics are of the utmost importance. Hybrid based sealant, which is low-odour, free of solvents and silicones

Available: 300 mL (clear)



SILICONE



X'TRASEAL SA 103

Multi purpose acetoxysilicone sealant.

Available: 260 g (Clear/White/Grey/Bronze/Black)



X'TRASEAL GLASS SEALANT

Glass Sealant is a 100% acetoxysilicone sealant that offers excellent adhesion, weatherability and elasticity. Most suitable for gluing aquarium and for general glazing and sealing applications.

Available: 85 g (Clear/White)



BOSTIK AQUARIUM

Is a polysiloxane bases, acetic silicone for glass and aquarium production

Available: 310 mL



BITUMINOUS

EVO-STIK

EVO-STIK Roof & Gutter Sealant is a gun applied, rubberised, oil-based sealant intended for sealing joints in gutters, roofing sheets, and other similar applications. The sealant is semi-drying and remains predominantly in a soft paste like condition, this ensures excellent adhesion to most surfaces.

Intended for external weather sealing and because of its non-drying nature, is ideally suited for lap joints where it will maintain a weatherproof seal, even in very thin sections when applied between two non-porous sheet materials, which are mechanically fixed together.

Available: 280 mL



X'TRASEAL PU-551 Auto Glass Sealant

PU-551 Auto Glass Sealant is a one part, high viscosity moisture cure polyurethane based sealant. It changes from pastry form to elastomeric form when exposed to moisture. It offers excellent adhesion on glass and metal. Most suitable for bonding windshield in the automotive industry.

Available: 310 mL (Black)



HIGH TEMPERATURE



X'TRASEAL RTV RED 650F

Developed for the hot running car's engine. Ideal for timing covers, valve covers, oil pans, intake manifolds, exhaust manifolds and water pumps.

Available: 85 g (Red/Grey)



GUN



X'TRASEAL SILICONE GUN

Available: 400 and 600 mL



X'TRASEAL CAULKING GUN

Silicone gun.

Available: 310 mL



CEMENTITIOUS WATERPROOFING



TAL SUREPROOF SHOWER

A tough, flexible, and seamless fibre enriched quick-setting cementitious slurry-applied waterproofing membrane specifically designed for the DIY market for waterproofing of showers and bath surround walls in residential applications. The fibre content provides enhanced crack-bridging properties and flexibility. It is fully compatible with cement-based tile adhesives and can be tiled directly onto without the need for primers.

Available: 5 kg

Coverage: 3 m² per 5 kg Bucket at 1.5 - 2.0 mm thick cured film



TAL SUREPROOF

TAL SUREPROOF, a tough, flexible and seamless rapid-drying two-part liquid-applied waterproofing membrane, suitable for waterproofing shower recesses, internal wet areas, external decks & swimming pools.

Available: 20 kg (Including Primer)

Coverage: 12 – 15 m² per 20 kg kit at 1.2 mm thick cured film



PEKAY ELAST-O-CRETE

Highly elastic cementitious waterproofing membrane providing long term durability. Under tile waterproofing, bathrooms, balconies, corrosion protection for beams, fish ponds & reservoirs.

Available: 5 kg / 15 kg

Coverage: 1.5 – 2 Kg/m²/mm film thickness



CON MIX LTD
Building History

CON MIX MOYAPROOF WS2

Suitable for many waterproofing applications, such as swimming pools, balconies, bathrooms, wet areas, basements, roof waterproofing system in damp conditions where other systems cannot be used, lift pits, etc. Provides excellent adhesion, flexibility, and durability.

Available: 5 kg / 25 kg

Coverage: 6 m² / Set @ 2 mm thickness in two coats



BLOCK C550 BOSCOFLEX

Two-component polymer-modified flexible cementitious waterproofing coating with easy application and strong adhesion to concrete and cement render.

Coverage:

Bathrooms, Balconies, Ground Moisture:

2 layers at 1.0 kg/m² per layer (total 2 kg/m²)

Water Tanks, Swimming Pools, Hydrostatic Areas: 3 layers at 1.0 kg/m² per layer (total 3 kg/m²)

Available in 30 kg (Kit)



BLOCK C750 BOSCOLASTIC

High-performance two-component acrylic cementitious waterproofing coating for on. Provides superior waterproofing with excellent adhesion and weather resistance.

Coverage:

Bathrooms, Balconies:

2 layers at 1.0 kg/m² per layer (total 2 kg/m²)

Water Tanks, Swimming Pools, Hydrostatic Areas: 3 layers at 1.0 kg/m² per layer (total 3 kg/m²)

Available in 35kg (Kit)



CON MIX LTD
Building History

CON MIX MOYAPROOF PLUG

To stop pressure and seepage leaks through joints / cracks in concrete, rocks, culverts, basements, tunnels, dams, pools, subways, etc.

Available: 5 kg / 25 kg



XYPEX ADMIX C1000 NF

Special chemical treatment for waterproofing, protection and improvement of concrete. Recommended for reservoirs, foundations, swimming pools, etc.

Available: 3.4 kg



XYPEX CONCENTRATE

Applied as a cementitious slurry to the surface of existing above-or-below-grade structures to waterproof and protect the concrete against high hydrostatic pressure.

Available: 5 kg / 25 kg

CEMENTITIOUS WATERPROOFING



XYPEX MODIFIED

Can be applied as a single coat for the damp-proofing of exterior foundation walls.

Available: 25 kg



XYPEX PATCH N PLUG

Specially designed, fast-setting, non-shrink, high-bond-strength, hydraulic cement compound for concrete patching and repair.

Available: 25 kg

ACRYLIC



Boscoseal BLOCK A550 (RC2)

Boscoseal RC2 est un acrylique mono-composant flexible
Revêtement d'étanchéité qui durcit en un élastique résistant
film d'étanchéité.

Available: 5 kg / 20 kg



BLOCK A750 BOSCOSEAL AC2

Block A750 Boscoseal AC2 is a one part water based acrylic polymer fibre reinforced waterproofing membrane specially formulated for commercial and residential external waterproofing application and does not require the use of additional reinforcing matting.

Available: 5 kg / 20 kg



PEKAY ACRYLSEAL 835

Acrylic emulsion waterproofing membrane providing excellent durability & flexibility. Resists mould and fungal growth.
For exterior walls.

• Saffbond membrane also available.

Available: 5 kg / 20 kg
Coverage: 1,5 to 2 m² per litre



ACRYLIC



FLEXI-SEAL 833 (FIBRATED)

Acrylic emulsion waterproofing membrane with fiber, providing excellent durability & flexibility. Resists mould and fungal growth.
For exterior walls.

Available: 2.5 kg / 5 kg / 20 kg
Coverage: 1,5 to 2 m² per litre



PRIMER



G 223 PRIMER

G223 primer is a solvent-based clear sealer with alkali-resisting properties, specifically designed as a primer to be used with the F835 Acryl-Seal and Q147 roof coating systems, and as a UV resistant sealer for brick, concrete and stone.

Available: 5 kg / 25 kg

MEMBRANES



PEKAY SAFBOND

Supporting membrane to be used with Rubberseal 570 / Acryseal 835 for large roof, wall cracks.

Available: 100 mm x 20 m
150 mm x 20 m
1 m² / 2 m²



PEKAY VYLENE

Supporting membrane to be used with Rubberseal 570 / Acryseal 835 for large roof, wall cracks.

Available: Meter square

PU WATERPROOFING



BOSTIK AQUABLOCKER

Bostik Aquablocker combines the reliable crack-bridging and waterproofing performance of a traditional, thick-layer bitumen-based coating with the unbeatable ease of handling and application of a bitumen emulsion.

Available: 1 kg



Boscoseal PU

Block PU est un liquide élastomère appliqué Hybride PU styrène acrylique dispersion à base de revêtement imperméable Formulé pour donner une longue durée, sans entretien et supérieur. Protection de revêtement d'étanchéité pour les substrats en béton. Économique et écologique, complètement exempt de goudron, de bitume et d'autres substances dangereuses.

Available: 5 kg / 20 kg (White and Grey)



BITUMINOUS WATERPROOFING



PEKAY RUBBERSEAL 570

A rubber-latex bitumen emulsion, waterproof, black-coating. For walls, roofs and dams.

- Safbond membrane also available.

Available: 2.5 L / 5 L / 20 L
Coverage: 1,5 to 2 m² per litre



PEKAY ROOF DRIP 501

Cold-curing mastic modified with inert fillers to provide a flexible waterproof seal between a wide variety of bituminous materials. It retains its flexibility for a long period of time and is resistant to chemical attack and external exposure.

Available:
1 kg / 2 kg / 5 kg / 20 kg



BITUMINOUS WATERPROOFING

FLASH BAND

Lacquer, foil, membrane and bitumen adhesive. Instant waterproof seal, even in damp conditions. Long lasting protection.

Available: 4 inch (100 mm x 10 m)
6 inch (150 mm x 10 m)
8 inch (200 mm x 10 m)
12 inch (300 mm x 10 m)
24 inch (600 mm x 10 m)



WATERPROOFING MEMBRANE



SBS /APP MEMBRANE

- Bituflex F 1.7mm E/E (1 m x 15 m)
- Bitunil P 4.5 kg - White / Grey
- Bituflex F 4.5 kg - White / Grey
- Bitugum F 3.25 kg - White / Grey
- Bituflex P 4.5 kg - White / Grey
- Bituflex F 4 kg - White / Grey

Available: 1 m x 10 m



BITUMEN PRIMER

Bitumen primer is suitable for sealing and priming porous and non-porous surfaces. Used on concrete, metal and timber surfaces.

Economical & easy to apply.



HOT MELT OXIDIZED BITUMEN 115/15

Oxidized bitumen exhibits "solid" characteristics at ambient temperatures and provides superior adhesion.

TORCH



WATERSTOP PVC TYPE A

DUMBELL

For use in expansion joints in the centre of the section (such as walls).

Available: 150 mm x 15 m roll
200 mm x 15 m roll
250 mm x 15 m roll
TYPE A 250 mm
TYPE B / C / D 200 and 250 mm



REARGUARD TYPE B

REARGUARD WITH CENTER

For use in expansion joints at the rear of the section in slabs and walls.

Available: 250 mm x 15 m roll



HYDROPHYLIC WATERSTOP TYPE C



MANORTEQ
Completing the Waterproofing

MANORTEQ FORMRING

FormRing is an external watertight sealing ring for formwork spacers/tie bolt sleeves, designed and developed to seal spacers against penetrating water that infiltrates on the outside of the spacer/sleeve.



MANORTEQ
Completing the Waterproofing

MANORTEQ - HYDROBAR EVO WATERBARS

HydroBar Evo waterbars are a new, revolutionary alternative to the original bentonite solution giving increased expansion capacity, over the traditional systems

Available: 5 mm x 10 m



HYDROPHYLIC WATERSTOP



MANORTEQ
Completing the Waterproofing

MANORTEQ - FORMPLUG

FormPlug is used for the watertight sealing of hollow formwork spacers. FormPlug is simple to install. There is no finishing required.

- It ensures hydrostatic head resistance and waterproof sealing of tie bolt spacers, whether made of PVC or steel.
- 100% waterproof
- Pressure resistant up to 6 Bar



HYDROPHYLIC WATERSTOP

Swellable waterstops developed for use in construction joints.



TAL STOP HWS 520: 5 mm x 200 mm x 10 m roll

TAL STOP HWS 1020: 10 mm x 200 mm x 10 m roll

TOOLS & ACCESSORIES

BLADE



GEOTEXTILE

SUNSHADE



50% Green 1m83 x 30 mts (120gms/m²)
90% Green 1m83 x 30 mts (150gms/ m²)

RESERVOIR MEMBRANE

Black PVC Membrane 1m80 x 50mts
or on custom size with welding



Available:
GSE HDPE 1.5 mm SMOOTH

BLACK PE PLASTIC MEMBRANE

Builders Film Black HIGH IMPACT grade. Used for construction work, is waterproof and ideal plastic for under concrete slab pour as well as the demolition and asbestos removal industry. This tough film comes in a handy roll and can be used to line water features, protect structures from weather and much more. Tough, waterproof film. Ideal for construction purposes.



Available:
Roll 230 micron x 2 mts (40 kgs/ Roll, 100 mts/ Roll)

MACCAFERRI
AFRICA

GROW BAG

Planting bags

Available: 25 L / 50 L / 75 L / 100 L



GABION

Galvanized PVC coating.

Available sizes:
2 m x 0.5 m x 0.5 m
2 m x 1 m x 0.3 m
2 m x 1 m x 1 m
3 m x 1 m x 0.3 m
3 m x 2 m x 0.3 m



Fibertex
GEOTEXTILES

GEOTEXTILE BAG (SAND BAG)

The main applications are:

- Flood control and protection
- Reinforcing existing dikes/shoreline structures
- Erosion control



Available:
400 kg (1.3 m x 80 cm) 30S
1800 KG (1.8M X 1.5M) 75S

GEOTEXTILE MEMBRANE


Available sizes: 1.7 m & 5.2 m X 150 m



Applications	Fibertex Geotextiles								Function			
 <i>The colour of the markings indicates higher requirements to mechanical properties when moving from light blue to darker blue.</i>	F-20	F-22	F-25	F-30	F-32	F-34	F-46	F-55	Separation	Filtration	Drainage	Protection
ROAD WORKS												
Permanent roads									•	•		
Temporary roads									•	•		
Road widening									•	•		
Parking areas									•	•		
Path and walking areas									•	•		
Airports									•	•		
CONSTRUCTION WORKS												
Foundations									•	•		
Concrete floors									•	•		
Roof Constructions									•	•		
Roof Constructions (protection)											•	•
Retaining walls									•	•		
GROUND SYSTEMS												
Pipes and trenches									•	•		•
Sport grounds									•	•		
Slopes (Erosion control)									•	•	•	•
DRAINS												
Drainage pipes									•	•		
Drainage trenches - fascines									•	•		
Surface drains									•	•		
Building drains									•	•		




FILTRATION



DRAINAGE



PROTECTION





The fully integrated rainwater drainage system for around the home and light

Exterior Patios / Swimming pool areas / Paved terraces / Walkways / Driveways

Channel & Grate

1.0m Channel and Grate. UV resistant, easy to install. 1m lengths clip together to extend to your desired length.



Rainwater Pit

Designed as a drainage collection point by itself or connected to Waterform system



Corner & T-piece with Grate

90 Degree corner connection.



Converter

Connects various components. Converter connects the cut end to the next piece.



Flow-Way Gullytop

90 Degree corner connection.



End Cap

Seals the end of the line. Cut out center piece and connect pipe end.





GLUEX

Interior and exterior lime wash coating for houses, outbuildings, boundary walls, etc.

Available: 25 kg (covering 70 m²)



CLC

CLC lime is a binder with excellent breathable properties, highly recommended for old/heritage building restoration. CLC lime-based plaster and mortars guarantee long-lasting durability and damp-free renovation.

- Cost savings - Fewer repairs, less maintenance and faster application.
- Superior quality - Adapts to all climates.
- Lasting durability.
- Great workability - Enhanced durability and fills the voids and cracks.

Available: 25 kg



BIOLIM

Hygienic and eco-friendly product that creates a stable alkali environment inhibiting bacterial growth, improving biosecurity, reducing odours and preventing the spread of contagious disease:

- Reduces hoof infection
- Improves hygiene in pens
- Improves biosecurity
- pH control

Available: 25 kg



SOIL STABILISATION LIME

Hydrated Lime for soil stabilisation.

- Soil stabilisation
- Soil PI breakdown
- Increase in strength and durability
- Typically mix 3% to 6% lime of soil content, depending on soil type

Available: 25 kg



“QUALITY, EXPERIENCE & TRUST.”





Who We Are

At Palco Waterproofing, we've been protecting buildings in Mauritius for over 30 years. As a family-run company, we combine experience, reliability, and innovation to deliver solutions you can trust.

What We Do

We provide high-quality waterproofing systems that keep your projects safe from leaks and long-term damage. From liquid membranes to advanced roofing and coating solutions, we work hand-in-hand with contractors, architects, and property owners to ensure every structure stays durable and watertight.



With over 30 years of experience, Palco Waterproofing applies Paradiat S membrane with a 10-year warranty.

OUR BRANDS





BITUMEN PRIMER

Bitumen primer is suitable for sealing and priming porous and non-porous surfaces. Used on concrete, metal and timber surfaces.

Economical & easy to apply.



Palco Waterproofing
Bituminous primer on concrete



HOT MELT OXIDIZED BITUMEN 115/15

Oxidized bitumen exhibits “solid” characteristics at ambient temperatures and provides superior adhesion.



Palco Waterproofing
Hot Melt Oxidised Bitumen



1 LAYER / 2 LAYERS SBS MEMBRANE

Fibreglass and Polyester reinforced membrane with mineral or aluminium finish.



Palco Waterproofing
SBS vs APP Bitumen

TORCH ON WATERPROOFING SYSTEM



WATERPROOFING SYSTEM FOR ROAD, BRIDGE DECKS & CAR PARKS

Fully bonded elastomeric bitumen single layer system for direct application of the overlaid weaving coarse



REFLECTIVE MEMBRANES

Available in white, aluminium.

- Powder coated finish.
- Solar reflective index 71
- High U.V reflective
- Long durability



Palco Waterproofing
Palco test temperature moyenne

GREEN ROOF WATERPROOFING SYSTEM

A green roof or living roof is a roof of a building that is partially or completely covered with vegetation and a growing medium, planted over a waterproofing membrane. It may also include additional layers such as a root barrier and drainage and irrigation systems.



TORCH ON WATERPROOFING SYSTEM

DECORATIVE BITUMINOUS SHINGLES

SBS bitumen shingle for roofing.

- High quality product, SBS bitumen.
- With self-adhesive points for bonding.
- Weathertightness.
- Easy installation.
- Large range of colours and models



WATERPROOFING SYSTEM FOR BASEMENT

Waterproofing barrier against water infiltration subject to high movements.

Used in foundations and underground structures with delicate site conditions.

LIQUID WATERPROOFING SYSTEMS

LIQUID WATERPROOFING SYSTEMS POLYURETHANE LIQUID MEMBRANE

A single-component liquid waterproofing product that, after polymerization, forms an elastomeric, cold-applied polyurethane membrane. The membrane cures into a continuous, fully adhered layer. This waterproofing system ensures complete water tightness and accommodates building movements.



CEMENTITIOUS WATERPROOFING

Is a high flexible and seamless, rapid settings two component slurry applied waterproofing membrane.

It is suitable for:

- Waterproofing showers recessed.
- Internal wet areas
- External deck and under tiles
- Swimming pool
- Water tanks
- and protected roof tops.



ALTERNATIVE WATERPROOFING



GEOMEMBRANE FOR PONDS

- Good physical and mechanic performance.
- High tearing resistance, strong deformation adaptability.
- Puncture-resisting, aging resisting, ultra-violet radiation, oil and salt, and corrosion resistance.
- Good adaptability to high and low temperature, non-toxicity, long service life.
- Good waterproof, drainage, anti-seepage and damp proof effects.



Palco Waterproofing
Alternative Waterproofing

THORMA-JOINT - Flexible expansion joint between the adjacent road and the bridge deck

BRIDGE DECK JOINT

System of flexible waterproof bridge joint, which will allow for a joint movement in compression and decompression.



Palco Waterproofing
Thorma Joints




THERMAL INSULATION SYSTEM

Application of thermal insulation boards under the waterproofing system.



SPECIAL PRODUCTS

RESIDENTIAL AND COMMERCIAL PAINTING WORKS

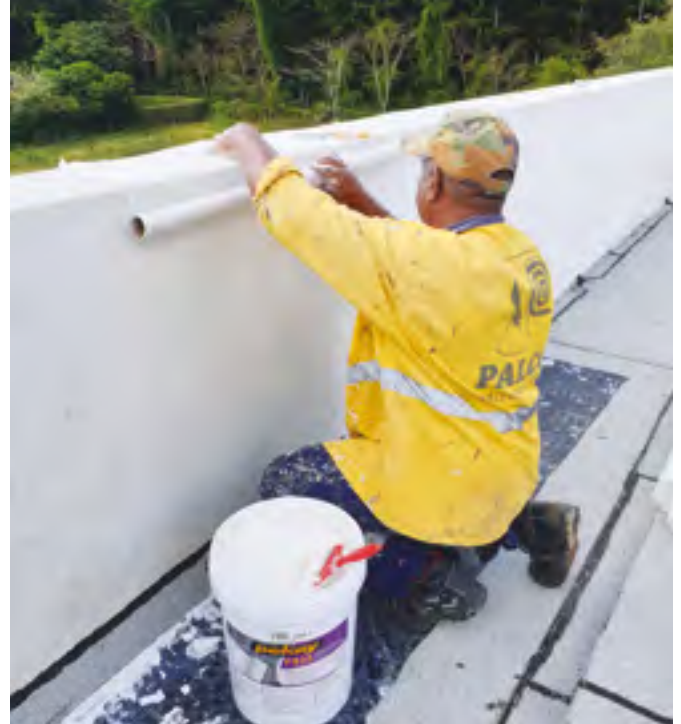

Through professionalism, integrity, experience, and highly skilled employees, we offer painting solutions to provide the highest quality painting and decorating services to our Residential and Commercial customers.

CONCRETE WORKS



The works included the leveling of existing roof slabs using cement-sand screed to correct surface irregularities and create proper slopes for water drainage.

Minor concrete patch repairs were also carried out in localized areas to restore damaged or uneven sections of the slab before the application of subsequent waterproofing layers.

BST - BETOSTYRENE for light weight concrete



Is composed of polystyrene spherules, treated to form a homogeneous, insulating concrete in conjunction with cement, and which is water-resistant and non-inflammable.

It can be used to reduce the weight / volume of concrete, for structure-bearing insulating concrete, or for insulating filling concrete.

APPLICATIONS

BST - BETOSTYRENE is used for new constructions as well as renovation, in individual homes or group-housing.

It can be used in the ground, walls and roofs:

- Construction of an insulating slab on back-fill
- Construction of insulating screed over the entire supporting structure, by replacing the traditional floating screed.


IN THE BUILDING

The advantages of BST BETOSTYRENE,

- Savings in weight
- Thermal and acoustical comfort
- Fire protection
- Is active in the sanitary aspects of the construction, (elimination of mould, swelling, parasites)
- Fill in all kinds of empty spaces
- Traditional applications

IN CIVIL ENGINEERING

The essential advantages of BST BETOSTYRENE, are to be found in the mechanical strenght and water-resistant characteristics, associated with its remarkable elastic modulus, as well as in the reproducibility of its results and its dimensional stability.

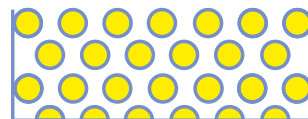

TBA-MAURICE LTEE.
Techniques des Bétons Allégés





WHAT WE DO

Palco Flooring is specialized in the application of industrial, commercial and domestic flooring products.

ASSISTANCE & SERVICE

Our goal is to offer the best services for a job perfectly mastered and executed.

Our aim is your satisfaction and contentment.

Always at the front line of its client's needs, Palco Flooring analyses and proposes tailor-made solutions adapted to client's situation and budget, and commits to production deadlines.

Always at the front line of its client's needs, Palco analyses and propose tailor made solutions adapted to the client's situation and budget.



TERACOAT



Breath^eCoat



BOSTIK

vuka floors
we have africa covered

Breath^eCoat

BETON CIRE VENEDEC TF



Bring timeless elegance to your space with Beton Cire VENEDEC TF – a seamless decorative finish that blends style and durability. Its sleek, modern look enhances floors, walls and furniture with a refined touch, while its easy maintenance and wide choice of colours make it perfect solution for both contemporary homes and commercial interiors.




TERACOAT

Teracoat Seamless is a stylish, durable flooring solution that combines modern design with long-lasting performance. Its smooth, joint-free finish offers a clean and elegant look, while being easy to maintain and highly resistant to daily wear. Available in a wide range of colours, it brings both beauty and practicality to any space.



POLISHED CONCRETE FLOORS

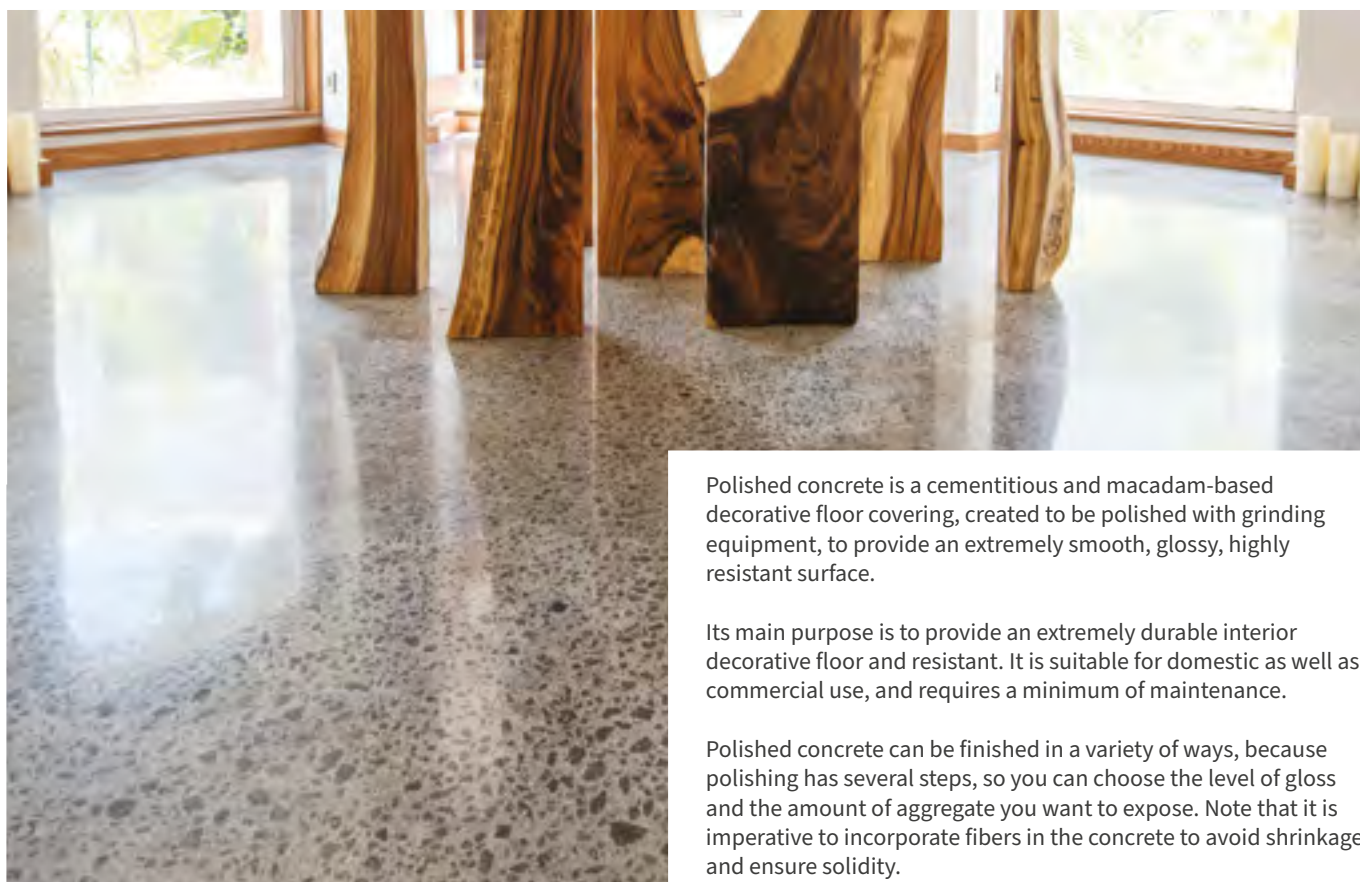

Polished concrete is a cementitious and macadam-based decorative floor covering, created to be polished with grinding equipment, to provide an extremely smooth, glossy, highly resistant surface.

Its main purpose is to provide an extremely durable interior decorative floor and resistant. It is suitable for domestic as well as commercial use, and requires a minimum of maintenance.

Polished concrete can be finished in a variety of ways, because polishing has several steps, so you can choose the level of gloss and the amount of aggregate you want to expose. Note that it is imperative to incorporate fibers in the concrete to avoid shrinkage and ensure solidity.

TERRAFLOOR



TERRAFLOOR ANTI-SLIP



The Terra floor is a decorative floor covering made of cement and different types of rocks, created to be polished with grinding equipment, it allows to obtain an extremely smooth highly resistant and easy to maintain surface. Several combination of color and type of rocks are available.



Vukafloors are advanced epoxy and polyurethane flooring systems built for durability and performance. Resistant to chemicals, abrasion, and heavy loads, they are ideal for industrial plants, warehouses, commercial areas, and public facilities. Easy to maintain and available in a range of finishes, Vukafloors combine strength, safety, and long-lasting protection for demanding environments.



VUKA CRETE MD

Vuka Crete MD is a multi component water based polyurethane compound incorporating antimicrobial agents, applied between 3.5mm and 4mm thickness.

VUKA CRETE HD

Vuka HD is a multi component water based polyurethane compound incorporating antimicrobial technology for industries requiring high strength, heavy duty chemical resistant floors. Trowel applied at between 6mm and 9mm thickness.

VUKA SEAL 200

Vuka Seal 200 is a high performance water dispersed epoxy system with a semi matt finish.

VUKA FLOW 401

Solvent free, filled, coloured epoxy compound providing a smooth durable floor topping installed from 2.5mm to 4mm thick.



Our self-levelling compound is a high-performance underlayment formulated to correct uneven substrates and create a smooth, level surface prior to floor coverings or coatings. Applied in thicknesses from 3-10mm, it offers excellent flow, rapid curing, and high compressive strength for lasting stability. With strong adhesion to concrete and cementitious screeds, it is the ideal preparation layer for decorative finishes, epoxy systems, polyurethane floors, tiles and more.





WHAT WE DO

Air Stream Limited is focused on top quality ventilation products as well as LED lighting.

ASSISTANCE & SERVICE

Focusing on total quality & service, careful attention is given to our clients during the sales process including free site visits, night lighting tests and proper repair and maintenance.

ECO CONTRIBUTION

Our daily eco contribution is also a priority to reduce the environmental impact of the appliances we distribute.

Thanks for choosing Air Stream Limited for your own peace of mind, we'll stay behind you all the way.



GREENSTREAM™
LED LIGHTS
EQUIPMENT

**GREEN
STREAM**



EXTRACTORS / VENTILATIONS

DOMESTIC VENTILATION



VORTICE SUPPLY & EXTRACT FANS REVERSIBLE VARIO SERIES

Vario 150/6 AR - 235 / 150 m³/hr
Vario 230/9 AR - 480 / 310 m³/hr
Vario 300/12 AR-LL-S - 1650 / 920 m³/hr
Vario 300/12 ARI-LL-S - 1750 / 1000 m³/hr



VORTICE PUNTO

Material: UV resistant plastic.
Nominal diameter 100 mm, 120 mm & 150mm
Maximum air flow: 90 m³/h, 175 m³/h & 350 m³/h
Vortice speed controller.



VORTICE LINEO IN LINES MAXED FLOW EXTRACT FANS

100 QVO - 155-200 m³/hr
100 VO - 180-255 m³/hr
125 VO - 250-365 m³/hr
160 VO - 385-550 m³/hr
200 VO - 790-1060 m³/hr
250 VO - 990-1350 m³/hr
315 VO - 1740-2300 m³/hr



INDUSTRIAL VENTILATION

E-RANGE VORTICE AXIAL FANS

Flow: 1000 m³/hr
1850 m³/hr
3150 m³/hr
3200 m³/hr
4800 m³/hr
7700 m³/hr
10,000 m³/hr
14,800 m³/hr



VORTICE VORTICEL MP

Nominal diameter 300 mm
Ventilation port fashioned in one piece.
Protective grille
1 speed asynchronous
single phase AC motor.
Maximum air flow 3,500 m³/h
Vortice speed controllers.



STREAM MAX INDUSTRIAL FAN

Wall fans:
450 / 650 / 750mm
With Stand available for: 650 / 750mm



INDUSTRIAL VENTILATION



VORTICENT C E SERIES

Single phase AC motor with 1 operating speed and shaft turning in all bearings. Centrifugal impeller with forward-curved blades of zinc-coated steel, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3).

Maximum air flow: 300 m³/h.



ACCESSORIES

GRAVITY GRILLES

100 / 120 / 150 /
160mm




AIR DUCT JOINT ROLLS

25mm x 5mts



REINFORCED ALUMINIUM TAPE

72mm



MO-ALUMINIUM FLEXIBLE ROLLS

102 / 127 / 152 / 202 / 318mm
x 10mts Rolls.



AIR VALVE

100 / 150 / 200mm.



OUTDOOR LIGHTS



E27 LED STRING LIGHT


10 meters - IP65 - 240V



IP54 LED LIGHT

- 8054 / 9161: Directional LED
- 7142 / 9061: Up & Down LED

LED bulb GU10, 240V, 4000K

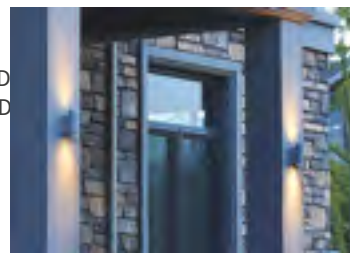

AVAILABLE COLOURS



Black Silver White Rust



7142



8054

WALL LIGHT

IP44 - 220-240V - E27 (Max 18W)



LANDSCAPE & INDUSTRIAL LIGHTING

STREET LED LIGHT

Street light 30w, 40w, 80w
IP65 - 240V - 6500-7000K



5542



1461 - GU10 LED bulb

LED DOWNLIGHT

Downlight 3x1W - 240V
- 3000/5000K
Available in dimmable



40W



60W

GARDEN LED FLOOD LIGHT

IP65 - 240V - 3W
2400-2700K / 2700-2900K / 6000-6500K
45° beam



120W



240W

OUTDOOR LIGHTS

SQUARE 5 SIDE WALL LAMP

8W / 3CCT / BLACKLED



WALL LIGHT RECTANGULAR

10W / 20W / 3CCT IP65 BLACK / WHITE



240 DEGREE ADJUSTABLE WALL LIGHT

10W / 3000K / BLACK / WHITE / IP65



OUTDOOR SOLAR LIGHTS



SOLAR WALL LIGHT 20W

20W - 3000K (warm) - Separated Solar Panel - PIR - 3 Lighting modes - Remote control IP65



SOLAR STEP

1W - 3000K (warm) - Constant lighting at night - Alu + Stainless Steel - IP65



SOLAR YARD

25W - 4000K - 3 Lighting modes - PIR 120° - IP65



SOLAR BOX

1000LM - 4000K - 3 Lighting modes - PIR - IP64



OUTDOOR SOLAR LIGHTS



SOLAR WALL PRO

20W - 4000K - 3 Lighting modes - PIR 120° - Rotatable - IP65



SOLAR STREET

Colour Temp/ 4000k - Power: 3000LM - Material: Aluminium PIR 120° - 3 Lighting modes with remote control - Size: 21x21 cm (bar not included) - IP65



SOLAR MINI ARM

20W - 3000K (warm) - 3 Lighting modes - Remote control - PIR 120° - IP65



SOLAR FENCE

Pair of 2 3000K (warm) - 500LM - 50LM Back Light - PIR - IP65



TWIN SOLAR

1000LM - 5700K - 3 Lighting modes - PIR 120° - IP65




SOLAR DECK

50LM - 3000K (warm) - With or without spike - IP65




SOLAR ARM

20W - 3000K (warm) - 3 Lighting modes - Remote control - PIR 120° - IP65



SOLAR TORCH

Movable solar wall light, detachable from charging panel
Colour Temp: 4000K - Power: 1000LM - PIR up to 5m - IP65



OUTDOOR SOLAR LIGHTS




SOLAR TUBE

1000LM - 2 Colours temp (warm or white) - 2 Lighting modes - PIR
> 5 meters - IP65



MODERN LANTERN

Portable lighting with battery
2W / 212 Lumens - Colour
Temperature: 3000K - Material
Alu / PC - Height 22 cm - IP54

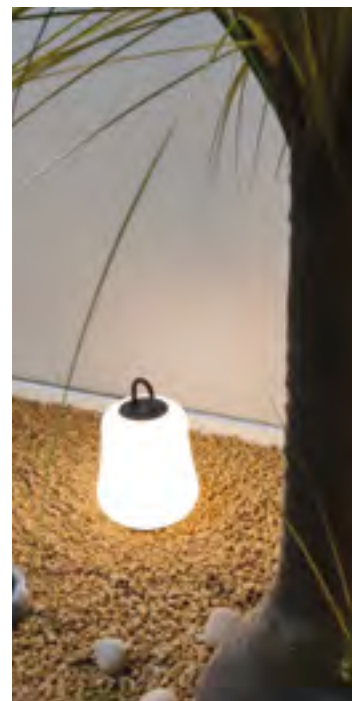


SOLAR POST

Auto switch On/Off - Colour
Temp: 3000K - Power: 100LM -
Material: Aluminium / PC - IP65



SOLAR WALL ES

8W - 1000LM - 3000K (warm) -
Separated Solar Panel - Cable
3 meters - IP65



CLASSIC LANTERN

Portable lighting with battery
2W / 200 Lumens - Colour
Temp: 3000K - Material Alu /
Glass - Height 47.5 cm - IP54



SOLAR BOLLARD 25

Pair of 2 - Auto switch On/Off
-Colour Temperature: 3000K
- Power: 100LM - Material:
Aluminium / PC - Height: 80
cm - IP65



INDOOR LIGHTS



RECESSED LED PANEL

For fixed ceiling installation.
240V
3W / 9W - 3000K
18W - 4500K



SURFACE LED PANEL

For fixed surface installation.
240V - 6W / 12W / 18W
3000K



RECESSED OR SURFACE LED PANEL

For fixed ceiling installation.
240V
600 x 600mm - 40W - 3000K / 4200K / 6500K
600 x 300mm - 20W - 6500K
1200 x 300mm - 40W - 6500K



LED TUBES & BRACKETS

Single or Twin base: 4FT - 24W - 6500K



CONNECTORS



IP65 CONNECTORS



IP65 T-CONNECTORS



IP 65 4 WAY-CONNECTORS



G125
E27 Base - 2W
240V - 2700K
G125 Diam



G125
E27 Base - 4W
240V - 2700K
G125 Diam



G95
E27 Base - 2W
240V - 2700K
G95 Diam



G95
E27 Base - 4W
240V - 2700K
G95 Diam



G80 - 4HP
E27 Base - 4W HP
240V - 2700K
G80-HP Diam



G80 - 2HP
E27 Base 2W HP
240V - 2700K
G80 - HP Diam



ST64 HP
E27 Base - 2W
240V - 2700K
ST64 HP Diam



ST64
E27 Base - 4W
240V - 2700K
ST64 Diam



G35 BULB E27
E14 Base - 4W
240V - 2700K
G35 Diam

PALCO

***BUILDING
STRONGER
FUTURES***

Tel: 211 6609 | palco.mu

Allee des Manguiers, Les Pailles, 11221, Mauritius