

KINGRINDER MANUAL HAND COFFEE GRINDER MANUAL

MODEL: KO/K1/K2



WHAT'S IN THE BOX

- Grinder



- Handle with Plastic Lid



- Replacement parts.



- Brush



There may be different versions; pictures are for reference only.

HOW TO OPERATE THE GRINDER?

- 1. Remove the Powder receiver.
- 2. Hold the grinder body and the handle firmly together with the palm of one hand to prevent the handle from turning.
- 3. Turn the adjustment nut clockwise until you feel resistance, **Do not overtighten.**
- 4. Note the number (or position) indicated by the triangle marker after zeroing. This is your starting reference point.
- 5. Turn the adjustment nut counterclockwise to the recommended grind setting (see the table below).
- 6. Reattach and tighten the Powder receiver, then remove the handle.
- 7. Pour the coffee beans into the grinder.
- 8. Reinstall the handle and begin grinding. Continue until you no longer hear the sound of beans being ground.



RECOMMENDED GRINDER SETTINGS

Brewing methods	K0	K1	K2
Turkish coffee	Not recommended	20 clicks	20 clicks
Espresso	Not recommended	40 clicks	40 clicks
Moka pot AeroPress	60 clicks	60 clicks	60 clicks
Pour-Over	100 clicks	100 clicks	100 clicks
French Press	140 clicks	140 clicks	140 clicks

※One round is equivalent to 40 clicks.
※For reference only; adjustments may be made according to personal preference.

HOW TO CLEAN THE GRINDER?

1. Remove the Powder receiver.
2. Hold the grinder body and the handle firmly together with the palm of one hand to prevent the handle from turning.
3. Rotate the spin dial **counterclockwise** to disassemble the grinder.
4. Take out the components in order: spin dial, numerical dial, inner burr, spring, and bearing cover. **※No need to remove the central shaft.**
5. Use the brush to clean the grinder.
6. Place the components back in order: bearing cover and spring. There are two shapes of the bearing cover: flat design and curved design. Ensure the curved design faces upward.
7. Attach the inner burr and the numerical dial to the rectangle shape of the central shaft to proceed with the grinder assembly.
8. Install the spin dial and rotate clockwise to complete the assembly.



PRECAUTIONS:

1. The entire grinder **should not be washed with water**. Please use the brush for cleaning.
2. Please **disassemble and clean thoroughly** on a regular basis, with intervals not exceeding **30 days**.
3. Do not rotate the handle when the grind setting is **at 0 or below 16 clicks**, as this could damage the burr set.
4. For precision reasons, do not dismantle the exterior burr. Avoid forcefully disassembling the grinder with tools.
5. Only grind coffee beans. Do not grind unroasted coffee beans.
6. Avoid spraying water directly onto any part of the grinder. You can perform RDT by spraying water on another container.
7. **Avoid second grinding** as the coffee fine powder may block the parts.
8. Please store in a dry environment.


HOW TO ASSEMBLE THE PLASTIC LID AND HANDLE?

1. **Take out the black O-ring** from the groove on the plastic Lid.
2. Insert the provided white O ring.
3. Ensure that **the white O-ring is correctly installed into the groove** on the handle for proper fixation.



HOW TO USE IT BY ELECTRIC?

You need to prepare:

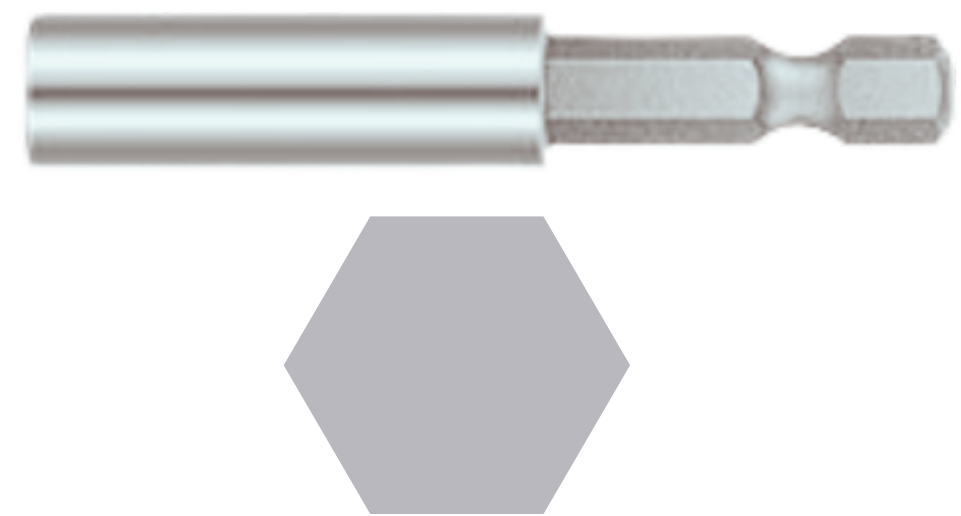

Electric screwdriver at a **15~25Nm torque.**

6.35mm(1/4 inch) Hex Shank.



Take out the handle and install the black O-ring to the plastic lid.



Ensure that the bit holder is fully inserted into the center shaft, grasp the grinder firmly, and gradually apply power.

※ **Slow down the grinding speed to prevent damage to the central shaft.**