



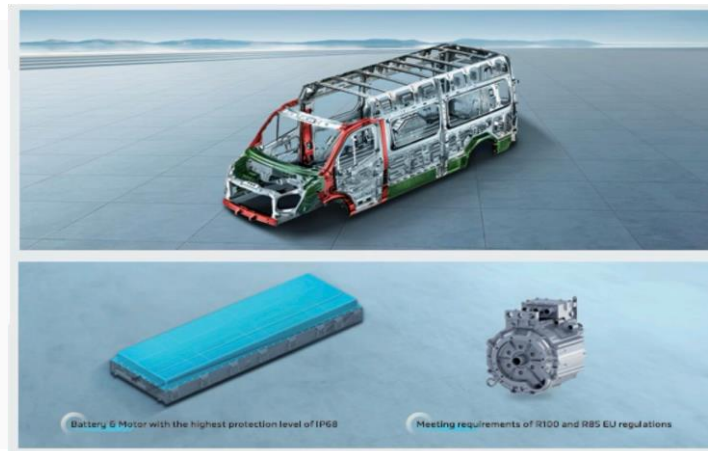

LHD: SWVTA (Ready)

| Model | eTOANO PRO | |
|-------------------------------------|-----------------------------------|-----------------------------------|
| Specification | | |
| GVW (kg) | 3495 | 3495 |
| Curb weight (kg) | 2560-2720 | 2490-2660 |
| Wheelbase | 3750 | 3350 |
| Vehicle dimensions (mm) | 5990×2000×2760/2445 | 5495×2000×2760/2445 |
| Internal dimensions (mm) | 1950×1780×3580/3045 | 1666×1780×3580/3045 |
| Cargo compartment capacity (m³) | 10.5~12.4 | 9.0-10.6 |
| Driving range-WLTP (km) | 252/357 | 252/357 |
| Battery | | |
| Battery supplier | CATL | CATL |
| Type of the battery | LFP | LFP |
| Capacity of the battery (kWh) | 77.28/100.96 | 77.28/100.96 |
| Charging mode | DC/AC | DC/AC |
| Charging time (20℃) SOC 20%-100% | DC:36min/ AC: 7 DC:40min/ AC:9 | DC:36min/ AC: 7 DC:40min/ AC:9 |
| Charging Base | CCS2 | CCS2 |
| Motor | | |
| Motor type | PMSM | PMSM |
| Peak power (kW) | 130 | 130 |
| Peak torque (N·m) | 330 | 330 |
| Basic equipment | | |
| ESC | ● | ● |
| ACC | ● | ● |
| FCW | ● | ● |
| AEB+LDWS | ● | ● |
| LDW | ● | ● |

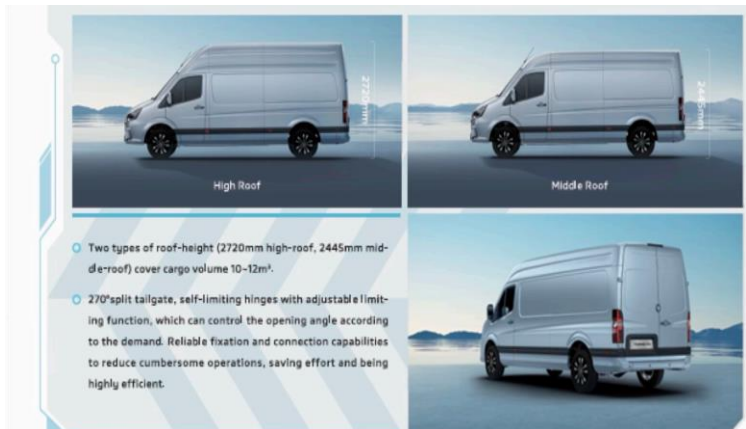


- ❑ Two roof height options (2720mm / 2445mm),
- ❑ covering cargo volumes of 9-12m³.
- ❑ 270° split rear doors with self-limiting hinges
- ❑ featuring adjustable opening angles. Reliable fixing and connection capability reduces complexity, saves effort, and improves efficiency.

- ❑ Integrated body structure with high-strength steel frame, safe and reliable, compliant with EU Regulation R95.
- ❑ Motor rated with IP68 highest protection level, compliant with EU Regulations R100 and R85.

- ❑ Heated steering wheel: reduces the impact of cold weather on driving comfort.
- ❑ 12.3-inch dual screens: Multi-screen interaction for comprehensive function display, enhancing driver assistance and entertainment features



- ❑ FMS — Fatigue Monitoring System
- ❑ ESC — Electronic Stability Control
- ❑ LDWS — Lane Departure Warning System
- ❑ AEB — Autonomous Emergency Braking
- ❑ BSD — Blind Spot Detection

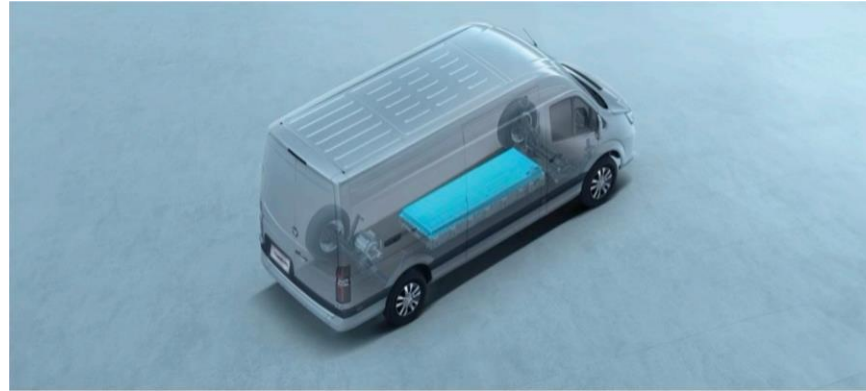

- ❑ Equipped with a significantly improved new-generation
- ❑ CATL battery
- ❑ Battery energy density has improved
- ❑ 77 kW·h battery > 150 Wh/kg
- ❑ 100 kW·h battery > 155 Wh/kg



- ❑ 360° panoramic view providing a clear and direct blind-spot view
- ❑ Standard features include keyless entry and one-button start, dual airbags for driver and passenger, adaptive
- ❑ cruise control (ACC), forward collision warning (FCW),
- ❑ fatigue monitoring system (FMS), lane departure warning system (LDWS), and more.