



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:

HORNET™ G2 4060 psi • 15 l/pm



Petrol Driven



Cold Water



Daily Usage

FIELDS OF APPLICATION

- Roof Cleaning
- Painting Contractors
- Cleaning Contractors
- Boat Yards and Ports
- Agricultural Equipment
- Councils & Government



JETWAVE
POWERED by
HONDA™

The Jetwave® Hornet G2™ heavy duty professional cold water petrol powered by HONDA™ pressure washer is revolutionary in its design and innovation. Australian engineered and assembled using only the best quality Italian and global components; it offers an industry first multi configurable design to maximise space and efficiency.



HERO INNOVATIONS



Protection

Formed stainless steel cover to safeguard components and for work site safety.



Smart

Industry first customisable modular build with precision heavy gauge, steel chassis. Build it your way.



Functional

Easily accessible singular panel mounted control(s).



Optimise

Anti-vibration protection for a quieter reliable performance.



Convenient

Top lifting eyelets for onsite lifting ability.



Featured

J5000™ Durotech™ Gun with swivel and ceramic ball.



Versatile

Multiple hose reel configurations.

STANDOUT FEATURES



Professional JW Italian triplex plunger pump delivers performance and longer life.



Low speed professional pump for increased reliability and longer maintenance intervals.



Easy start HONDA™ GX390 Industrial Series OHV Engine.



Dual M22 screw hose coupling system.



Heavy duty washable inlet water filter.



Jetwave Safety System™ (JSS) thermal valve to prevent overheating in excessive bypass and over pressurisation.



Integrated accessory storage for gun and lance.



Professional line accessories.



Quality pressure gauge.



Zero line pressure brass adjustable unloader valve.



Optional key start.

Registered Design No.: 201710299



Jetwave Group
 72-74 Richmond Road
 Keswick | Adelaide
 South Australia | 5035 | AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au



Compact - Modular frame design with top lift panels.

Protection - Designed for durability and a long life.

Control - Fascia mounted controls with plug n' go functionality.


Robust - Frame with gun and lance holder.

Quality - Industry proven 'Italian' pump.

Power - Easy start HONDA™ GX390 engine.

Flexibility - Multi configurable compact frame.

STANDARD EQUIPMENT

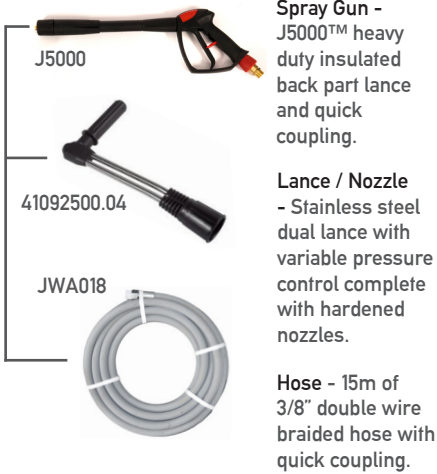

Spray Gun - J5000™ heavy duty insulated back part lance and quick coupling.

Lance / Nozzle - Stainless steel dual lance with variable pressure control complete with hardened nozzles.

Hose - 15m of 3/8" double wire braided hose with quick coupling.

OPTIONAL ACCESSORIES

Item	p/n	Part Number
1. Complete Turbo Head with Lance	p/n	JWA160.04
2. Additional High Pressure Hose (per metre)	p/n	52001
3. High Pressure Swivel	p/n	26105000
4. LS12 Foaming Lance with Tank	p/n	JWA221-LS12
5. High Pressure Hose Reel (cap 30m or 60m)	p/n	1060CMPL 1067CMPL
6. Hammerhead™ Whirlaway 21" ABS	p/n	JWA-FSC21.04
7. Hammerhead™ Whirlaway 21" Stainless Steel	p/n	JWA-FSC22.04
8. Engine Hour Meter	p/n	19598
9. Giraffe™ Alloy Telescopic Lance	p/n	JWA-TELE7.3
10. Sandblasting Kit	p/n	JWA164
11. Sludge Kit	p/n	80005
12. Drain Kit	p/n	HOP2X15VF

MACHINE OPTIONALS

Item	p/n	Part Number
1. Stainless Steel Bypass Tank	p/n	90008-12G2
2. Low level Water Cut Out	p/n	JWA220
3. Flat Bed Mounting Kit	p/n	JWA406
4. 5L Stainless Steel Chemical Holder	p/n	CHEM-5L

Product Code	p/n	CW4000-15PG2
--------------	-----	--------------

TECHNICAL DATA

Working Pressure	psi / bar	4000 / 275
Flow Rate	l/pm	15
Max Water Inlet Temp	°c / °f	60 / 140
Class (AS/NZS: 4233)	grade	A

INTENDED APPLICATION

Usage Frequency	hours / type	4 - 6 daily / Constant
Category of Dirt / Debris	type	Medium

MOTOR FEATURES

Engine	type	HONDA™ GX390 (4 stroke, air cooled)
Power	hp / cc	13 / 390
Fuel Supply	type	Unleaded
Fuel Capacity	litres	6.1
Low Oil Shutdown	y / n	Y
Hour Meter	y / n	N
Starting System	type	Recoil / Pull

HYDRAULIC FEATURES

Pump / Head / Pistons	type	Interpump® Plunger Triplex / Brass / Ceramic
Motor Pump Coupling	type	Gearbox Drive
Pump Speed	rpm	1450
Unloader Valve	type	Independent (Zero)
Safety Valve	y / n	Y
Orifice / Nozzle	size	040

OTHER FEATURES

Electric / Key Start Available	y / n	Y (p/n: C4000-15PEG2)
Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	Y
Frame Structure	type	Modular skid with heavy gauge steel covers
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Downstream low pressure adjustable

DIMENSIONS & WEIGHT

Approx Weight	kg	80 unit / 86 boxed
Unit Dimensions	mm	1110(L) x 700(W) x 860(H)
Boxed Dimensions	mm	970(L) x 600(W) x 670(H)
Number per Pallet	type: pieces	AS: 2 / Euro: 1

WARRANTY(S)

Engine Warranty	years	3	
Warranty	years	1	

JETWAVE
 POWERED by
HONDA

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.
 V1.0 12/2019

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).