





Shenzhen TLP Electronics Co.,Ltd

<https://www.topledprofile.com>


COB flexible led strip										
Model	CCT (K)	CRI	LEDs	PCB width (mm)	Voltage	Power (W/M)	luminance (LM/M) @3000k	luminance(LM/M) @3000k	Cut size mm	
ST20Q320Vx-Cx	2700K/3000K/4000K/6500K	>90	320	8mm	24V	10	962	96.2	24V:50mm	
				10mm	24V	12	1138	94.8	24V:50mm	
ST20Q360Vx-Cx	2700K/3000K/4000K/6500K	>90	360	8mm	12V	10	748	74.8	12V:50mm	
				10mm	12V	12	890	74.2	12V:50mm	
ST20Q420Vx-Cx	2700K/3000K/4000K/6500K	>90	420	8mm	24V	10	836	83.6	24V:50mm	
				10mm	24V	12	822	82.2	24V:50mm	
ST20Q480Vx-Cx	2700K/3000K/4000K/6500K	>90	480	4mm	12V/24V	5	519	103.8	12V:25mm/24V:50mm	
ST20Q480Vx-Cx	2700K/3000K/4000K/6500K	>90	480	8mm	12V/24V	5	519	103.8	12V:25mm/24V:50mm	
		>90				10	1029	102.9		
		>90				15	1527	101.8		
ST20Q480Vx-Cx	2700K/3000K/4000K/6500K	>90	480	10mm	12V/24V	5	519	103.8	12V:25mm/24V:50mm	
		>90				10	1029	102.9		
		>90				15	1527	101.8		

Accessories

name	Photos	Description	Unit price
Connector		Board width: 8mm/10mm optional	US\$0.45
Wire connector		Board width: 8mm/10mm optional 15CM 20# red and black wire at one end	US\$0.60



COB colorful flexible soft light belt

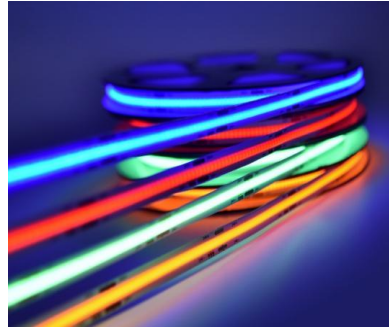

Model	led	Color	Wavelength (NM)	luminance (LM/M) @3000k	luminance(LM/M) @3000k	LEDs	PCB width (MM)	Voltage	Power (W/M) @10W/M	Cut size mm
ST20Q480Vx-Cx	COB	Blue	455-465nm	230	23	480	8MM	12V/24V	5/10/15W Optional	12V:25mm/24V:50mm
		Green	520-530nm	1570	157					
		Red	620-630nm	87.6	8.76					
		Yellow	585-595nm	980	98					
		Orange	595-605nm	580	58					
		Tiffany Blue	485-495nm	730	73					
		Marrs Green	495-505nm	589	58.9					
		Plastic Pink	645-655nm	174	17.4					
ST20Q480Vx-Cx	COB	Blue	455-465nm	230	23	480	10MM	12V/24V	5/10/15W Optional	12V:25mm/24V:50mm
		Green	520-530nm	1570	157					
		Red	620-630nm	87.6	8.76					
		Yellow	585-595nm	980	98					
		Orange	595-605nm	580	58					
		Tiffany Blue	485-495nm	730	73					
		Marrs Green	495-505nm	589	58.9					
		Plastic Pink	645-655nm	174	17.4					

COB flexible led strip

Model	Color (K)	CRI	LEDs	PCB width (mm)	Voltage	Power (W/M)	luminance (LM/M) @3000k	luminance(LM/M) @3000k	Cut size mm	
ST20Q320Vx-Cx	2700K/3000K/4000K/6500 K	>90	320	8mm	24V	4.5	962	96.2	24V:50mm	
				10mm	24V	8	1138	94.8	24V:50mm	
ST20Q360Vx-Cx	2700K/3000K/4000K/6500 K	>90	360	8mm	12V	4.5	748	74.8	12V:50mm	
				10mm	12V	8	890	74.2	12V:50mm	