


Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyao Street, Baoan District, Shenzhen(518108)

<https://www.topledprofile.com>

Silicone neon light with 1010 front light-emitting IP67---constant voltage technology



product features:

Silicone neon light with 1010 front light-emitting IP67, DC24V, vertical bending, positive outlet mode;

The bending diameter is 100mm, the section size: 10mm*10mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M
1	N1010V24-C21	2100K	2000-2200K	35.7mm	>90	DC24V	5	332.5	5.0
							10	644.1	5.0
2	N1010V24-C24	2400K	2300-2500K	35.7mm	>90	DC24V	5	354.8	5.0
							10	684.7	5.0
3	N1010V24-C27	2700K	2600-2800K	35.7mm	>90	DC24V	5	380.2	5.0
							10	737.9	5.0
4	N1010V24-C30	3000K	2900-3100K	35.7mm	>90	DC24V	5	401.6	5.0
							10	785.9	5.0
5	N1010V24-C35	3500K	3400-3700K	35.7mm	>90	DC24V	5	371.3	5.0
							10	718.7	5.0
6	N1010V24-C40	4000K	3800-4300K	35.7mm	>90	DC24V	5	429.6	5.0
							10	828.8	5.0
7	N1010V24-C50	5000K	4800-5300K	35.7mm	>90	DC24V	5	427.6	5.0
							10	827.7	5.0
8	N1010V24-C60	6000K	5900-6400K	35.7mm	>90	DC24V	5	419	5.0
							10	810.6	5.0
9	N1010V24-Cr	red	620-625nm	35.7mm	--	DC24V	5	153.7	5.0
							10	331.6	5.0
10	N1010V24-Cg	green	515-525nm	35.7mm	--	DC24V	5	512.7	5.0
							10	920.8	5.0
11	N1010V24-Cb	blue	460-465nm	35.7mm	--	DC24V	5	93.96	5.0
							10	173.6	5.0
12	N1010V24-Cy	yellow	585-595nm	35.7mm	--	DC24V	5	127.4	5.0
							10	268.1	5.0
13	N1010V24-Cp	pink	/	35.7mm	--	DC24V	5	179	5.0
							10	347.5	5.0

Accessories



Name	description	Model	unit price	Photos
Aluminum profile	1m/bar aluminum profile (12.4*13*1000mm)	N1010-AP	\$1.25	
Install the buckle	Installation buckle: 1 pack = 1 buckle (11.6*7.6*8mm) + 1 screw	N1010-MC	\$0.05	
"IP67 plug 2 core single color"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N1010-NCC2	\$0.33	
IP67 tail plug	1 silicone plug	N1010-CEC	\$0.13	
scissors	1 piece	S-1	\$15.00	

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)


<https://www.topedprofile.com>

Silicone neon light with 1212 front light-emitting IP67---constant voltage technology

		<p>product features: Silicone neon lights with 1212 front light-emitting IP67, DC24V, vertical bending, three outlet methods: front/side/bottom The bending diameter is 200mm, the section size: 12mm*12mm(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting; Unique plug design, this plug can be quickly and easily installed to meet the needs of different lengths, without welding wires and waterproofing;</p>
--	---	---

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M
1	N1212V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	290.8	5
							10	559.8	5
2	N1212V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	289.6	5
							10	562.4	5
3	N1212V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	349.5	5
							10	668.3	5
4	N1212V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	329.7	5
							10	638.8	5
5	N1212V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	354.1	5
							10	661.7	5
6	N1212V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	347.1	5
							10	677.4	5
7	N1212V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	346.7	5
							10	681.9	5
8	N1212V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	336.2	5
							10	661.8	5
9	N1212V24-Cr	red	620-625nm	50mm	--	DC24V	5	132	5
							10	276.7	5
10	N1212V24-Cg	green	515-525nm	50mm	--	DC24V	5	374	5
							10	703	5
11	N1212V24-Cb	blue	460-465nm	50mm	--	DC24V	5	70	5
							10	129	5
12	N1212V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	27.9	5
							10	50.7	5
13	N1212V24-Cp	pink	/	50mm	--	DC24V	5	143	5
							10	278	5
14	N1212V24-Ca	CCT color temperature	WW:2000-2300K	50mm	>90	DC24V	5	316	5
			W:5600-6300K				10	646.1	5
15	N1212V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	174	5
			Green:515-525nm				10	288	5

Accessories

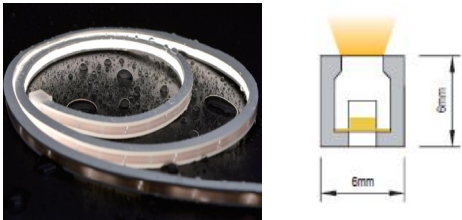
Name	description	Model	unit price	Photos
Aluminum profile	1m/bar aluminum profile (17.2*14*1000mm)	N1212-AP	\$1.83	
Install the buckle	Installation buckle: 1 pack = 1 buckle (17.2*14*20mm) + 1 screw	N1212-MC	\$0.15	
"IP67 plug 2 core single color"	1 pack = 1 PC assembly plug + 1x 30cm PVC black wire (front exit, bottom exit, side exit)	N1212-NCC2	\$1.00	
"IP67 plug 3-core color temperature"	1 pack = 1 PC assembly plug + 1x 30cm PVC black wire (front exit, bottom exit, side exit)	N1212-NCC3	\$1.13	
"IP67 plug 4-pin RGB"	1 pack = 1 PC assembly plug + 1x 30cm PVC black wire (front exit, bottom exit, side exit)	N1212-NCC4	\$1.25	
IP67 tail plug	1 pack = 1 PC assembled tail plug + 4 screws	N1212-CEC	\$0.70	
"IP67 Waterproof Connector 2 core single color"	1 pack = 1x 30cm PVC black IP67 waterproof male connector + 1x 30cm PVC black IP67 waterproof female connector	N1212-MF2	\$2.05	
"IP67 Waterproof Connector 3-core color temperature"	1 pack = 1x 30cm PVC black IP67 waterproof male connector + 1x 30cm PVC black IP67 waterproof female connector	N1212-MF3	\$2.38	
"IP67 Waterproof Connector 4-pin RGB"	1 pack = 1x 30cm PVC black IP67 waterproof male connector + 1x 30cm PVC black IP67 waterproof female connector	N1212-MF4	\$3.00	
"IP67 PVC black wire 2 core single color"	1 meter long	N1212-C2	\$0.45	
"IP67 PVC black wire 3-core color temperature"	1 meter long	N1212-C3	\$0.58	
"IP67 PVC black wire 4-pin RGB"	1 meter long	N1212-C4	\$0.65	
Scissors	1 piece	S-1	\$15.00	
Shearing fixture	1 piece	N1212-1	\$2.50	

Shenzhen TLP Electronics Co.,Ltd






No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)

<https://www.topledprofile.com>

Silicone neon light with 0606 side light IP67--constant voltage technology

				<p>product features: Silicone neon light with 0606, side light-emitting IP67, DC24V, vertical bending, three outlet methods: front/side/bottom The bending diameter is 50mm, the section size: 6mm*6mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;</p>						
No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	lumina nce LM	Maximu m cascade	
1	N0606V24-C17	1700	1600-1900K	25	>90	DC24V	6	235	5	
2	N0606V24-C22	2200	2100-2400K	25	>90	DC24V	6	325	5	
4	N0606V24-C24	2400	2200-2600K	25	>90	DC24V	6	330	5	
5	N0606V24-C26	2600	2400-2800K	25	>90	DC24V	6	337	5	
6	N0606V24-C28	2800	2600-3000K	25	>90	DC24V	6	345	5	
7	N0606V24-C32	3200	2900-3500K	25	>90	DC24V	6	348	5	
8	N0606V24-C38	3800	3500-4200K	25	>90	DC24V	6	358	5	
9	N0606V24-C44	4400	4000-4800K	25	>90	DC24V	6	353	5	
10	N0606V24-C56	5600	5200-6000K	25	>90	DC24V	6	379	5	

Accessories


product name	Description	Model	Unit price	Photo
Aluminum profile	1m/bar aluminum profile (8.5*6*1000mm)	N0606-AP	\$1.20	
Install the buckle	Installation buckle: 1 pack = 1 buckle (8.5*6*20mm) + 1 screw	N0606-MC	\$0.18	
IP67 plug 2 core single color"	1 pack = 1 silicone plug +1x 30cm 24# two-core gray white wire (front exit, bottom exit, side exit)	N0606-NCC2	\$0.30	
IP67 tail plug	1 silicone plug	N0606-CEC	\$0.12	
scissors	1 piece	S-1	\$18.00	

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)

<https://www.topleprofile.com>

Silicone neon light with 1615 front light-emitting IP67---constant voltage technology



product features:

Silicone neon light with 1615 front light-emitting IP67, DC24V, vertical bending, three outlet methods: front/side out/bottom out;
The bending diameter is 200mm, the section size: 16mm*15mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;
Unique plug design, this plug can be quickly and easily installed to meet the needs of different lengths, without welding wires and waterproofing;

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade
1	N1615V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	240.3	5
							10	459.9	5
							15	627.5	5
2	N1615V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	242	5
							10	468.1	5
							15	659.7	5
3	N1615V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	285.8	5
							10	552.7	5
							15	771.5	5
4	N1615V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	286.3	5
							10	539.3	5
							15	766.9	5
5	N1615V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	300.7	5
							10	583.9	5
							15	815.8	5
6	N1615V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	294.1	5
							10	573.4	5
							15	807	5
7	N1615V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	297.8	5
							10	570.3	5
							15	793.9	5
8	N1615V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	293.9	5
							10	572.9	5
							15	782.6	5
9	N1615V24-Cr	red	620-625nm	50mm	--	DC24V	5	111.6	5
							10	237.5	5
							15	323.2	5
10	N1615V24-Cg	green	515-525nm	50mm	--	DC24V	5	308	5
							10	548.2	5
							15	697.4	5
11	N1615V24-Cb	blue	460-465nm	50mm	--	DC24V	5	57	5
							10	106.9	5
							15	148.6	5
12	N1615V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	25.6	5
							10	44.4	5
							15	61	5
13	N1615V24-Cp	Pink	/	50mm	--	DC24V	5	116.7	5
							10	224.5	5
							15	302.2	5
14	N1615V24-Ca	CCT color temperature (2200+6000K)	WW:2000-2300K	50mm	>90	DC24V	5	279.5	5
			W:5600-6300K				10	569.6	5
			W+WW:3600-4200K				15	766.2	5
15	N1615V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	147.8	5
			Green:515-525nm				10	267.8	5
			Blue:460-465nm				15	323.5	5

16	N1615V24-Crgbw	RGB+2700K	2200-2600K	62.5mm	--	DC24V	5	181.9	5	
							10	337.3	5	
							15	465.5	5	
		RGB+3000K	2500-2900K				5	188	5	
							10	357.7	5	
							15	500	5	
		RGB+4000K	3400-4000K				5	192.9	5	
							10	373.8	5	
							15	503.7	5	
		RGB+6000K	5000-5800K				5	189.5	5	
							10	366	5	
							15	496.4	5	

Accessories


Name	description	Model	unit price	Photos
Aluminum profile	1m/bar aluminum profile (20.5*17.6*1000mm)	N1615-AP	\$2.25	
Install the buckle	Installation buckle: 1 pack = 1 buckle (20.5*17.6*20mm) + 1 screw	N1615-MC	\$0.18	
"IP67 plug 2 core single color"	1 pack = 1 PC assembly plug +1x 30cm PVC black wire (front exit, bottom exit, side exit)	N1615-NCC2	\$1.13	
"IP67 plug 3-core color temperature"	1 pack = 1 PC assembly plug +1x 30cm PVC black wire (front exit, bottom exit, side exit)	N1615-NCC3	\$1.25	
"IP67 plug 4-pin RGB"	1 pack = 1 PC assembly plug +1x 30cm PVC black wire (front exit, bottom exit, side exit)	N1615-NCC4	\$1.38	
IP67 plug 5-pin RGBW	1 pack = 1 PC assembly plug + 1x 30cm PVC black wire (front exit, bottom exit, side exit)	N1615-NCC5	\$1.50	
IP67 tail plug	1 pack = 1 PC assembled tail plug + 4 screws	N1615-CEC	\$0.75	
"IP67 Waterproof Connector 2 core single color"	1 pack = 1x 30cm PVC black IP67 waterproof male connector + 1x 30cm PVC black IP67 waterproof female connector	N1615-MF2	\$2.05	
"IP67 Waterproof Connector 3-core color temperature"	11 pack = 1x 30cm PVC black IP67 waterproof male connector + 1x 30cm PVC black IP67 waterproof female connector	N1615-MF3	\$2.38	
"IP67 Waterproof Connector 4-pin RGB"	11 pack = 1x 30cm PVC black IP67 waterproof male connector + 1x 30cm PVC black IP67 waterproof female connector	N1615-MF4	\$3.00	
"IP67 Waterproof Connector 5-pin RGBW"	1 pack = 1x 30cm PVC black IP67 waterproof male connector + 1x 30cm PVC black IP67 waterproof female connector	N1615-MF5	\$3.13	
"IP67 PVC black wire 2 core single color"	1 meter long	N1615-C2	\$0.45	
IP67 PVC black wire 3-core color temperature"	1 meter long	N1615-C3	\$0.58	
"IP67 PVC black wire 4-pin RGB"	1 meter long	N1615-C4	\$0.65	
"IP67 PVC black wire 5-pin RGBW"	1 meter long	N1615-C5	\$0.75	
scissors	1 piece	S-1	\$15.00	
Shearing fixture	1 piece	N1615-1	\$2.50	

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyao Street, Baoan District, Shenzhen(518108)

<https://www.topleprofile.com>

Silicone neon light with 3020 front light-emitting IP67---constant voltage technology











product features:

Silicone neon light with 3020 front light-emitting IP67, DC24V, vertical bending, positive outlet mode; The bending diameter is 200mm, the section size: 30mm*20mm/(W*H), IP67 waterproof level; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M	Unit price (usd/m)
1	N3020V24-C21	2100K	2000-2200K	50mm	>90	DC24V	16	836.9	5	
							20	1017	5	
							24	1196	5	
2	N3020V24-C24	2400K	2300-2500K	50mm	>90	DC24V	16	855.5	5	
							20	1040.6	5	
							24	1226	5	
3	N3020V24-C27	2700K	2600-2800K	50mm	>90	DC24V	16	991	5	
							20	1209.6	5	
							24	1426	5	
4	N3020V24-C30	3000K	2900-3100K	50mm	>90	DC24V	16	1001	5	
							20	1222	5	
							24	1439	5	
5	N3020V24-C35	3500K	3400-3700K	50mm	>90	DC24V	16	925.7	5	
							20	1129.4	5	
							24	1333	5	
6	N3020V24-C40	4000K	3800-4300K	50mm	>90	DC24V	16	1050	5	
							20	1280	5	
							24	1511	5	
7	N3020V24-C50	5000K	4800-5300K	50mm	>90	DC24V	16	1067	5	
							20	1298	5	
							24	1534	5	
8	N3020V24-C60	6000K	5900-6400K	50mm	>90	DC24V	16	962.6	5	
							20	1176	5	
							24	1390	5	
9	N3020V24-Cr	red	620-625nm	50mm	--	DC24V	16	435.4	5	
							20	530	5	
							24	617.5	5	
10	N3020V24-Cg	green	515-525nm	50mm	--	DC24V	16	1071	5	
							20	1243	5	
							24	1445	5	
11	N3020V24-Cb	blue	460-465nm	50mm	--	DC24V	16	221.7	5	
							20	268.2	5	
							24	314.3	5	
12	N3020V24-Cy	yellow	585-595nm	50mm	--	DC24V	16	352.8	5	
							20	338	5	
							24	367.8	5	
13	N3020V24-Cp	Pink	/	50mm	--	DC24V	16	431.3	5	
							20	518.8	5	
							24	613.2	5	
14	N3020V24-Ca	CCT color temperature (2200+6000K)	WW:2000-2300K	41.66mm	>90	DC24V	16	1008	5	
			W:5600-6300K				20	1232.8	5	
			W+WW:3600-4200K				24	1457	5	
15	N3020V24-Crgb	RGB	Red:620-625nm	41.66mm	--	DC24V	16	461.3	5	
			Green:515-525nm				20	536	5	
			Blue:460-465nm				24	614	5	

16	N3020V24-Crgbw	RGB+2700K	2200-2600K	41.66mm	--	DC24V	16	588.6	5	
							20	717.8	5	
							24	836.8	5	
		RGB+3000K	2500-2900K				16	607.8	5	
							20	741.4	5	
							24	863	5	
		RGB+4000K	3400-4000K				16	588.5	5	
							20	723.8	5	
							24	839.5	5	
		RGB+6000K	5000-5800K				16	591.3	5	
							20	719.8	5	
							24	840.7	5	

Accessories


Name	description	Model	unit price	Photos
Aluminum profile	1m/bar aluminum profile (33*20*1000mm)	N3020-AP	\$2.50	
Install the buckle	Installation buckle: 1 pack = 1 buckle (33*20*20mm) + 1 screw	N3020-MC	\$0.20	
"IP67 plug 2 core single color"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N3020-NCC2	\$0.40	
"IP67 plug 3-core color temperature"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N3020-NCC3	\$0.48	
"IP67 plug 4-pin RGB"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N3020-NCC4	\$0.55	
"IP67 plug 4-pin RGBW"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N3020-NCC5	\$0.63	
IP67 tail plug	1 silicone plug	N3020-CEC	\$0.20	
scissors	1 piece	S-1	\$15.00	

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)

<https://www.topedprofile.com>

Silicone neon lights with 2016 front light-emitting IP67---constant voltage technology



product features:








Silicone neon lights with 2016 front light-emitting IP67, DC24V, vertical bending, positive outlet mode;

The bending diameter is 200mm, the section size: 20mm*16mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade	Unit price (usd/m)
1	N2016V24-C21	2100K	2000-2200K	50mm	>90	DC24V	12	608	5	
							16	792	5	
							20	942	5	
2	N2016V24-C24	2400K	2300-2500K	50mm	>90	DC24V	12	651	5	
							16	837	5	
							20	1010	5	
3	N2016V24-C27	2700K	2600-2800K	50mm	>90	DC24V	12	733	5	
							16	945	5	
							20	1136	5	
4	N2016V24-C30	3000K	2900-3100K	50mm	>90	DC24V	12	724	5	
							16	937	5	
							20	1119	5	
5	N2016V24-C35	3500K	3400-3700K	50mm	>90	DC24V	12	680	5	
							16	886	5	
							20	1058	5	
6	N2016V24-C40	4000K	3800-4300K	50mm	>90	DC24V	12	783	5	
							16	1009	5	
							20	1220	5	
7	N2016V24-C50	5000K	4800-5300K	50mm	>90	DC24V	12	773	5	
							16	997	5	
							20	1207	5	
8	N2016V24-C60	6000K	5900-6400K	50mm	>90	DC24V	12	767	5	
							16	999	5	
							20	1185	5	
9	N2016V24-Cr	red	620-625nm	50mm	--	DC24V	12	335	5	
							16	458	5	
							20	524	5	
10	N2016V24-Cg	green	515-525nm	50mm	--	DC24V	12	788	5	
							16	973	5	
							20	1134	5	

11	N2016V24-Cb	blue	460-465nm	50mm	--	DC24V	12	169	5	
							16	214	5	
							20	262	5	
12	N2016V24-Cy	yellow	585-595nm	50mm	--	DC24V	12	270	5	
							16	335	5	
							20	344	5	
13	N2016V24-Cp	Pink	/	50mm	--	DC24V	12	325	5	
							16	412	5	
							20	502	5	
14	N2016V24-Ca	CCT color temperature (2200+6000K)	WW:2000-2300K	50mm	>90	DC24V	12	785	5	
			W:5600-6300K				16	1013	5	
			W+WW:3600-4200K				20	1258	5	
15	N2016V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	12	360.2	5	
			Green:515-525nm				16	449.4	5	
			Blue:460-465nm				20	518.4	5	
16	N2016V24-Crgbw	RGB+2700K	2200-2600K	62.5mm	--	DC24V	12	461.6	5	
							16	617	5	
							20	711.5	5	
		RGB+3000K	2500-2900K				12	492.3	5	
							16	653.7	5	
							20	760.2	5	
		RGB+4000K	3400-4000K				12	473.5	5	
							16	626.2	5	
							20	734.7	5	
		RGB+6000K	5000-5800K				12	479.6	5	
							16	635.1	5	
							20	739.6	5	

Accessories

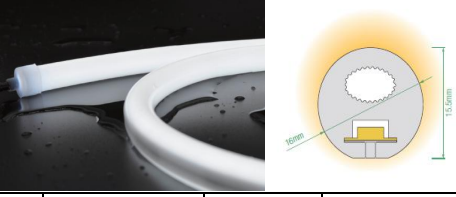
Name	description	Model	unit price	Photos
Aluminum profile	1m/bar aluminum profile (23*17.2*1000mm)	N2016-AP	\$2.05	
Install the buckle	Installation buckle: 1 pack = 1 buckle (23*17.2*20mm) + 1 screw	N2016-MC	\$0.18	
"IP67 plug 2 core single color"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N2016-NCC2	\$0.35	
"IP67 plug 3-core color"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N2016-NCC3	\$0.43	
"IP67 plug 4-pin RGB"	1 pack = 1 silicone plug + 1x 30cm PVC black wire (only positive)	N2016-NCC4	\$0.50	
IP67 tail plug	1 silicone plug	N2016-CEC	\$0.15	
scissors	1 piece	S-1	\$15.00	

Shenzhen TLP Electronics Co.,Ltd


No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyao Street, Baoan District, Shenzhen(518108)

<https://www.topedprofile.com>

Silicone neon light with D16 front light-emitting IP67---constant voltage technology

		<p>product features: Silicone neon light with D16 front light-emitting IP67, DC24V, vertical bending, 1 outlet method; The bending diameter is 200mm, the section size: 16mm/(diameter), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;</p>								
No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M	Unit price (usd/m)
1	ND16V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	284	5	
							10	558	5	
2	ND16V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	306	5	
							10	591	5	
3	ND16V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	340	5	
							10	663	5	
4	ND16V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	338	5	
							10	653	5	
5	ND16V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	324	5	
							10	626	5	
6	ND16V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	365	5	
							10	707	5	
7	ND16V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	374	5	
							10	734	5	
8	ND16V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	378	5	
							10	735	5	
9	ND16V24-Cr	red	620-625nm	50mm	--	DC24V	5	139	5	
							10	305	5	
10	ND16V24-Cg	green	515-525nm	50mm	--	DC24V	5	408	5	
							10	778	5	
11	ND16V24-Cb	blue	460-465nm	50mm	--	DC24V	5	85	5	
							10	155	5	
12	ND16V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	112	5	
							10	235	5	
13	ND16V24-Cp	pink	/	50mm	--	DC24V	5	156	5	
							10	328	5	
14	ND16V24-Ca	CCT color temperature	WW:2000-2300K	50mm	>90	DC24V	5	352	5	
			W:5600-6300K				10	726	5	
15	ND16V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	199	5	
			Green:515-525nm				10	344	5	

Accessories


Model	unit price	Photos		
ND16-AP	\$0.75			
ND16-MC	\$0.18			
ND16-NCC2	\$0.35			
ND16-NCC3	\$0.43			
ND16-NCC4	\$0.50			
ND16-CEC	\$0.18			
S-1	\$15.00			

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyao Street, Baoan District, Shenzhen(518108)

<https://www.topedprofile.com>

Silicone neon light with 0612 mini side-emitting IP67--constant voltage technology










product features:

Silicone neon light with 0612 mini side light-emitting IP67, DC24V, horizontal bending, three outlet methods: front/side out/bottom out; The bending diameter is 50mm, the section size: 6mm*12mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade	Unit price (usd/m)
1	N0612V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	145	5	
							10	246	5	
2	N0612V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	173	5	
							10	312	5	
3	N0612V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	178	5	
							10	353	5	
4	N0612V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	154	5	
							10	299	5	
5	N0612V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	169	5	
							10	327	5	
6	N0612V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	186	5	
							10	360	5	
7	N0612V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	187	5	
							10	360	5	
8	N0612V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	190	5	
							10	359	5	
9	N0612V24-Cr	red	620-625nm	50mm	--	DC24V	5	82	5	
							10	160	5	
10	N0612V24-Cg	green	515-525nm	50mm	--	DC24V	5	240	5	
							10	398	5	
11	N0612V24-Cb	blue	460-465nm	50mm	--	DC24V	5	29.7	5	
							10	51.6	5	
12	N0612V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	61.4	5	
							10	125	5	
13	N0612V24-Cp	pink	/	50mm	--	DC24V	5	78	5	
							10	144.6	5	
14	N0612V24-Ca	CCT color temperature	WW:2000-2300K	50mm	>90	DC24V	5	158	5	
			W:5600-6300K				10	269	5	
15	N0612V24-Crgb	RGB	Red:620-625nm	50mm	--	DC24V	5	73	5	
			Green:515-525nm				10	126.6	5	
			Blue:460-465nm							

Accessories


Model	unit price	Photos		
N0612-AP	\$1.00			
N0612-MC	\$0.13			
N0612-NCC2	\$0.33			
N0612-NCC3	\$0.40			
N0612-NCC4	\$0.48			
N0612-CEC	\$0.10			
S-1	\$15.00			

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyao Street, Baoan District, Shenzhen(518108)

<https://www.topedprofile.com>

Silicone neon light with 1220 side light IP67--constant voltage technology



product features:

Silicone neon light with 1220 side light-emitting IP67, DC24V, horizontal bending, three outlet modes: front/side/bottom out;

The bending diameter is 200mm, the section size: 12mm*20mm/(W*H), IP67 waterproof rating;

Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;





Unique plug design, this plug can be quickly and easily installed to meet the needs of different lengths, without welding wires and waterproofing;

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	lumina nce LM	Maximum cascade length M	Unit price (usd/m)
1	N1220V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	131.7	5	
							10	258.7	5	
							15	360.9	5	
2	N1220V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	150.4	5	
							10	293	5	
							15	410.1	5	
3	N1220V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	152.7	5	
							10	303.2	5	
							15	431.7	5	
4	N1220V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	156.7	5	
							10	307.2	5	
							15	432.3	5	
5	N1220V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	176.9	5	
							10	345.1	5	
							15	475.4	5	
6	N1220V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	170.1	5	
							10	335.6	5	
							15	470.1	5	
7	N1220V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	170	5	
							10	329.4	5	
							15	461.8	5	
8	N1220V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	168.2	5	
							10	328.3	5	
							15	465.1	5	
9	N1220V24-Cr	red	620-625nm	50mm	--	DC24V	5	73.8	5	
							10	155.4	5	
							15	204.7	5	
10	N1220V24-Cg	green	515-525nm	50mm	--	DC24V	5	198.2	5	
							10	372.6	5	
							15	473.2	5	
11	N1220V24-Cb	blue	460-465nm	50mm	--	DC24V	5	35.2	5	
							10	69.8	5	
							15	93.3	5	
12	N1220V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	15.5	5	
							10	30.4	5	
							15	40.8	5	
13	N1220V24-Cp	Pink	/	50mm	--	DC24V	5	74.6	5	
							10	148.2	5	
							15	199	5	

14	N1220V24-Ca	CCT color temperature (2200+6000 K)	WW:2000-2300K	50mm	>90	DC24V	5	167.4	5
			W:5600-6300K				10	353.5	5
			W+WW:3600-4200				15	476.3	5
15	N1220V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	86.1	5
			Green:515-525nm				10	160.2	5
			Blue:460-465nm				15	200.3	5
16	N1220V24-Crgbw	RGB+2700K	2200-2600K	62.5mm	--	DC24V	5	110.7	5
							10	211.2	5
							15	301.8	5
		RGB+3000K	2400-3000K				5	109.3	5
							10	219	5
							15	305.4	5
		RGB+4000K	3400-4000K				5	109.7	5
							10	210.5	5
							15	303	5
		RGB+6000K	5000-5600K				5	104.6	5
							10	197.5	5
							15	278	5

Accessories

Model	unit price	Photos		
N1220-AP	\$2.25			
N1220-MC	\$0.18			
N1220-NCC2	\$1.13			
N1220-NCC3	\$1.25			
N1220-NCC4	\$1.38			
N1220-NCC5	\$1.50			
N1220-CEC	\$0.75			
N1220-MF2	\$2.05			
N1220-MF3	\$2.38			
N1220-MF4	\$3.00			
N1220-MF5	\$3.13			
N1220-C2	\$0.45			
N1220-C3	\$0.58			



N1220-C4	\$0.65			
N1220-C5	\$0.75			
S-1	\$15.00			
N1220-1	\$2.50			


Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)

<https://www.topedprofile.com>

Silicone neon light with 1018 side light IP67---constant voltage technology

 		product features: Silicone neon light with 1018 side light-emitting IP67, DC24V, horizontal bending, three outlet modes: front/side out/bottom out; The bending diameter is 200mm, the section size: 10mm*18mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;								
No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M	
1	N1018V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	141.4	5	
							10	276.4	5	
							15	375.9	5	
2	N1018V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	138.7	5	
							10	273.3	5	
							15	371.5	5	
3	N1018V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	160.4	5	
							10	312.6	5	
							15	421.9	5	
4	N1018V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	163.4	5	
							10	328.4	5	
							15	441.3	5	
5	N1018V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	170.3	5	
							10	327	5	
							15	452.6	5	
6	N1018V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	178.4	5	
							10	356	5	
							15	484.1	5	
7	N1018V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	180.3	5	
							10	346	5	
							15	483.9	5	
8	N1018V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	177.2	5	
							10	353.9	5	
							15	468.5	5	
9	N1018V24-Cr	red	620-625nm	50mm	--	DC24V	5	67.7	5	
							10	145.2	5	
							15	192.2	5	
10	N1018V24-Cg	green	515-525nm	50mm	--	DC24V	5	195	5	
							10	369.2	5	
							15	466	5	
11	N1018V24-Cb	blue	460-465nm	50mm	--	DC24V	5	34.7	5	
							10	64.6	5	
							15	92.7	5	
12	N1018V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	14.6	5	
							10	30	5	
							15	37.4	5	



13	N1018V24-Cp	Pink	/	50mm	--	DC24V	5	74.3	5
							10	148.7	5
							15	195.8	5
14	N1018V24-Ca	CCT color temperature (2200+6000K)	WW:2000-2300K	50mm	>90	DC24V	5	160.8	5
			W:5600-6300K				10	337	33.7
			W+WW:3600-4200K				15	451.8	30.1
15	N1018V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	77.4	5
			Green:515-525nm				10	152.4	5
			Blue:460-465nm				15	180.2	5
Model		unit price	Photos						
N1018-AP		\$1.63							
N1018-MC		\$0.15							
N1018-NCC2		\$0.35							
N1018-NCC3		\$0.43							
N1018-NCC4		\$0.50							
N1018-CEC		\$0.18							
S-1		\$15.00							

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)






<https://www.topedprofile.com>

Silicone neon light with 0408 side light IP67--constant voltage technology

		<p>product features: Silicone neon light with 0408 mini side light-emitting IP67, DC24V, horizontal bending, 1 outlet method; The bending diameter is 30mm, the section size: 4mm*8mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;</p>
--	---	---

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	lumina nce LM	Maximu m cascade
1	N0408V24-C21	2100	2000-2300K	25	>90	DC24V	6	199	5
2	N0408V24-C24	2400	2300-2600K	25	>90	DC24V	6	212	5
3	N0408V24-C26	2600	2400-2800K	25	>90	DC24V	6	219	5
4	N0408V24-C30	3000	2800-3300K	25	>90	DC24V	6	253	5
5	N0408V24-C35	3500	3200-3900K	25	>90	DC24V	6	223	5
6	N0408V24-C42	4200	3900-4600K	25	>90	DC24V	6	214	5
7	N0408V24-C53	5300	5000-5700K	25	>90	DC24V	6	221	5

Accessories

Model	unit price	Photos
N0408-AP	\$1.00	
N0408-MC	\$0.15	
N0408-NCC2	\$0.25	
N0408-CEC	\$0.10	
S-1	\$15.00	

Shenzhen TLP Electronics Co.,Ltd


No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyao Street, Baoan District, Shenzhen(518108)







<https://www.topedprofile.com>

Silicone neon light with 0817 side light IP67---constant voltage technology

		<p>product features: Silicone neon lights with 0817 side light-emitting IP67, DC24V, horizontally curved, one outlet method is in front; The bending diameter is 100mm, the section size: 8mm*17mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;</p>							
No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M
1	N0817V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	142	5
							10	271	5
2	N0817V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	148	5
							10	285	5
3	N0817V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	159	5
							10	310	5
4	N0817V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	160	5
							10	311	5
5	N0817V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	167	5
							10	323	5
6	N0817V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	174	5
							10	340	5
7	N0817V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	175	5
							10	344	5
8	N0817V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	166	5
							10	319	5
9	N0817V24-Cr	red	620-625nm	50mm	--	DC24V	5	70	5
							10	150	5
10	N0817V24-Cg	green	515-525nm	50mm	--	DC24V	5	190	5
							10	356	5
11	N0817V24-Cb	blue	460-465nm	50mm	--	DC24V	5	38	5
							10	71	5
12	N0817V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	59	5
							10	116	5
13	N0817V24-Cp	pink	/	50mm	--	DC24V	5	74	5
							10	148	5
14	N0817V24-Ca	CCT color temperature	WW:2000-2300K	50mm	>90	DC24V	5	161	5
			W:5600-6300K				10	332	5
15	N0817V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	82	5
			Green:515-525nm Blue:460-465nm				10	144	5

Accessories

Model	unit price	Photos
N0817-AP	\$1.50	

N0817-MC	\$0.18			
N0817-NCC2	\$0.35			
N0817-NCC3	\$0.43			
N0817-NCC4	\$0.50			
N0817-CEC	\$0.18			
S-1	\$15.00			

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)





<https://www.topedprofile.com>

Silicone neon light with 1023 side light IP67---constant voltage technology

		product features: Silicone neon light with 1023 side light-emitting IP67, DC24V, horizontal bending, 1 outlet method; The bending diameter is 150mm, the section size: 10mm*23mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;								
No	Model	Color	color range	Minimum cutting length	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M	
1	N1023V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	160	5	
							10	310	5	
							15	433	5	
2	N1023V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	167	5	
							10	322	5	
							15	454	5	
3	N1023V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	179	5	
							10	349	5	
							15	491	5	
4	N1023V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	175	5	
							10	345	5	
							15	478	5	
5	N1023V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	194	5	
							10	381	5	
							15	534	5	
6	N1023V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	197	5	
							10	387	5	
							15	542	5	
7	N1023V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	191	5	
							10	376	5	
							15	531	5	
8	N1023V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	179	5	
							10	350	5	
							15	500	5	
9	N1023V24-Cr	red	620-625nm	50mm	--	DC24V	5	69	5	
							10	148	5	
							15	197	5	
10	N1023V24-Cg	green	515-525nm	50mm	--	DC24V	5	213	5	
							10	404	5	
							15	513	5	
11	N1023V24-Cb	blue	460-465nm	50mm	--	DC24V	5	40	5	
							10	74	5	
							15	103	5	
12	N1023V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	63	5	
							10	125	5	
							15	156	5	

13	N1023V24-Cp	Pink	/	50mm	--	DC24V	5	81	5	
							10	162	5	
							15	218	5	
14	N1023V24-Ca	CCT color temperature (2200+6000 K)	WW:2000-2300K	50mm	>90	DC24V	5	175	5	
			W:5600-6300K				10	362	5	
			W+WW:3600-4200K				15	509	5	
15	N1023V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	78	5	
			Green:515-525nm				10	145	5	
			Blue:460-465nm				15	181	5	

Accessories


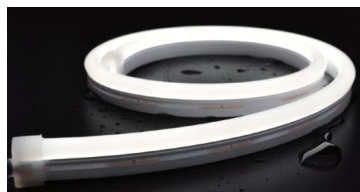
Model	unit price	Photos		
N1023-AP	\$1.75			
N1023-MC	\$0.18			
N1023-NCC2	\$0.35			
N1023-NCC3	\$0.43			
N1023-NCC4	\$0.50			
N1023-CEC	\$0.18			
S-1	\$15.00			

Shenzhen TLP Electronics Co.,Ltd

No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)

<https://www.topedprofile.com>

Silicone neon light with 1225 side light IP67---constant voltage technology











product features:
 Silicone neon light with 1225 side light-emitting IP67, DC24V, horizontal bending, 1 outlet method;
 The bending diameter is 150mm, the section size: 12mm*25mm/(W*H), IP67 waterproof rating;
 Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;

No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade length M
1	N1225V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	124	27
							10	237	17
							15	332	14
2	N1225V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	139	27
							10	270	17
							15	382	14
3	N1225V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	146	27
							10	286	17
							15	400	14
4	N1225V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	144	27
							10	286	17
							15	395	14
5	N1225V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	153	27
							10	304	17
							15	428	14
6	N1225V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	160	27
							10	318	17
							15	441	14
7	N1225V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	153	27
							10	301	17
							15	423	14
8	N1225V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	159	27
							10	313	17
							15	436	14
9	N1225V24-Cr	red	620-625nm	50mm	--	DC24V	5	55.6	35
							10	123	23
							15	172	18
10	N1225V24-Cg	green	515-525nm	50mm	--	DC24V	5	181	27
							10	340.7	17
							15	426	14
11	N1225V24-Cb	blue	460-465nm	50mm	--	DC24V	5	32	27
							10	61.4	17
							15	85.7	14
12	N1225V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	49.6	35
							10	102.5	23
							15	126.7	18
13	N1225V24-Cp	Pink	/	50mm	--	DC24V	5	65.6	27
							10	131.7	17
							15	175.8	14

14	N1225V24-Ca	CCT color temperature (2200+6000K)	WW:2000-2300K	50mm	>90	DC24V	5	142	5
			W:5600-6300K				10	291	5
			W+WW:3600-4200K				15	403	5
15	N1225V24-Crgb	RGB	Red:620-625nm	62.5mm	--	DC24V	5	70.4	5
			Green:515-525nm				10	131.6	5
			Blue:460-465nm				15	161.2	5
16	N1225V24-Crgbw	RGB+2700K	2200-2600K	62.5mm	--	DC24V	5	83.4	5
							10	161.5	5
							15	226	5
		RGB+3000K	2500-2900K				5	90.6	5
							10	179.4	5
							15	255.2	5
		RGB+4000K	3400-4000K				5	92	5
							10	181.7	5
							15	253	5
		RGB+6000K	5000-5800K				5	91.7	5
							10	180.8	5
							15	254.7	5

Accessories



Model	unit price	Photos		
N1225-AP	\$2.00			
N1225-MC	\$0.20			
N1225-NCC2	\$0.35			
N1225-NCC3	\$0.43			
N1225-NCC4	\$0.50			
N1225-NCC5	\$0.58			
N1225-CEC	\$0.18			
S-1	\$15.00			

Shenzhen TLP Electronics Co.,Ltd



No. 2, Lane 6, Hebin Garden, Langxin Community, Shiyan Street, Baoan District, Shenzhen(518108)





<https://www.topedprofile.com>

Silicone neon light with positive side bend 1615 IP67---constant pressure technology

 				<p>product features: Silicone neon light with 1225 side light-emitting IP67, DC24V, horizontal bending, 1 outlet method; The bending diameter is 150mm, the section size: 12mm*25mm/(W*H), IP67 waterproof rating; Yellowing resistance, UV resistance, salt and alkali resistance, high temperature resistance, uniform light emission, no light spots, can be shaped into different shapes, suitable for indoor and outdoor lighting;</p>						
No	Model	Color	color range	Minimum cutting length mm	CRI	Voltage V	Power W	luminance LM	Maximum cascade	
1	3DN1615V24-C21	2100K	2000-2200K	50mm	>90	DC24V	5	316.2	5	
							10	50	5	
2	3DN1615V24-C24	2400K	2300-2500K	50mm	>90	DC24V	5	330.5	5	
							10	50	5	
3	3DN1615V24-C27	2700K	2600-2800K	50mm	>90	DC24V	5	357.2	5	
							10	50	5	
4	3DN1615V24-C30	3000K	2900-3100K	50mm	>90	DC24V	5	371.7	5	
							10	50	5	
5	3DN1615V24-C35	3500K	3400-3700K	50mm	>90	DC24V	5	383.5	5	
							10	50	5	
6	3DN1615V24-C40	4000K	3800-4300K	50mm	>90	DC24V	5	384.9	5	
							10	50	5	
7	3DN1615V24-C50	5000K	4800-5300K	50mm	>90	DC24V	5	391.1	5	
							10	50	5	
8	3DN1615V24-C60	6000K	5900-6400K	50mm	>90	DC24V	5	387.5	5	
							10	50	5	
9	3DN1615V24-Cr	red	620-625nm	50mm	--	DC24V	5	151.3	5	
							10	50	5	
10	3DN1615V24-Cg	green	515-525nm	50mm	--	DC24V	5	320.5	5	
							10	50	5	
11	3DN1615V24-Cb	blue	460-465nm	50mm	--	DC24V	5	77.58	5	
							10	50	5	
12	3DN1615V24-Cy	yellow	585-595nm	50mm	--	DC24V	5	128.3	5	
							10	50	5	
13	3DN1615V24-Cp	pink	/	50mm	--	DC24V	5	255.6	5	
							10	50	5	

Accessories

Model	unit price	Photos
3DN1615-AP	\$2.25	
3DN1615-MC	\$0.18	

3DN1615-NCC2	\$0.33			
3DN1615-MF2	\$2.05			
3DN1615-C2	\$0.45			
S-1	\$15.00			
3DN1615-1	\$2.50	