


360° EMITTING SILICONE NEON STRIP


Model: NR25



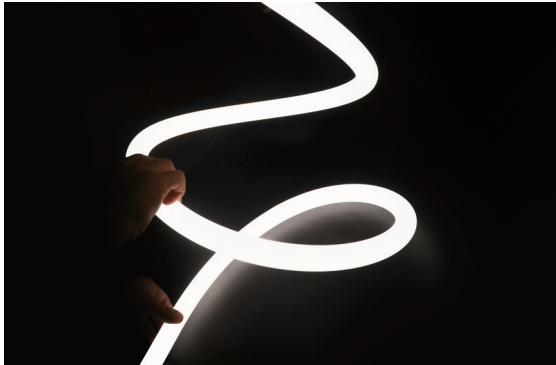


Product Feature

- Unique optical light distribution structure design, 360° emitting uniform without shadow.
- IP65 protection level with integrated extrusion molding process, high light transmittance, environment-friendly silicone material.
- Excellent toughness, stylish appearance, elegant design
- Salt resistance, acid & alkali corrosion resistance, UV and fire resistance.
- Ambient temperature: -25°C~60°C; Storage temperature: 0°C~60°C.





Diameter





Minimum bending diameter

Front entry Integral End cap (IP65)

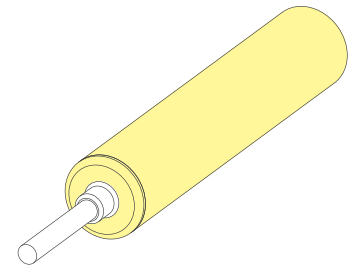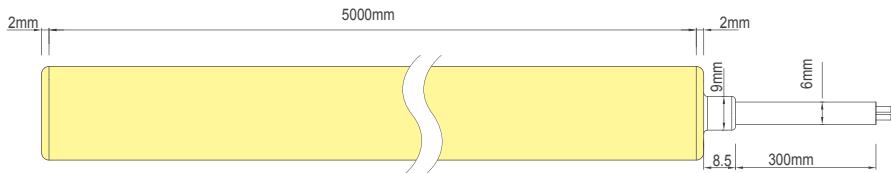



Cable entry: Front

Side entry Integral End Cap (IP65)

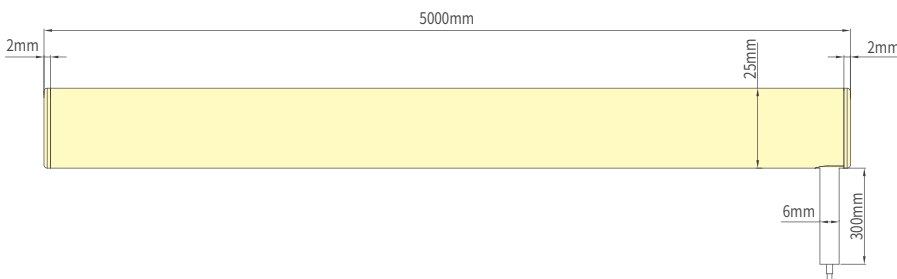

Side outlet

Silicone End Cap(IP65)

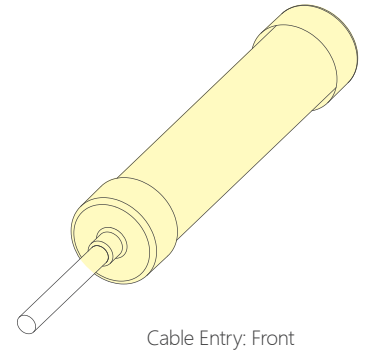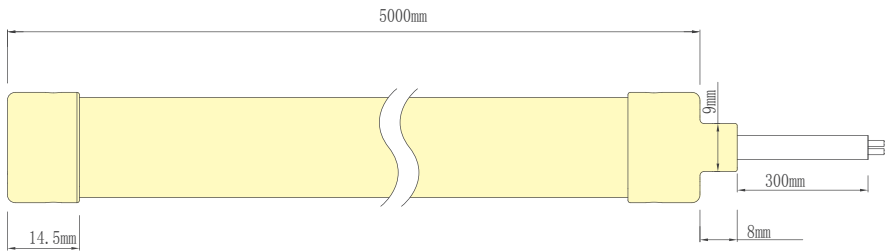

Cable Entry: Front





The Head



The End

Metal End Cap(IP65)

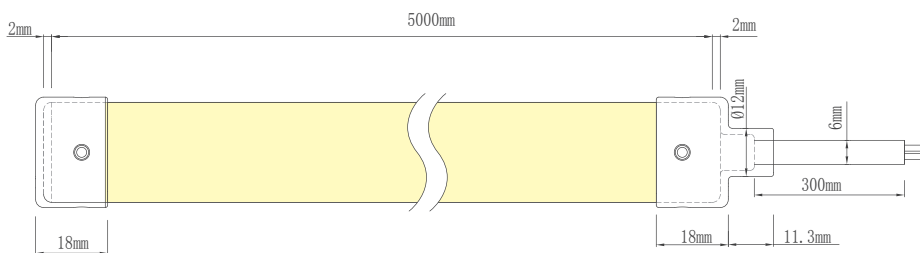

Cable Entry: Front



The Head



The End



The metal guard coil is unavailable if fitted the metal end cap

Photoelectric parameters (5W)

Power (W)	CCT	Lumens (LM/M)	Efficacy (LM/W)	Voltage (v)	CRI (Ra)	Unit cut (mm)	Max. productive length (M)
Single color 5W	2400±100	272	56	24	90	/	5M
	2700±100	276	55				
	3000±100	284	27				
	3500±200	306	61				
	4000±300	298	59				
	5000±300	309	62	24	/	/	5M
	6000±300	302	60				
	R: 620-630nm	114	23				
	G: 520-530nm	289	58				
	B: 465-475nm	61	12				
Y: 585-595nm	97	19	24	/	/	5M	
Pink	210	42					
2700 (WW)	124	49					
5000 (W)	127	50					
3500 (WW+W)	250	50	24	/	/	5M	
R: 620-630nm	27	15					
G: 520-530nm	98	57					
B: 465-475nm	16	9					
RGB 5W	RGB	144	29				


Photoelectric parameters (10W)

Power (W)	CCT	Lumens (LM/M)	Efficacy (LM/W)	Voltage (v)	CRI (Ra)	Unit cut (mm)	Max. productive length (M)
Single color 10W	2400±100	525	53	24	90	/	5M
	2700±100	517	52				
	3000±100	529	53				
	3500±200	600	60				
	4000±300	556	55				
	5000±300	604	60				
	6000±300	586	58				
	R: 620-630nm	246	25				
	G: 520-530nm	502	50				
	B: 465-475nm	114	11				
Y: 585-595nm	209	21	24	/	/	5M	
Pink	409	41					
Tunable white 10W	2700 (WW)	258					50
	5000 (W)	262					50
	3500 (WW+W)	517					50
RGB 10W	R: 620-630nm	56					16
	G: 520-530nm	162					47
	B: 465-475nm	26					7
	RGB	248					24


Photoelectric parameters (RGBW 16W)

Power (W)	CCT	Lumens (LM/M)	Efficacy (LM/W)	Voltage (v)	CRI (Ra)	Unit cut (mm)	Max. productive length (M)
RGB	R: 620-630nm	58	15	24	/	/	5M
	G: 520-530nm	194	49				
	B: 465-475nm	32	8				
W	RGB	281	23	24	90	/	5M
	2200±100K	200	50				
	2700±100K	219	55				
	3200±200K	224	56				
	4500±300K	226	56				
	5500±300K	237	59				
	6500±500K	229	57				

Light distribution curve

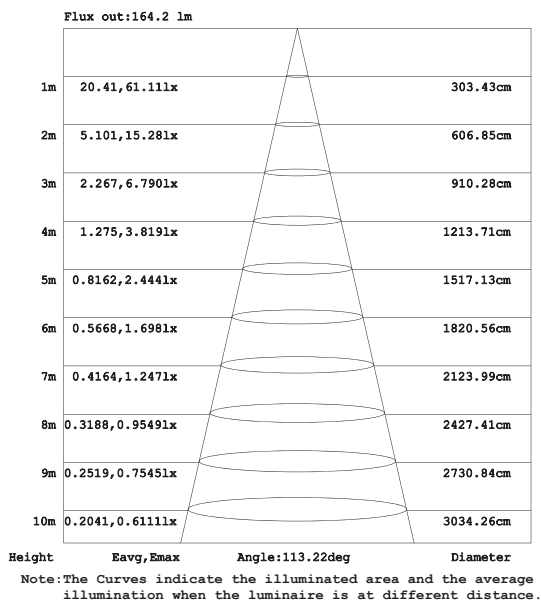

Effective average illumination

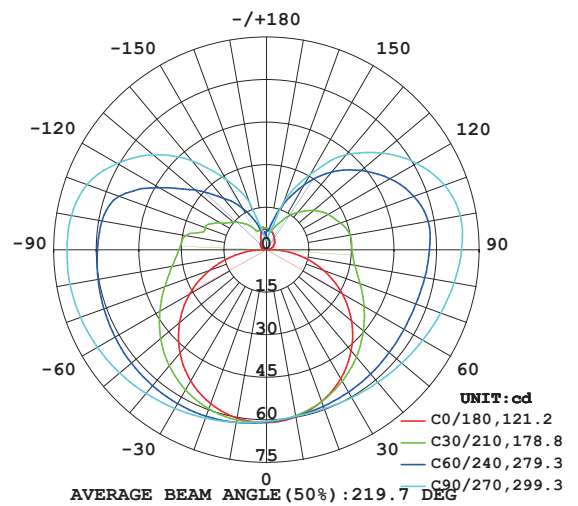

Light distribution curve

Note: The above data is based on the test results of the single white 3000K led strip.


Product accessories



PC Profile
Material: PC
Color: Transparent
Size: 25x30x1000mm
Noted: With screws, plastic plugs, hanging rope



PC Profile
Material: PC
Color: Transparent
Size: 25x30x1000mm
Noted: With screws, plastic plugs, hanging rope

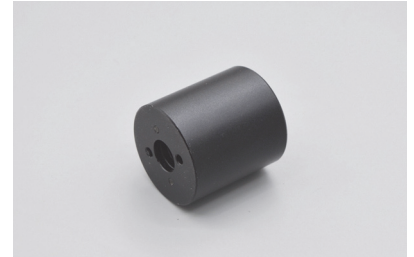

Lift Fixtures A
Material: Aluminum Alloy
Color: Black
Size: \varnothing 38x41mm
Noted: With screws, plastic plugs



Lift Fixtures B (For single color product use ONLY)
Material: Aluminum Alloy
Color: Black
Size: \varnothing 35x92mm
Noted: With screws, plastic plugs



Connector for Side outlet
Material: Aluminum Alloy
Color: Black
Size: \varnothing 27.6x37mm
Noted: With screws



Connector
Material: Aluminum Alloy
Color: Black
Size: \varnothing 27.6x37mm
Noted: With screws




U-shaped Lift Fixtures
Material: Aluminum Alloy
Color: Black
Size: \varnothing 38x41mm
Noted: With screws, plastic plugs




Hanging Rope
Material: Stainless Steel
Color: Stainless steel natural color
Size: \varnothing 1.5x1000mm
Noted: With screws, plastic plugs

Installation method

U-shaped Lifting

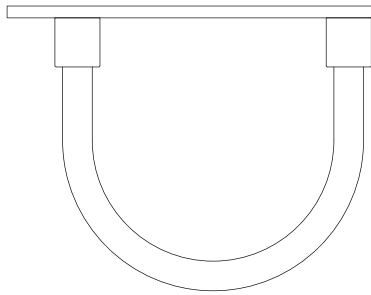


Vertical Lifting A




Vertical Lifting B




Horizontal Lifting

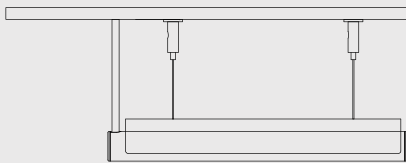


Surface Installation




S-shaped Lifting

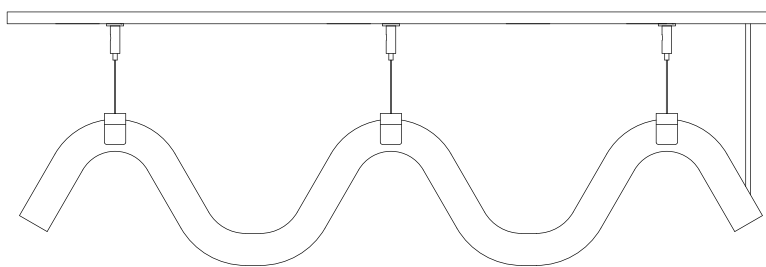

Connection diagram for single color light

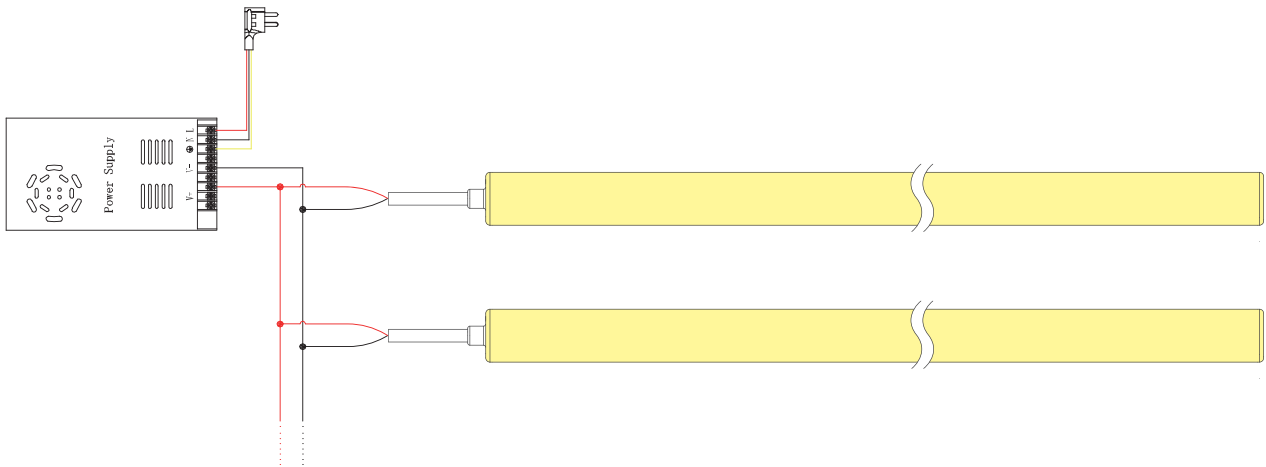


Connection diagram for tunable white light

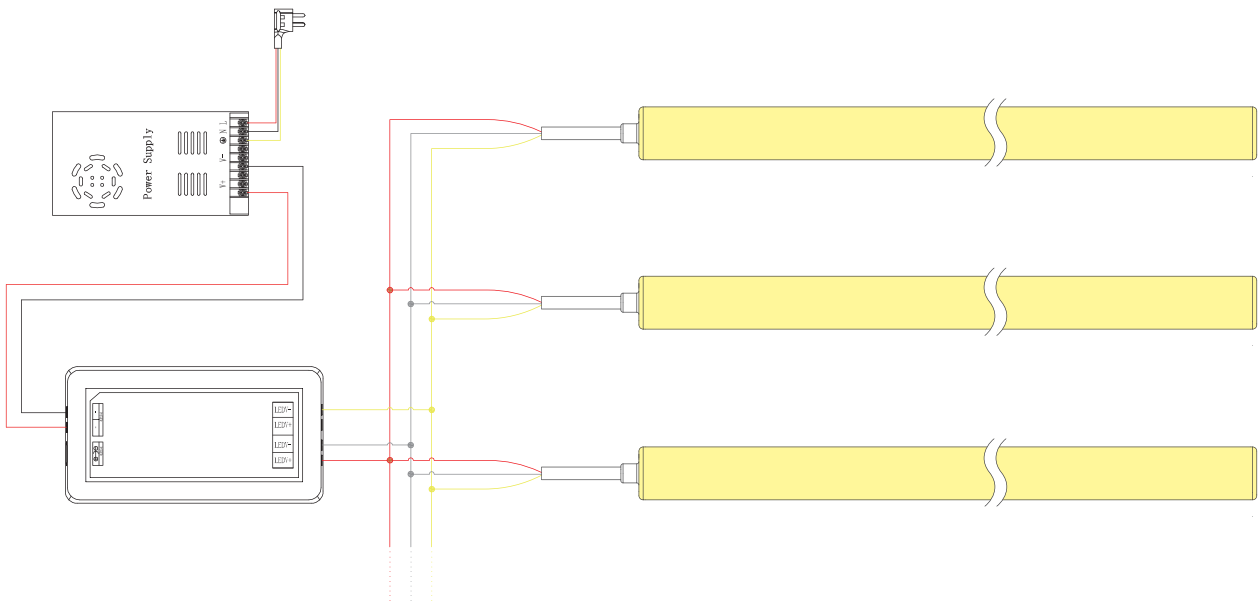


Installation/Use Precautions

- ◆ The unopened products and the unused products after unpacking, should be sealed in packaging bags to avoid long-term exposure.
- ◆ Please use DC24V isolated constant voltage switching power supply with ripple voltage less than 5%. Other types of power supply may damage the product or cause other safety risks.
- ◆ In practical application, the power supply should be retained with a 20% allowance (it is recommended to use only 80% power of the power supply) to ensure the stability of the power supply.
- ◆ Professional operators are recommended to wire and connect the power supply. It is strictly prohibited to connect the power supply with electricity in case of electric shock.
- ◆ Please confirm whether the voltage of the power supply is consistent with the voltage of the product before wiring.
- ◆ Please note the positive and negative sides of the power cord and connect them properly.
- ◆ When using multiple power supply, the situation of parallel connection of the positive pole of the power supply should be avoided. It will lead to instability of the power supply system and damage to the product after long-term operation.
- ◆ If the actual length of the application exceeds the specified length, it will lead to the phenomenon of heating and uneven brightness of the strip due to overload.
- ◆ During installation, please avoid twisting or irregular bending of the strip, and avoid any operation that will scratch the strip, otherwise it may cause irreparable damage to the product.
- ◆ In order to ensure the life and reliability of the strip, please ensure that the diameter of the bending should be greater than 200mm.
- ◆ For the sake of eye protection, please avoid looking directly at the illuminated surface for a long time.
- ◆ Non-professionals are strictly prohibited from installing, disassembling or repairing the strip.
- ◆ Do not use any acid or alkaline adhesive to fix the strip (including but not limited to glass glue, etc.)
- ◆ Different levels of waterproof, different use environment. IP65 is not suitable for immersion application.
- ◆ Due to structural differences, the final visual color of the strip will be slightly different for products of different sizes and specifications under the same color temperature value.
- ◆ Due to the difference in structure, the same color temperature value, different size/specification of the strip, their final visual color will be slightly different. Please make confirmation before use.
- ◆ It is forbidden to cut this product to avoid damage to the strip due to improper operation.
- ◆ Customers are not allowed to cut this product by themselves.

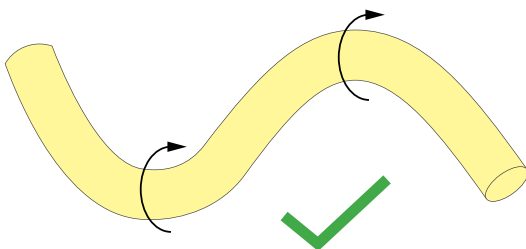


Bending diameter must be greater than 200mm

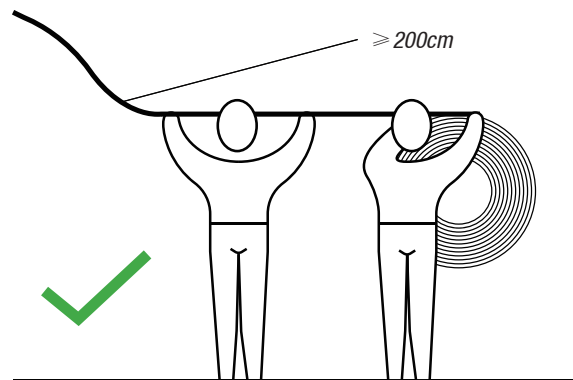


When the length of the strip is longer than 2 meters, have two people work together to install it.

Installation/Use Precautions

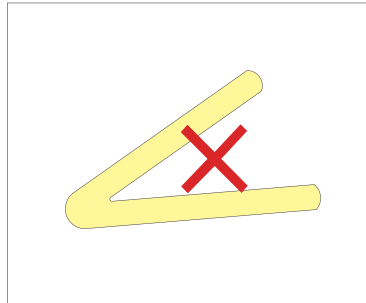

Small Angle bending is prohibited



Prohibit trample

Tests show that formaldehyde and benzene substances will make silicone products yellowing.

If the silicone products are used in the indoor environment of new decoration, epoxy floor paint, wall paint, wallpaper adhesive, all kinds of decoration materials, or new furniture, are likely to release formaldehyde and benzene substances. In order to avoid silicone material affected, it is suggested that the use of the environment after the completion of the new decoration, formaldehyde and benzene should be removed first, or it should be ventilated for a period of time before installing the strip.