



Miézo is an electronics company that specializes in developing power supply, sensing technology and actuation behavior on variety of furniture.

Miézo is committed to making technology more accessible and more affordable for everyone. Our products are designed with the sole focus on user experience, simple installation and safety.

We have applied a wide range of technologies on furniture, such as touch sensors, touch-less wipe sensors, proximity sensors, human body detection, LED lightings, power strips, wireless chargers, etc. These technologies enable users to use their furniture easily. To ensure safety, all Miézo electronic products meet the MET/UL or CE safety standards.

Miézo also provides customized services to develop new electronic products for furniture or other applications. All customers are welcomed to propose specific requirements, and we can build the products with unique features.

	Miézo	Other A	Other B
CORD LENGTH	3 Meter (9.84ft)	2-2.5 Meter (6.56ft-8.2ft)	2-2.5 Meter (6.56ft-8.2ft)
CORD GAUGE (AWG)	Outer : 14AWG (Copper diameter 2.08mm ²) Inner : 14AWG (Copper diameter 2.08mm ²) 1500W	Outer : 16AWG (Copper diameter 1.31mm ²) Inner : 18AWG (Copper diameter 0.82mm ²) 1250W	Outer : 16AWG (Copper diameter 1.31mm ²) Inner : ? 1500W
FUSE	Yes (2 Fuses)	?	?
LIQUID DRAINING DESIGN	Yes (Draining holes)	No	No
CORD HOLDING DESIGN	Yes	No	Yes
CERTIFICATION	MET	?	?
HIGH/LOW VOLTAGE ISOLATION	Yes	No	No
RISK	Low	High	High



CORD GAUGE (AWG)

AWG(American wire gauge) is the standard for copper diameter in wiring. The smaller number represents a thicker copper diameter and allows higher currency (Amp).
If the wire used does not reach the AWG for rating loading, the wire will be heated. This imposes huge risk EVEN when users use the products within rating load. UL 962A regulates the AWG needed for different rating currency.

FUSE

A small safety part in an electrical device or piece of machinery that causes it to stop working if the electric current is too high, and so prevents fires or other dangers. For maximum safety for our users, Miezo's PDU series are all built with two fuses for both high voltage and low voltage power sockets. Any power delievery unit without a fuse can be highly risky as there will be no protection against power surges (when users apply loading exceed rating wattage).

LIQUID DRAINING DESIGN

Miezo's draining hole design can drain liquid inflow if user accidently pours liquid into the sockets. These draining holes also prevent eletronic parts from being soaked when liquid inflow. Lowering the risk of failure after liquid inflow.



CORD HOLDING DESIGN

Cord holding design can prevent damage to the inner circuit when a pulling force is applied to the outter cable. According to UL962A, FPDU products must sustain a pulling force of 35 pounds for 1 minute without causing damage to the outside cord or the inside wiring.

The damage to inner circuit caused by pulling the outter cord can hardly be observed until product failure .



HIGH/LOW VOLTAGE ISOLATION

Every Miezo's PDU products have the design of High/Low voltage isolation complying with the safety standards. In addition, the lower voltage unit is also covered with Mylar, a material commonly used for insulation.

Electronic devices without proper isolation for High and Low voltage have high risk of causing an electrical fire.



SAFETY

Home Safety and Protection Series 8

DL-01 DL-11

POWER

Extension AC + Type C Power Delivery 10

PD-131E-45W PD-121E-45W

Extension USB + Type C Series 11

TUM-11B TU-11E-20W TU-11E-30W TUM-11BL TU-11A-12W
TUS-11B TU-11S-20W TU-11S-30W TUS-11BL TU-11B-12W

Extension 2 Type C Series 16

TUM-02BL
TUS-02BL

Extension USB + Type C Series 17

PD-11S-30W
PD-11E-30W

Extension AC + Type C Power Delivery 18

PDU-111-00B PDU-221-00B
PDU-211-00B PDU-221U-00B
PDU-121-00B PDU-221U-01B

Wireless Charger Series 23

QI-00E-15W QI-11M-15W
QI-00G-15W

CONTROL UNIT

Rocker Switch 26

RS101

Touchless Switch 27

PIR-11U05
PIR-11V12

Touch Switch 28

LTS232V12
LTS232U05

LIGHTING

5V Puck Light 31

SU-30 LED-U30W-T LED-U01 LED-U31
SU-00 LED-U00 LED-U30

12V Puck Light 33

LED-V00 LED-V01 LED-V30 LED-V31

LED Strip Light 34

ADAPTER

Power Adapter 38

DC Adapter
PD Adapter

Scan to see FUrnITURE



www.miezo.com.tw



SAFETY

[Fingerprint Cabinet Lock with Key](#)

[Fingerprint Cabinet Lock](#)

DL-11


Fingerprint Cabinet Lock with Key

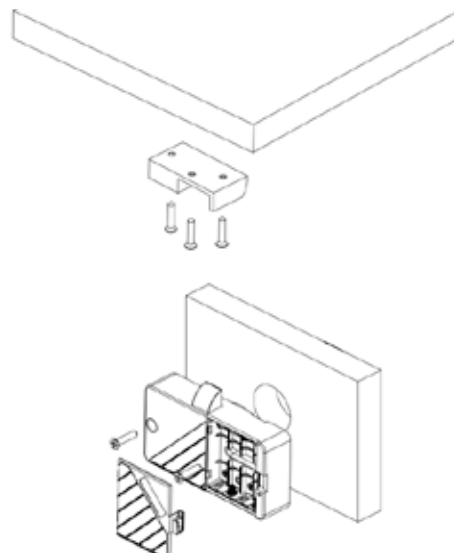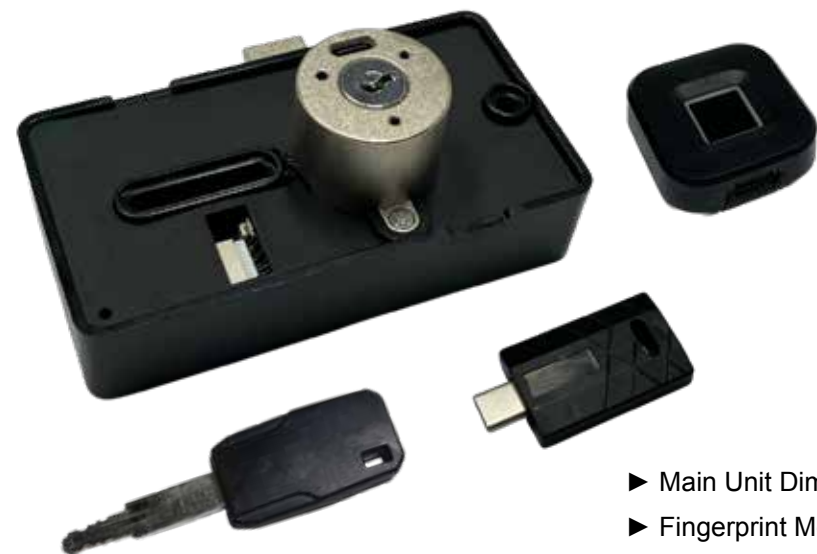

- ▶ Main Unit Dimension : 105 x 55 x 24 mm
- ▶ Fingerprint Module Dimension : 32 x 32 x 8.7 mm
- ▶ Applicable Panel Thickness : 14, 16, 18 mm
- ▶ Input : AAA x 4 (Emergency Power Port : Type C 5V1A)
- ▶ Unlocking Methods : Fingerprint Recognition, E-Key, Mechanical Key
- Cutting hole : Ø 32 mm

DL-01

Fingerprint Cabinet Lock

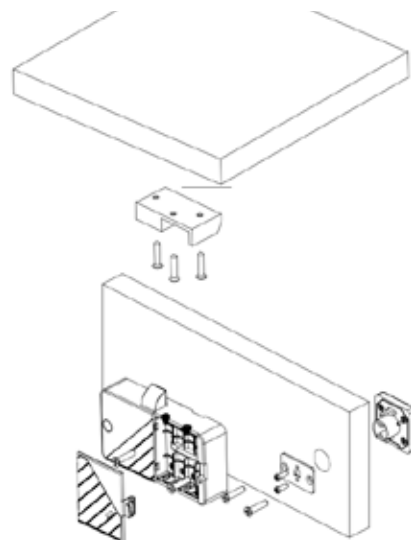

- ▶ Main Unit Dimension : 105 x 55 x 22.5 mm
- ▶ Fingerprint Module Dimension : 32 x 32 x 8.7 mm
- ▶ Applicable Panel Thickness : <12 mm
- ▶ Input : AAA x 3 (Emergency Power Port : Type C 5V1A)
- ▶ Unlocking Methods : Fingerprint Recognition, E-Key
- Cutting hole : Ø 16 mm

POWER

- Extension AC + Type C Power Delivery
- Extension AC + Type C Power Delivery + Qi2 Magsafe Charger
- Extension USB + Type C Series
- Extension 2 Type C Series
- Extension 2 USB Series
- Extension AC + Type C Power Delivery
- Extension AC + USB Series
- Wireless Charger Series


POWER

Total
45W

Extension AC + Type C Power Delivery

PD-131E-45W

Extension AC + Type C Power Delivery

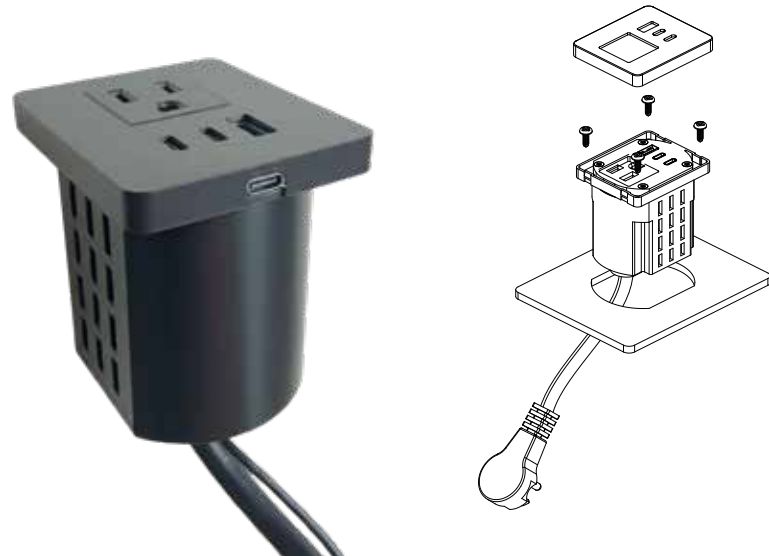

- ▶ Dimension : 70 x 60 mm, H : 64.9 mm
- ▶ Input cord length : 3000 mm
- ▶ Rated Voltage : 125 VAC
- ▶ Output :
 - AC : 1500W max
 - DC : PD 45W max
- ▶ Single Port Output :
 - Type C : 5V3A, 9V3A, 12V3A, 15V3A, 20V2.25A
 - Type A : 5V3A, 9V2A, 12V1.5A
- ▶ Dual Port Output :
 - Type C + Type C : PD 20W + PD 20W
 - Type C + Type A : PD 20W + QC 18W
- ▶ Color : Black / White
- Include screw cover x 4pcs
- Cutting hole : 65 x 51mm

PD-121E-45W

Extension AC + Type C Power Delivery + Qi2 Magsafe Charger



- ▶ Dimension : 70 x 60 mm, H : 64.9 mm
- ▶ Surface dimensions: 140 x 60mm, H: 8.5mm
- ▶ Input cord length : 3000 mm
- ▶ Rated Voltage : 125 VAC
- ▶ Output :
 - AC : 1500W max
 - DC : PD 45W max / Qi 15W max
- ▶ Single Port Output :
 - Type C : 5V3A, 9V3A, 12V3A, 15V3A, 20V2.25A
 - Type A : 5V3A, 9V2A, 12V1.5A
 - Qi : 15W
- ▶ Dual Port Output :
 - Type C + Qi : PD 20W + Qi 15W
 - Type A + Qi : PD 20W + Qi 15W
- ▶ Color : Black / White
- Include screw cover x 4pcs
- Cutting hole : 65 x 51mm



Charging to 80% 40 min

Extension USB + Type C Series

Total
32W


POWER

TUM-11B

Embedded Extension Cord with 1 USB + 1 Type C



- ▶ Dimension : 40 x 26 mm, H : 48.7 mm
- ▶ Cable length : 300 mm
- ▶ Input : 12V / 3A DC adapter
- ▶ Output : Total 32W max
 - Type C : 5V3A, 9V2.22A, 12V1.67A
 - Type A : 5V2.4A max
- ▶ Color : Black / White
- Cutting hole : 24 x 21 mm

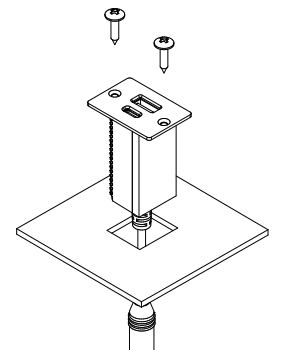


TUS-11B

Surface-Mounting Extension Cord with 1 USB + 1 Type C




- ▶ Dimension : 39.3 x 19.8 mm, H : 48.4 mm
- ▶ Cable length : 300 mm
- ▶ Input : 12V / 3A DC adapter
- ▶ Output : Total 32W max
 - Type C : 5V3A, 9V2.22A, 12V1.67A
 - Type A : 5V2.4A max
- ▶ Color : Black / White

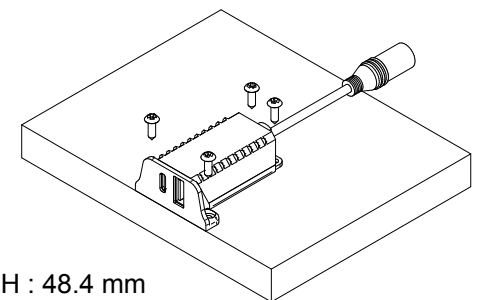

Charging to 80% 60 min

TU-11E-20W


Embedded Extension Cord with 1 USB + 1 Type C

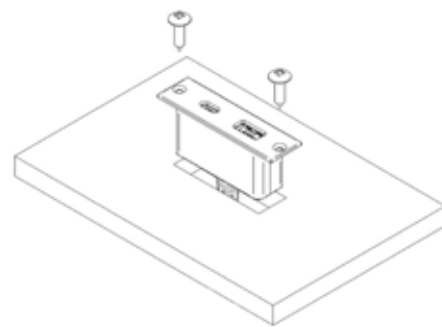

- ▶ Dimension : 62 x 18.1 mm, H : 36.7 mm
- ▶ Input : 12V2A
- ▶ Output :
 - Type C : 5V3A / 9V2.22A / 12V1.67A
 - Type A : 5V3A / 9V 2A / 12V1.5A
- ▶ Color : Black / White
- Cutting hole : 50 x 17 mm

TU-11S-20W

Surface-Mounting Extension Cord with 1 USB + 1 Type C

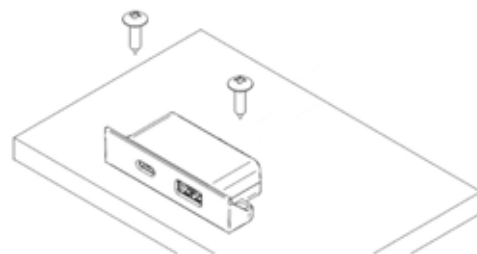


- ▶ Dimension : 60.9 x 18.1mm, H : 36.7mm
- ▶ Input : 12V2A
- ▶ Output :
 - Type C : 5V3A / 9V2.22A / 12V1.67A
 - Type A : 5V3A / 9V 2A / 12V1.5A
- ▶ Color : Black / White



Charging to 80% 60 min

TU-11E-30W


Embedded Extension Cord with 1 USB + 1 Type C

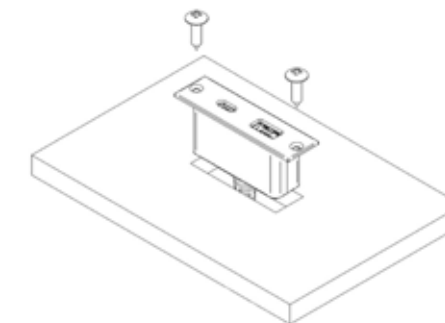

- ▶ Dimension : 62 x 18.1 mm, H : 36.7 mm
- ▶ Input : 24V1.5A
- ▶ Output :
 - Type C : 5V3A / 9V3A / 12V2.5A / 15V2A / 20V1.5A
 - Type A : 5V3A / 9V 2A / 12V1.5A
- ▶ Color : Black / White
- Cutting hole : 50 x 17 mm

TU-11S-30W

Surface-Mounting Extension Cord with 1 USB + 1 Type C

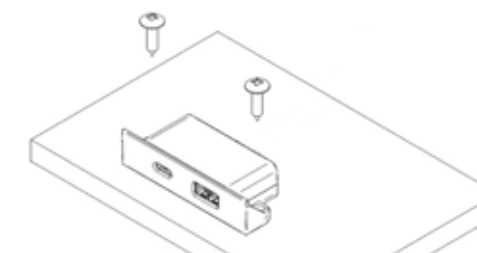


- ▶ Dimension : 60.9 x 18.1mm, H : 36.7mm
- ▶ Input : 24V1.5A
- ▶ Output :
 - Type C : 5V3A / 9V3A / 12V2.5A / 15V2A / 20V1.5A
 - Type A : 5V3A / 9V 2A / 12V1.5A
- ▶ Color : Black / White



Charging to 80% 50 min

TUM-11BL


Embedded Extension Cord with 1 USB + 1 Type C

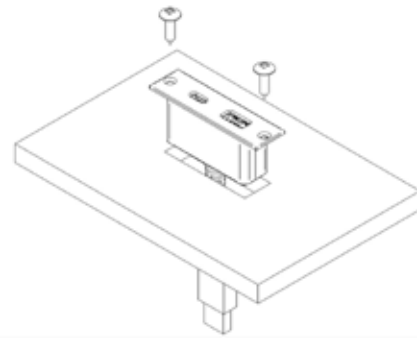

- ▶ Dimension : 66.2 x 17.9 mm, H : 25.9 mm
- ▶ Cable length : 1800 mm
- ▶ Input : 5V / 2.4A USB adapter
- ▶ Color : Black / White
- Cutting hole : 50 x 17 mm

TUS-11BL

Surface-Mounting Extension Cord with 1 USB + 1 Type C

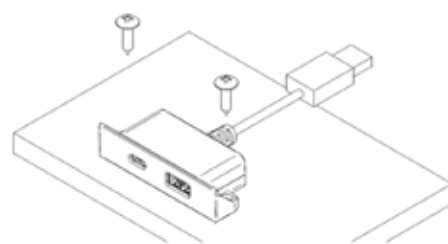


- ▶ Dimension : 67 x 15.9 mm, H : 25.9 mm
- ▶ Cable length : 1800 mm
- ▶ Input : 5V / 2.4A USB adapter
- ▶ Color : Black / White



Charging to 80% 120 min

TU-11A-12W


Round Embedded USB Extension Cord

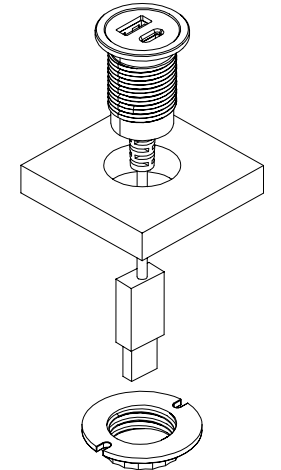

- ▶ Dimension : Ø 33 mm, H : 45 mm
- ▶ Cable length : 1800 mm
- ▶ Input : 5V / 2.4A USB adapter
- ▶ Color : Black / White
- Cutting hole : Ø 27 mm

TU-11B-12W

Square Embedded USB Extension Cord

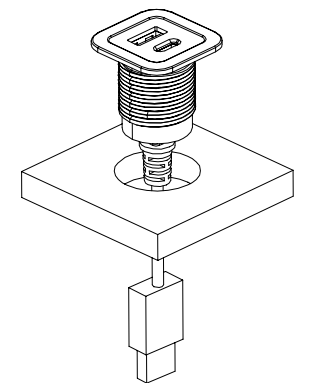


- ▶ Dimension : 32 x 32 mm, H : 45 mm
- ▶ Cable length : 1800 mm
- ▶ Input : 5V / 2.4A USB adapter
- ▶ Color : Black / White
- Cutting hole : Ø 27 mm



Charging to 80% 120 min

TUM-02BL


Embedded Extension Cord with 2 Type C

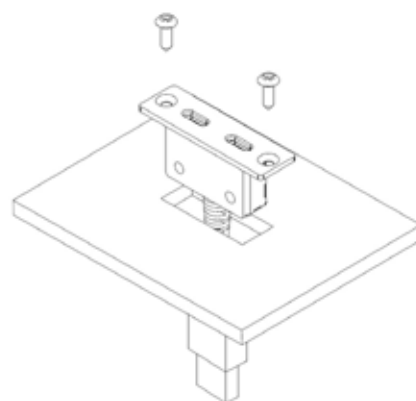

- ▶ Dimension : 48 x 14 mm, H : 20.5 mm
- ▶ Cable length : 1800 mm
- ▶ Input : 5V / 2.4A USB adapter
- ▶ Color : Black / White
- **Cutting hole : 31 x 11 mm**

TUS-02BL

Surface-Mounting Extension Cord with 2 Type C

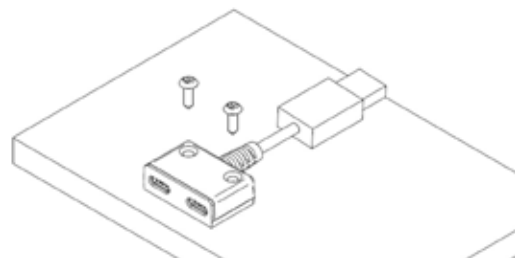


- ▶ Dimension : 30.7 x 10 mm, H : 20 mm
- ▶ Cable length : 1800 mm
- ▶ Input : 5V / 2.4A USB adapter
- ▶ Color : Black / White



Charging to 80% 120 min

PD-11S-30W


Surface-Mounting Extension Cord with 1USB+1 Type C

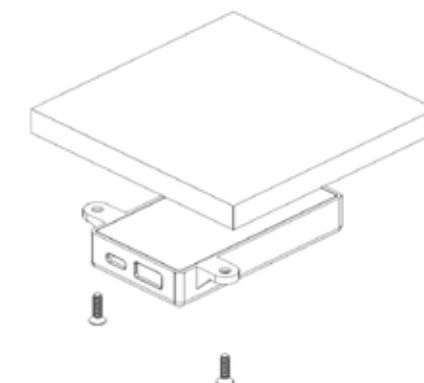

- ▶ Dimension : 45 x 15 x 81.5mm
- ▶ Input Cable length : 1800mm
- ▶ Rated Voltage : 100-240 Vac
- ▶ Output :
 - Type C : 5V3A / 9V3A / 12V2.5A / 15V2A / 20V1.5A
 - Type A : 5V3A / 9V2A / 12V1.5A
 - Type C + Type A Total : 5V3A Max
- ▶ Color : Black / White

PD-11E-30W

Embedded Extension Cord with 1USB+1 Type C

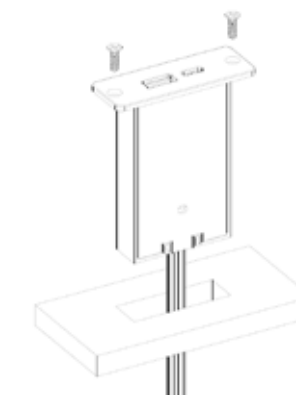

- ▶ Dimension : 65 x 21 x 81.5mm
- ▶ Input Cable length : 1800mm
- ▶ Rated Voltage : 100-240 Vac
- ▶ Output :
 - Type C : 5V3A / 9V3A / 12V2.5A / 15V2A / 20V1.5A
 - Type A : 5V3A / 9V2A / 12V1.5A
 - Type C + Type A Total : 5V3A Max
- ▶ Color : Black / White
- **Cutting hole : 16 x 46mm**




Charging to 80% 50 min

PDU-111-00B

Embedded Extension Cord with 1 AC + 1 USB + 1 Type C



- Include screw cover x 2pcs
- Cutting hole : 105 x 50 mm

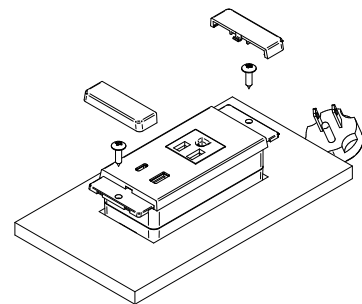


- ▶ Dimension: 133.6 x 52.5 mm, H : 50.5 mm
- ▶ Cord length : 3000 mm
- ▶ Output :
 - AC outlet : 1500W max
 - Type C : 5V3A / 9V2.22A / 12V1.67A Max
 - Type A : 5V3A / 9V2A / 12V1.5A Max
 - Type C+Type A Total : 5V3A Max
- ▶ Color : Black / White

PDU-211-00B

Embedded Extension Cord with 2 AC + 1 USB + 1 Type C



- Include screw cover x 2pcs
- Cutting hole : 146 x 50 mm

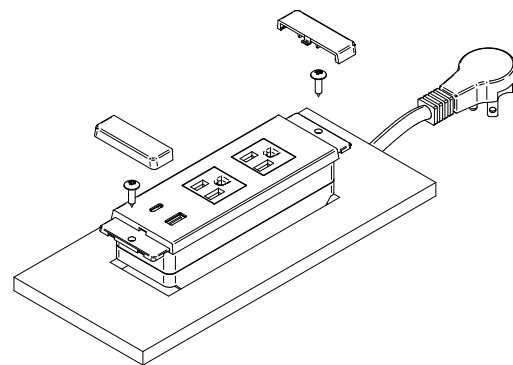


- ▶ Dimension : 173.8 x 52.5 mm, H : 45.5 mm
- ▶ Cord length : 3000 mm
- ▶ Output :
 - AC outlet : 1500W max
 - Type C : 5V3A / 9V2.22A / 12V1.67A Max
 - Type A : 5V3A / 9V2A / 12V1.5A Max
 - Type C+Type A Total : 5V3A Max
- ▶ Color : Black / White

PDU-121-00B

Embedded Extension Cord with 1 AC + 2 USB + 1 Type C



- Include screw cover x 2pcs
- Cutting hole : 128 x 50 mm

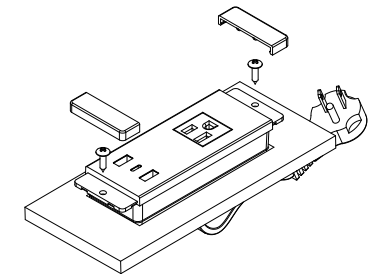


- ▶ Dimension : 156.2 x 52.8 mm, H : 48.6 mm
- ▶ Cord length : 3000 mm
- ▶ Output :
 - AC outlet : 1500W max
 - Type C : 5V3A / 9V3A / 12V3A / 15V3A / 20V2.25A
 - Type A : 5V2.4A max
- ▶ Color : Black / White

PDU-221-00B

Embedded Extension Cord with 2 AC + 2 USB + 1 Type C



- Include screw cover x 2pcs
- Cutting hole : 170 x 50 mm

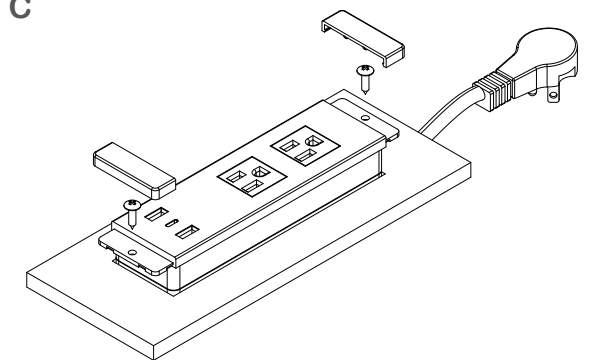

- ▶ Dimension : 198 x 52.8 mm, H : 50 mm
- ▶ Cord length : 3000 mm
- ▶ Output :
 - AC outlet : 1500W max
 - Type C : 5V3A / 9V3A / 12V3A / 15V3A / 20V2.25A
 - Type A : 5V2.4A max
- ▶ Color : Black / White

POWER

Total
3000W

Type C
45W



Extension AC + Type C Power Delivery

PDU-221U-00B

Embedded Extension Universal Socket with 2 USB + 1 Type C



- ▶ Dimension : 197.7 x 52.8 mm, H : 53.5 mm
- ▶ Cord length : 2700 mm
- ▶ Rated Voltage : 90 - 240 VAC
- ▶ Output :
 - AC outlet : 3000W max
 - Type C : 5V3A, 9V3A, 12V3A, 15V3A, 20V2.25A
 - Type A : 5V2.4A max
- ▶ Color : Black / White
- Include screw cover x 2pcs
- Cutting hole : 170 x 50 mm

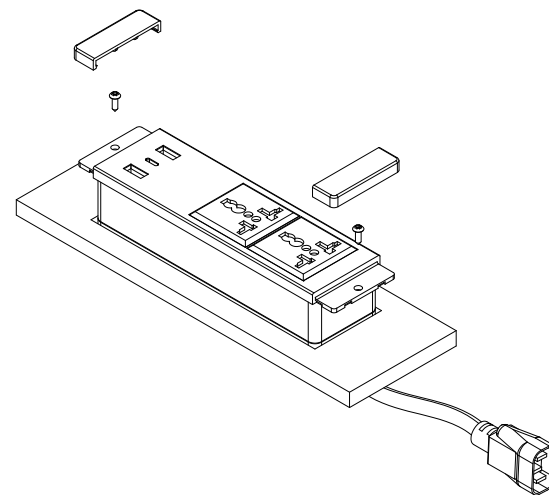

Charging to 80% 40 min

Extension AC + Type C Power Delivery

Type C
45W

Total
3000W


POWER

PDU-221U-01B

Embedded Extension Universal Socket with An External Outlet




- ▶ Dimension : 197.7 x 52.8 mm, H : 53.5 mm
- ▶ Input cord length : 2700 mm
- ▶ Output cord length : 300 mm
- ▶ Rated Voltage : 90 - 240 VAC
- ▶ Output :
 - AC outlet : 3000W max
 - Type C : 5V3A, 9V3A, 12V3A, 15V3A, 20V2.25A
 - Type A : 5V2.4A max
- ▶ Color : Black / White
- Include screw cover x 2pcs
- Cutting hole : 170 x 50 mm

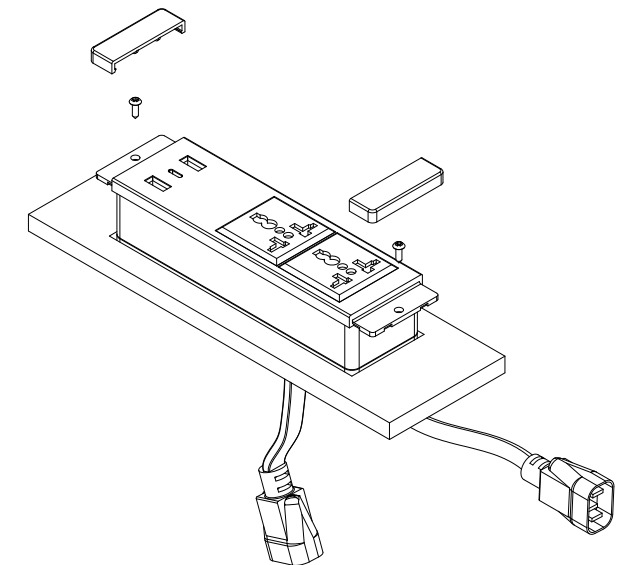


Charging to 80% 40 min

PDU-221U-01B + Lamp

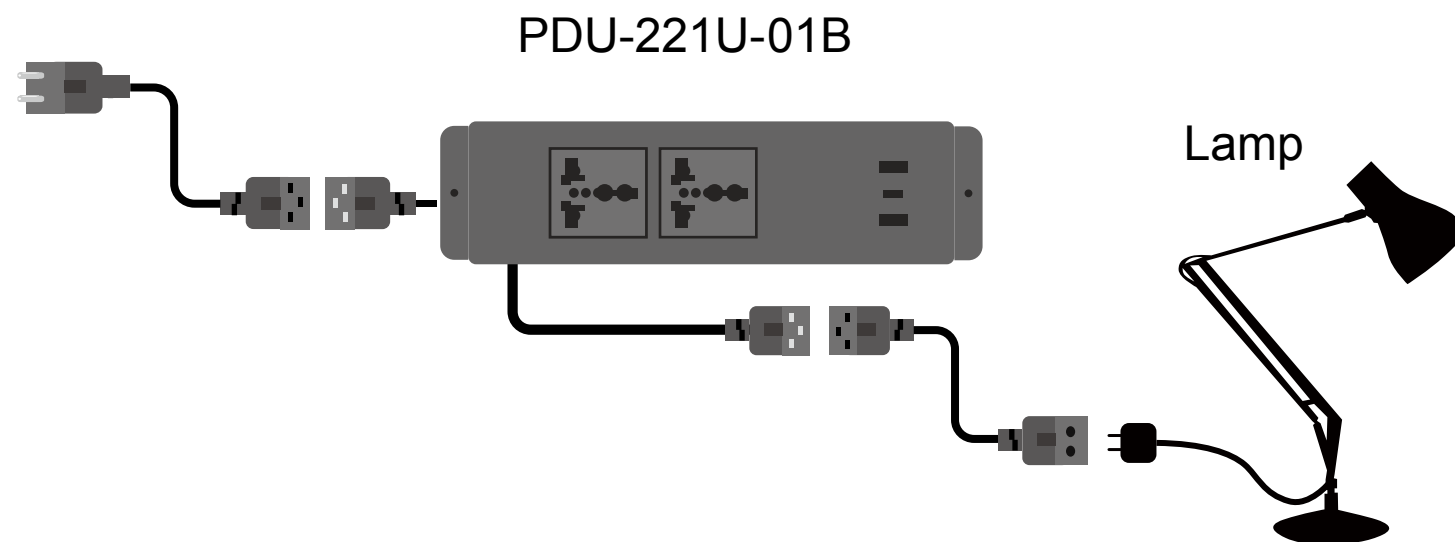

QI-00E-15W


Embedded Fast Charging Wireless Charger

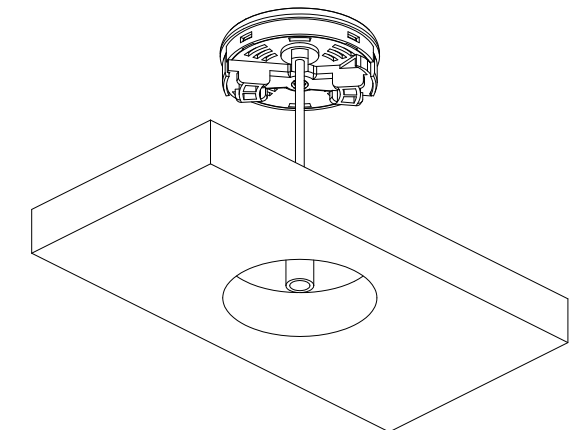

- ▶ Dimension : Ø 63 mm, H : 22 mm
- ▶ Cable length : 300 mm
- ▶ Comply with charging Qi BPP, EPP, MPP standard devices
- ▶ Input : 9V / 2.5A DC adapter
- ▶ Color : Black / White
- Cutting hole : Ø 61 mm

QI-00G-15W

Invisible Fast Charging Wireless Charger

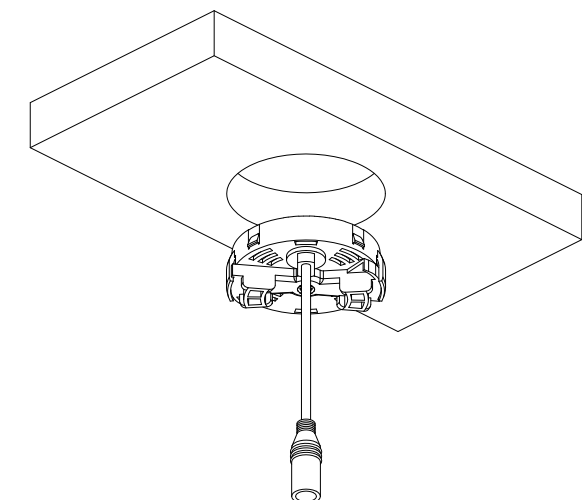

- ▶ Dimension : Ø 61.2 mm, H : 20.6 mm
- ▶ Cable length : 300 mm
- ▶ Comply with charging Qi BPP, EPP, MPP standard devices
- ▶ Input : 9V / 2.5A DC adapter
- ▶ Recommended Tabletop Thickness: ≤2mm
- Cutting hole : Ø 61 mm


POWER



Wireless Charger Series

QI-11M-15W

Push-Lift Fast Charging Wireless Charger

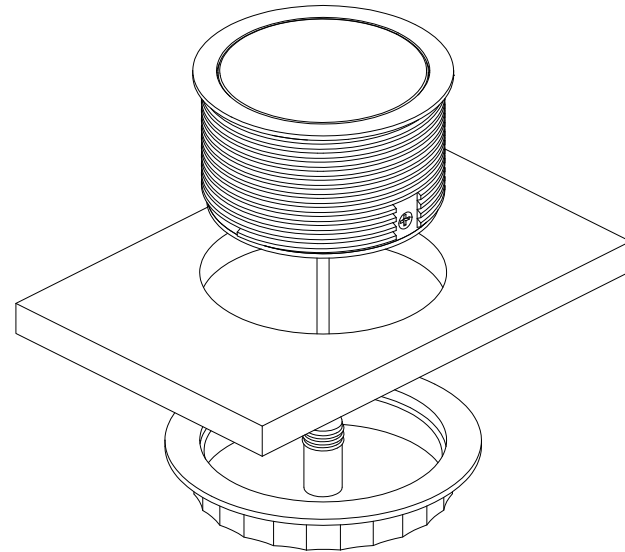

- ▶ Dimension : Ø 75 mm, H :42.9 mm
- ▶ Pop-up design with USB(QC 18W) & Type C(PD 20W) outlet
- ▶ Comply with charging Qi BPP, EPP, MPP standard devices
- ▶ Input : 12V / 3A DC adapter
- **Cutting hole : Ø 71 mm**

CONTROL UNIT

Rocker Switch

Touchless Switch

Touch Switch




CONTROL UNIT

Rocker Switch

RS101

Rocker Switch

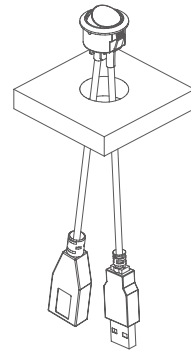

- Dimension : Ø 23 mm, H : 28 mm
- Male USB cable length : 1500 mm
- Female USB cable length : 1500 mm
- Input : 5V USB adapter
- Color : Black / White



Touchless Switch

CONTROL UNIT

PIR-11U05

Infrared Proximity Sensor Control Unit



- Sensor Dimension : 34.7 x 22.85mm
- USB plug length : 1500mm
- USB port length : 1500mm
- Detect distance : 0.7-3 meters
- Detect angle : 120°
- Input : 5V USB adapter

PIR-11V12

Infrared Proximity Sensor Control Unit




- Sensor Dimension : 34.7 x 22.85mm
- Male jack cable length : 300mm
- Female jack cable length : 300mm
- Detect distance : 0.7-3 meters
- Detect angle : 120°
- Input : 12V DC adapter

5V / 2.4A + ET-01S-01S + RS101 + LED-U00

5V / 2.4A ET-01S-01S

RS101

LED-U00

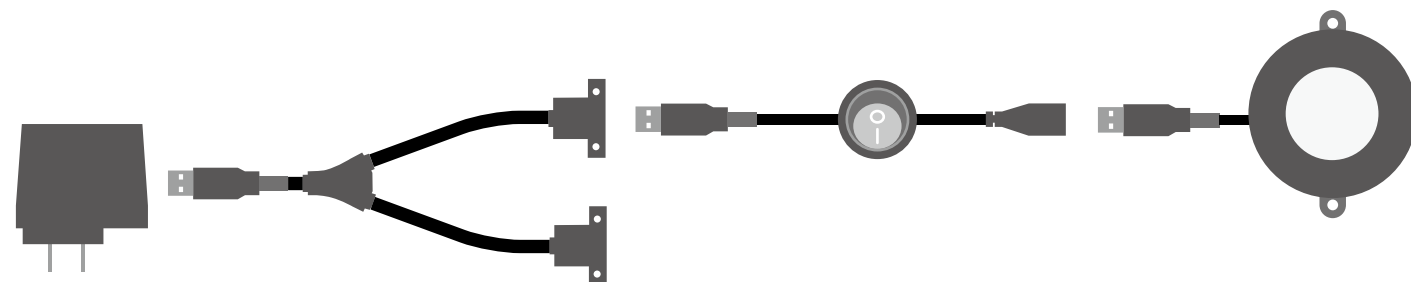

CONTROL UNIT

Touch Switch


LTS232V12

12V Touch Control Unit



- ▶ Dimension : 60 x 25 mm, H : 8.6 mm
- ▶ DC jack plug length : 1500 mm
- ▶ DC jack port length : 1500 mm
- ▶ Touch leads length : 900 mm / 1200 mm / 2200 mm
- ▶ Touch cable : Single / Double
- ▶ Input : 12V DC adapter

12V / 2A + LTS232V12 + LED-V00 + A610

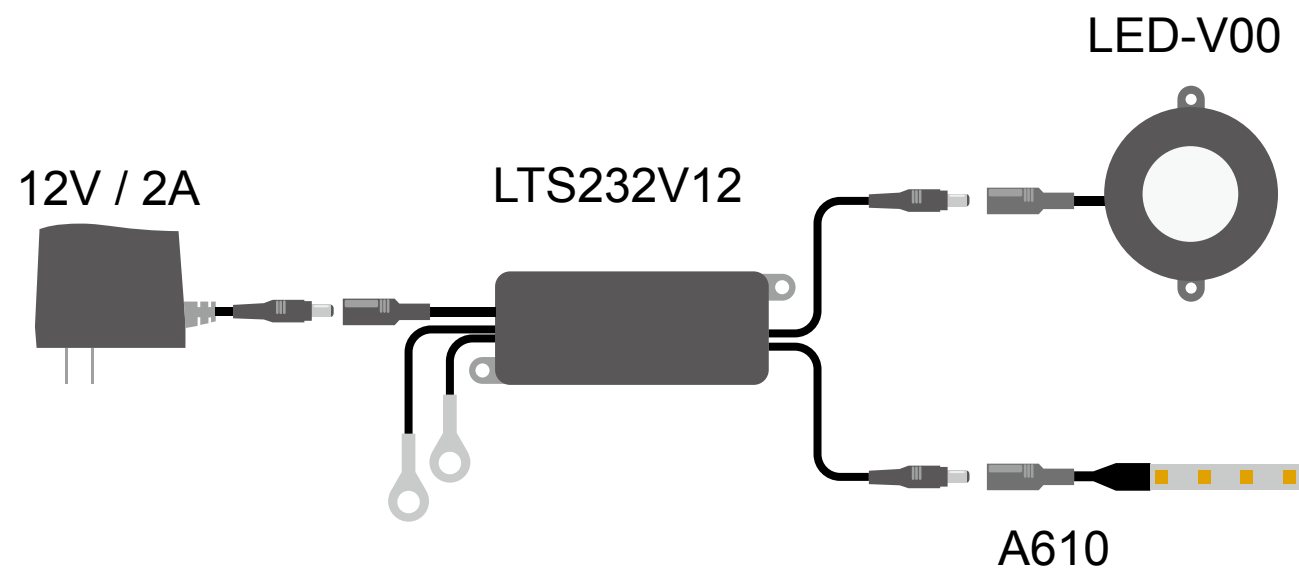

CONTROL UNIT

Touch Switch

LTS232U05

5V Touch Control Unit




Demo Video



- ▶ Dimension : 60 x 25 mm, H : 8.6 mm
- ▶ USB plug length : 3000 mm
- ▶ USB port length : 1500 mm
- ▶ Touch cable length : 900 mm / 1200 mm / 2200 mm
- ▶ Touch cable : Single / Double
- ▶ Input : 5V USB adapter

5V / 2.4A + LTS232U05 + LED-U00 + B610

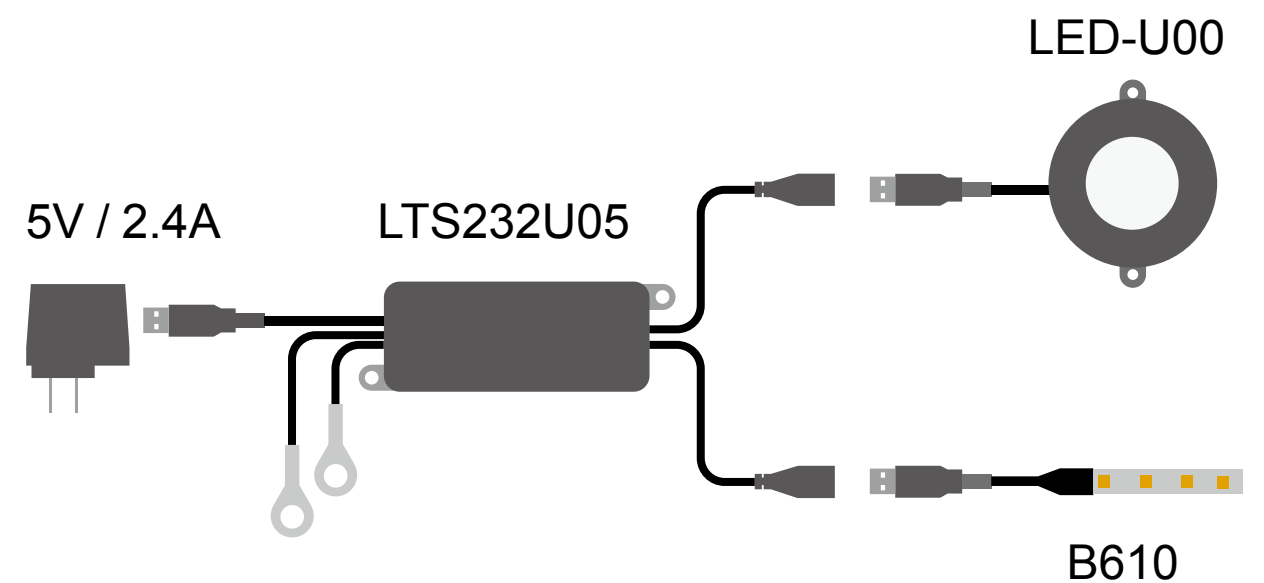

LIGHTING

LED Strip Light

5V Puck Light

12V Puck Light

5V Puck Light

SU-30

5V Dimmable LED Puck Light

- ▶ Dimension : Ø 60 mm, H : 11 mm
- ▶ Male USB cable length : 3000 mm
- ▶ Touch cable length : 900 mm / 1200 mm / 2200 mm
- ▶ Touch cable : Single / Double
- ▶ 3-step dimming function
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter
- ▶ Beam angle : 45°



SU-00

5V LED Puck Light


- ▶ Dimension : Ø 60 mm, H : 11 mm
- ▶ Male USB cable length : 1500 mm
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter
- ▶ Beam angle : 45°



LED-U30W-T

5V Dimmable LED Puck Light

- ▶ Dimension : Ø 60 mm, H : 16 mm
- ▶ Male USB cable length : 3000 mm
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter



LIGHTING

5V Puck Light



LED-U00

5V LED Puck Light

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Male USB cable length : 1500 mm
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter



LED-U30

5V Dimmable LED Puck Light

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Male USB cable length : 3000 mm
- ▶ Touch cable length : 900 mm / 1200 mm / 2200 mm
- ▶ Touch cable : Single / Double
- ▶ 3-step dimming function
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter



LED-U01

5V LED Puck Light With Extension Port

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Male USB cable length : 1500 mm
- ▶ Female USB cable length : 1500 mm
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter



LED-U31

5V Dimmable LED Puck Light With Extension Port

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Male USB cable length : 3000 mm
- ▶ Female USB cable length : 1500 mm
- ▶ Touch cable length : 900 mm / 1200 mm / 2200 mm
- ▶ Touch cable : Single / Double
- ▶ 3-step dimming function
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter



Demo Video

12V Puck Light



LED-V00

12V LED Puck Light

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Female jack cable length : 1500 mm
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



LED-V30

12V Dimmable LED Puck Light

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Female jack cable length : 3000 mm
- ▶ Touch cable length : 900 mm / 1200 mm / 2200 mm
- ▶ Touch cable : Single / Double
- ▶ 3-step dimming function
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



LED-V01

12V LED Puck Light With Extension Port

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Female jack cable length : 1500 mm
- ▶ Male jack cable length : 1500 mm
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



LED-V31

12V Dimmable LED Puck Light With Extension Port

- ▶ Dimension : Ø 60 mm, H : 18.5 mm
- ▶ Male jack cable length : 1500 mm
- ▶ Female jack cable length : 1500 mm
- ▶ Touch cable length : 900 mm / 1200 mm / 2200 mm
- ▶ Touch cable : Single / Double
- ▶ 3-step dimming function
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



- Connect 1~4 puck light : LED-U series
- Connect more than 4 puck lights : LED-V series

B610

5V LED Strip

- ▶ 2835LED, 60pcs LED per meter
- ▶ LED strip length : Should be multiples of 50 mm
- ▶ Male USB cable length : 300 mm
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter



A610

12V LED Strip

- ▶ 2835LED, 60pcs LED per meter
- ▶ LED Strip length : Should be multiples of 100 mm
- ▶ Female DC jack cable length : 1500 mm
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



A310

12V LED Strip

- ▶ 5050LED, 30pcs LED per meter
- ▶ LED Strip length : Should be multiples of 100 mm
- ▶ Female DC jack cable length : 1500 mm
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



12V LED Strip

- ▶ 3020 LED, 120 pcs LED per meter
- ▶ LED color : Warm white
- ▶ Input : 5V USB adapter



12V Dual-color 2 in 1 LED Strip

- ▶ 5050 2 in 1 LED, 60pcs LED per meter
- ▶ LED color : Warm white + Cool white
- ▶ Input : 5V USB adapter



12V Dual-color 2 in 1 LED Strip

- ▶ 3528 2 in 1 LED, 120 pcs LED per meter
- ▶ LED color : Warm white + Cool white
- ▶ Input : 5V DC adapter



12V Dual-color LED Strip

- ▶ 2835 LED, 120 pcs LED per meter
- ▶ LED color : Warm white + Cool white
- ▶ Input : 5V DC adapter



LIGHTING

COB LED Strip

- ▶ COB 252 pcs LED per meter
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



12V COB RGB Strip

- ▶ COB 420 pcs LED per meter
- ▶ LED color : Warm white
- ▶ Input : 12V DC adapter



12V RGB Strip

- ▶ 5050 RGB 3 in 1, 60 pcs LED per meter
- ▶ LED color : R / G / B
- ▶ Input : 12V DC adapter



12V RGB Strip

- ▶ 5050 RGB 3 in 1, 120 pcs LED per meter
- ▶ LED color : R / G / B
- ▶ Input : 12V DC adapter



ADPATER

Power Adapter



ADAPTER

Power Adapter

DC Adapter

5V1A
Total
5W



5V2.4A
Total
12W



9V2A
Total
18W



12V3A
Total
36W



Power Adapter

ADAPTER

PD Adapter

Fast Charging Adapter

20V3.25A
Total
PD65W



