

IR521

Multi-functional Uncooled Portable Thermal Imager



Introduce

IR521 integrates with uncooled thermal imager, visible camera, GPS, electronic compass, an eye-safe laser range finder. Can be used for target searching, locates the target's position, and take a photo on earth, sea surface, in forest. It's rugged and portable.

Application


Border Security / Law Enforcement / Patrol / Mission / Target Search

Features and Benefits

- 800×600 high resolution uncooled detector can be combined with visible technology to search, identify the target
- Built-in laser range finder, electrical compass and GPS, can have self localization and target location
- With the integrating function of taking photo, video and reviewing, which can be output by USB
- With external GPS, and two-way Wi-Fi function
- Binocular display, can be contacted with external display device

Specifications

Model	IR521
IR	
Detector Resolution	800×600 , 17μm , VOx
Spectral Range	8μm ~ 14μm
Electronic Focus	70mm
FOV	10.5°×8.4°(±5%)
Visible Camera	
Focus	3.63°×2.86°(±5%)
Resolution	1920×1080
Function	
Position Accuracy	≤10m (GPS、 BDS optional)
Orientation Accuracy	±0.5° (Root Mean Square)
Ranging	Eye-safe , 2.3m×2.3m typical target measurement ranging not less than 3km , maximum measuring range , for building 5km
Range Accuracy	≤±5m
Wi-Fi	Transfer digital video(AVI format) with Wi-Fi
Image	
Image Enhancement	Auto image filtering and sharp
Brightness/Contrast	Auto/Manual
Polarity	White-hot, black-hot , Red-hot, Green-hot
Digital Zoom	2X
Video Storage	Built-in 16G SD card , no less than 9000 compressed pictures (JPG) and no less than 2h video (AVI)
View Finder	OLED 1280×1024, Dioptry adjustment
Interface	
Electrical Interface	power、 video PAL (NTSC Optional) 、 communication RS232、 Wi-Fi、 USB、 built-in GPS (external connection)
Mechanical Interface	1/4 inch standard interface
Power	
Power Input	12V power adapter or 18650 battery(φ 18mm, 65mm long)
Continuous Working Time By Battery	≥5h (do not change battery)
Environment Parameters	
Working Temperature	- 40℃ ~ 60℃ (Except for display equipment)
Encapsulation	IP67
Electromagnetic Compatibility	GJB 151A-97
Physical Characteristics	
Weight	≤2.5kg (including battery)
Size	≤240mm×250mm×115mm

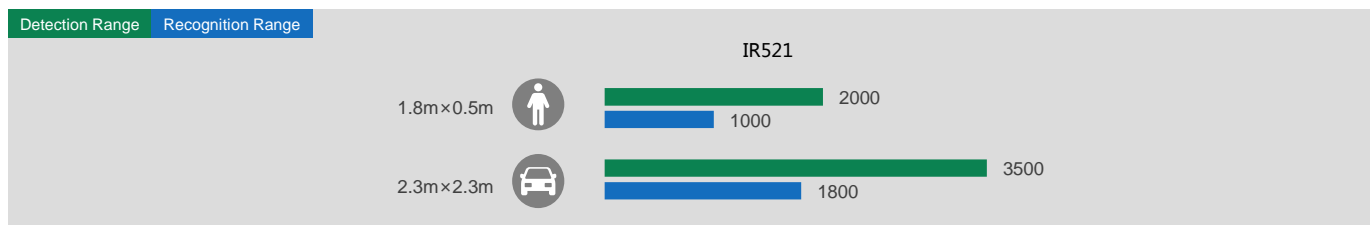

Ecor Tech Co.,Ltd
 No.106 Fengzhe Rd East, Gaungzhou, China
 T +86-20-81192997
 sales@usmartsensor.com
 www.usmartsensor.com