



QINGDAO UNI-POWER TYRE CO., LTD

ADD: Building 12, No.177-123, Heilongjiang South Road

Shibei District, Qingdao, China

TEL: 0086-532-67788675

WEBSITE: www.powertractyre.com



PASSENGER CAR TIRES

PRODUCT CATALOGUE

2025

www.powertractyre.com



A close-up photograph of the front side of an orange sports car. The focus is on the front wheel, which has a multi-spoke design with a central emblem. The car's body is a vibrant orange color, and the lighting creates strong highlights and shadows, emphasizing its sleek, aerodynamic lines. The text "ENJOY POWERFUL TRACTION" is overlaid in white, bold, sans-serif capital letters on the left side of the image.

**ENJOY
POWERFUL TRACTION**

COMPANY PROFILE

PCR&TBR

**20 MILLION PCR TYRES
5 MILLION TBR TYRES**

ISO

**CERTIFICATION OF ISO/TS 16949
QUALITY MANAGEMENT SYSTEM**



COMPANY PROFILE

Qingdao Uni-Power Tyre Co., Ltd., headquartered in Qingdao, integrates research, production, sales, and service. As a globally leading tyre manufacturer, the company primarily focuses on passenger car tyres and truck and bus tyres.

Powertrac, the company's first and flagship brand, spans both passenger car tyres and truck and bus tyres. Renowned for its exceptional cost-performance and dynamic brand image, it has earned global recognition.

The semi-steel product line highlights quietness, comfort, and superior handling performance, covering a wide range of series including HP, UHP, VAN, H/T, A/T, M/T, as well as A/S and WINTER tyres. With numerous advanced, independently developed tread designs and over 1,000 tyre models, it caters to the diverse global demand for semi-steel tyres.

Our products are distributed across more than 150 countries and regions worldwide. Customer-centric and market-driven, with innovation at the core, the company continues to enhance its competitiveness. Guided by the philosophy of achieving survival through quality and growth through innovation, we are committed to continuous improvement, striving to become an internationally renowned tyre expert and a century-old enterprise.

The headquarters of the POWERTRAC factory is located in Shandong Province, famously known as the "hometown of tyres" in China. POWERTRAC products are renowned for their high quality and cost-effectiveness, making the factory one of the top five privately-owned tyre manufacturers in China.

Established in 1991, the factory has invested over \$500 million in state-of-the-art production equipment. Equipped with advanced machinery and a dedicated development team, POWERTRAC can design and produce tailored products to meet diverse market demands. Thanks to the company's continuous development, improvements, and the trust and support of its customers, POWERTRAC has gained widespread market recognition and achieved remarkable success in the tyre industry.

POWERTRAC's marketing philosophy focuses on both the present and the global market. By fostering close cooperation with dealers, the company ensures they gain more opportunities in their respective markets through the most effective strategies.

Looking ahead, POWERTRAC remains committed to becoming a leading tyre manufacturing and distribution platform. With high-quality products, competitive pricing, and efficient service, POWERTRAC has the capability and confidence to be your reliable tyre supplier and trusted business partner.

COMPANY PROFILE

Core Values

Professional and dedicated sales team
Long-term, stable customer relationships
Global sales network
Extensive marketing experience
Fast and accurate market intelligence
Distinctive product range
Consistent, high-quality service

Work Style

Professional: Serving customers with the highest level of expertise.
Efficient: We provide the fastest solutions.
Enthusiastic: Follow up cooperation with the greatest enthusiasm.
Persistence: With the most sincere attitude to achieve the win-win cooperation.

Cultural Philosophy

Mission: Deliver exceptional tyres to every corner of the world.
Vision: Become a global leader in the tyre industry.

Business Philosophy

Focus on staff as the foundation and customers as the core.
Product-driven and market-oriented.
Continuously enhance our brand's competitive edge with the goal of becoming the world's leading tyre supplier.



CONTENTS

ECO	ADAMAS H/P	11
	CITYMARCH	15
	TAXI MAX	17
UHP	EcoSport X77	21
	DRIFT PRO	25
HT	CITYRACING	29
	CITYROVER	31
A/T M/T	POWER LANDER A/T	35
	WILDRANGER A/T	37
	WILDRANGER M/T	43

VAN	VANTOUR	49
	LOADKING	51
	VANMARCH	53
4-SEASON	POWERMARCH A/S II	57
	POWERMARCH VAN A/S	59
	POWERMARCH A/S	61
SNOW STUDDABLE	SNOWPRO STUD 01	65
	SNOWPRO STUD 02	69
SNOW	SNOWTOUR PRO	75
	SNOWSTAR PRO	77
	SNOW STAR	79
	SNOWVAN PRO	81
	Ice X pro	83
	SNOWMARCH	85

The Eco Series combines environmental protection with high efficiency, utilizing green manufacturing processes to reduce rolling resistance, enhance fuel economy, and lower carbon emissions. These tyres ensure driving safety and durability, making every journey more eco-friendly and efficient.

ECO

ADAMAS H/P

CITYMARCH

TAXI MAX





Four wide circumferential tread grooves deliver ride stability and offer excellent performance in wet conditions. Improved grooves and bead profile design provide better ride stability, endurance, and handling performance.

In the catalog, the three-slot specifications are marked with red bars.




The continuous solid center rib and lateral tread blocks connected by a rib-in-chain enhance steering stability, decrease block deformation, and reduce energy loss.



Continuous tread blocks on both shoulders provide great support to enhance stability during cornering, while the closed shoulders deliver an excellent, quiet ride.



The special tread compound provides excellent grip on both dry and wet roads and offers longer mileage.

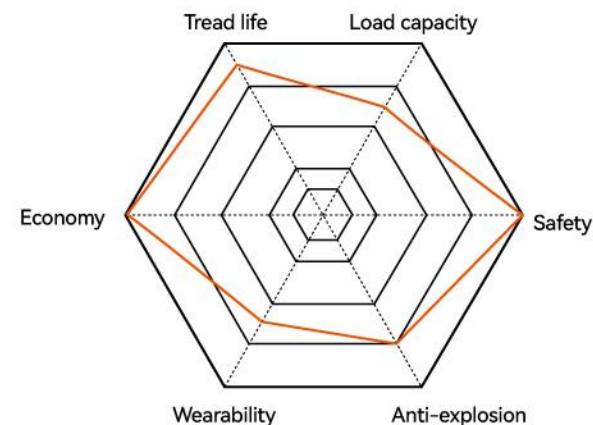

ADAMAS H/P

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
145/70R12	69T	4.5J	509	150	300	44	360AA	D	C 70
155/70R12	73T	4.5J	523	157	300	44	360AA	D	C 70
165/70R12	77T	5.0J	537	170	300	44	360AA	D	C 70
175/70R12	80T	5.0J	551	177	300	44	360AA	D	C 70
145/70R13	71T	4.5J	534	150	300	44	360AA	D	C 70
145/80R13	75T	4.0J	562	145	300	44	360AA	D	C 70
155/65R13	73T	4.5J	532	157	300	44	360AA	D	C 70
155/70R13	75T	4.5J	548	157	300	44	360AA	D	C 70
155/80R13	79T	4.5J	578	157	300	44	360AA	D	C 70
165/65R13	77T	5.0J	544	170	300	44	360AA	D	C 70
165/70R13	79T	5.0J	562	170	300	44	360AA	D	C 70
165/80R13	83T	4.5J	594	165	300	44	360AA	D	C 70
175/60R13	77H	5.0J	540	177	300	44	360AA	D	C 70
175/65R13	80T	5.0J	558	177	300	44	360AA	D	C 70
175/70R13	82T	5.0J	576	177	300	44	360AA	D	C 70
185/70R13	86T	5.5J	590	189	300	44	360AA	D	C 70
155/65R14	75H	4.5J	558	157	300	44	360AA	D	C 70
165/55R14	72H	5.0J	538	170	300	44	360AA	D	C 70
165/60R14	75H	5.0J	554	170	300	44	360AA	D	C 70
165/60R14	79TXL	5.0J	554	170	340	50	360AA	D	C 71
165/65R14	79H	5.0J	570	170	300	44	360AA	D	C 70
165/70R14	81H	5.0J	588	170	300	44	360AA	D	C 70

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
165/70R14	85TXL	5.0J	588	170	340	50	360AA	D	C 71
175/60R14	79H	5.0J	566	177	300	44	360AA	D	C 70
175/65R14	82H	5.0J	584	177	300	44	360AA	D	C 70
175/65R14	86TXL	5.0J	584	177	340	50	360AA	D	C 71
175/70R14	84H	5.0J	602	177	300	44	360AA	D	C 70
175/70R14	88TXL	5.0J	602	177	340	50	360AA	D	C 71
185/50R14	77V	6.0J	542	194	300	44	380AA	D	C 70
185/55R14	80H	6.0J	560	194	300	44	380AA	D	C 70
185/60R14	82H	5.5J	578	189	300	44	360AA	D	C 70
185/65R14	86H	5.5J	596	189	300	44	360AA	D	C 70
185/70R14	88H	5.5J	616	189	300	44	360AA	D	C 70
195/60R14	86H	6.0J	590	201	300	44	380AA	D	C 71
195/65R14	89H	6.0J	610	201	300	44	380AA	D	C 71
195/70R14	91H	6.0J	630	201	300	44	380AA	D	C 71
205/60R14	88H	6.0J	602	209	300	44	380AA	D	C 71
205/70R14	95H	6.0J	644	209	300	44	380AA	D	C 71
145/65R15	72T	4.5J	569	150	300	44	360AA	D	C 70
155/60R15	74T	4.5J	567	157	300	44	360AA	D	C 70
165/50R15	72V	5.0J	547	170	300	44	360AA	D	C 70
165/60R15	77H	5.0J	579	170	300	44	360AA	D	C 70
165/65R15	81H	5.0J	595	170	300	44	360AA	D	C 70
175/50R15	75H	5.5J	557	182	300	44	360AA	D	C 70



SURE GRIP, SMOOTH RIDE

INNOVATIVE DESIGN AND HIGH-PERFORMANCE TREAD ENSURE EXCELLENT GRIP AND EXTENDED DURABILITY, MAKING EVERY RIDE SMOOTH AND ENJOYABLE.

ADAMAS H/P

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER		PERMISSIVE	PRESSURE				
			MM	MM						
-175/55R15	77H	5.5J	573	182	300	44	360AA	D	C	70
-175/60R15	81H	5.0J	591	177	300	44	360AA	D	C	70
-175/65R15	84H	5.0J	609	177	300	44	360AA	D	C	70
185/45R15	75V	6.0J	547	183	300	44	380AA	D	C	70
185/55R15	82V	6.0J	585	194	300	44	380AA	D	C	70
-185/60R15	84H	5.5J	603	189	300	44	360AA	D	C	70
-185/60R15	88HXL	5.5J	603	189	340	50	360AA	D	C	71
-185/65R15	88H	5.5J	621	189	300	44	360AA	D	C	70
-185/65R15	92TXL	5.5J	621	189	340	50	360AA	D	C	71
195/50R15	82V	6.0J	577	201	300	44	380AA	D	C	71
195/55R15	85V	6.0J	595	201	300	44	380AA	D	C	71
195/60R15	88H	6.0J	615	201	300	44	380AA	D	C	71
195/60R15	88V	6.0J	615	201	300	44	380AA	D	C	71
195/65R15	91V	6.0J	635	201	300	44	380AA	D	C	71
195/65R15	95HXL	6.0J	635	201	340	50	380AA	D	C	72
205/55R15	88V	6.5J	607	214	300	44	380AA	D	C	71
205/60R15	91V	6.0J	627	209	300	44	380AA	D	C	71
205/65R15	94H	6.0J	647	209	300	44	380AA	D	C	71
205/65R15	94V	6.0J	647	209	300	44	380AA	D	C	71
205/70R15	96H	6.0J	669	209	300	44	380AA	D	C	71
215/65R15	96H	6.5J	661	221	300	44	380AA	D	C	71
215/65R15	100HXL	6.5J	661	221	340	50	380AA	D	C	72

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER		PERMISSIVE	PRESSURE				
			MM	MM						
215/70R15	98H	6.5J	683	221	300	44	380AA	D	C	71
225/70R15	100H	6.5J	697	228	300	44	380AA	D	C	71
-175/50R16	77V	5.5J	582	182	300	44	360AA	D	C	70
-175/60R16	86HXL	5.0J	616	177	340	50	360AA	D	C	71
185/50R16	81V	6.0J	592	194	300	44	380AA	D	C	70
185/55R16	83V	6.0J	610	194	300	44	380AA	D	C	70
-185/60R16	86H	5.5J	628	189	300	44	360AA	D	C	70
195/50R16	88VXL	6.0J	602	201	340	50	380AA	D	C	72
195/55R16	87V	6.0J	620	201	300	44	380AA	D	C	71
195/60R16	89H	6.0J	640	201	300	44	380AA	D	C	71
205/55R16	91V	6.5J	632	214	300	44	380AA	D	C	71
205/60R16	92V	6.0J	652	209	300	44	380AA	D	C	71
205/60R16	96HXL	6.0J	652	209	340	50	380AA	D	C	72
205/65R16	95H	6.0J	672	209	300	44	380AA	D	C	71
215/60R16	95V	6.5J	664	221	300	44	380AA	D	C	71
215/60R16	99HXL	6.5J	664	221	340	50	380AA	D	C	72
215/65R16	102HXL	6.5J	686	221	340	50	380AA	D	C	72
215/65R16	98H	6.5J	686	221	300	44	380AA	D	C	71
225/60R16	102HXL	6.5J	676	228	340	50	380AA	D	C	72
225/60R16	98H	6.5J	676	228	300	44	380AA	D	C	71
225/65R16	100H	6.5J	698	228	300	44	380AA	D	C	71
235/60R16	100H	7.0J	688	240	300	44	380AA	D	C	71



CITYMARCH




Perfect handling and excellent cornering performance.



A smooth driving experience comes from a strong tread and soft sidewalls.



The asymmetric pattern shape and optimized variable pitch pattern design provide a quiet ride.
Silica tread compound for low rolling resistance and excellent wet grip.

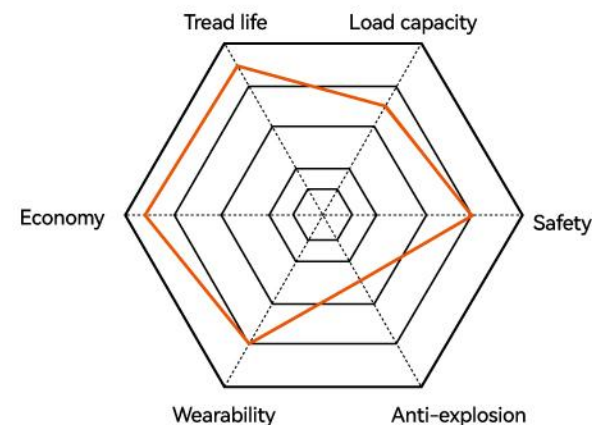

CITYMARCH

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
155/65R13	73T	4.50B	532	157	300	44	420AA	D	C 70
165/65R13	77T	5.00B	544	170	300	44	420AA	D	C 70
165/70R13	79T	5.00B	562	170	300	44	420AA	D	C 70
165/80R13	83T	4.50B	594	165	300	44	420AB	D	C 70
175/70R13	82T	5.00B	576	177	300	44	420AA	D	C 70
185/70R13	86T	5.50B	590	189	300	44	420AA	D	C 70
175/65R14	82H	5J	584	177	300	44	480AA	D	C 70
175/70R14	84H	5J	602	177	300	44	480AA	D	C 70
185/60R14	82H	51/2J	578	189	300	44	480AA	D	C 70
185/65R14	86H	51/2J	596	189	300	44	480AA	D	C 70
185/70R14	88H	51/2J	616	189	300	44	480AA	D	C 70
195/60R14	86H	6J	590	201	300	44	480AA	D	C 71
195/70R14	91H	6J	630	201	300	44	480AA	D	C 71
195/65R15	91H	6J	635	201	300	44	480AA	D	C 71
175/65R15	84H	5J	609	177	300	44	480AA	D	C 70
185/55R15	82V	6J	585	194	300	44	480AA	D	C 70
185/60R15	84H	51/2J	603	189	300	44	480AA	D	C 70
185/65R15	88H	51/2J	621	189	300	44	480AA	D	C 70
195/55R15	85H	6J	595	201	300	44	480AA	D	C 71

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
195/55R15	85V	6J	595	201	300	44	480AA	D	C 71
195/60R15	88H	6J	615	201	300	44	480AA	D	C 71
195/60R15	88V	6J	615	201	300	44	480AA	D	C 71
195/65R15	91V	6J	635	201	300	44	480AA	D	C 71
205/60R15	91V	6J	627	209	300	44	480AA	D	C 71
205/65R15	94H	6J	647	209	300	44	480AA	D	C 71
205/70R15	96H	6J	669	209	300	44	480AA	D	C 71
215/60R15	94H	61/2J	639	221	300	44	480AA	D	C 71
215/65R15	96H	61/2J	661	221	300	44	480AA	D	C 71
215/70R15	98H	61/2J	683	221	300	44	480AA	D	C 71
205/65R16	95H	6J	672	209	300	44	500AA	D	C 71
205/55R16	91H	61/2J	632	214	300	44	480AA	D	C 71
205/55R16	91V	61/2J	632	214	300	44	480AA	D	C 71
205/60R16	92V	6J	652	209	300	44	480AA	D	C 71
215/55R16	93H	7J	642	226	300	44	480AA	D	C 71
215/60R16	95H	61/2J	664	221	300	44	480AA	D	C 71
215/65R16	98H	61/2J	686	221	300	44	480AA	D	C 71
225/60R16	98H	61/2J	676	228	300	44	480AA	D	C 71
235/60R16	100H	7J	688	240	300	44	480AA	D	C 71

TAXI MAX




Safety performance on wet surfaces: four wide longitudinal grooves efficiently channel water away, significantly enhancing traction and reducing the risk of sideslip on wet surfaces.



Comfort and quietness: small cross-slots on the sides of the continuous circumferential ribs in the center are designed to mimic the principles of a muffler. These slots effectively absorb noise, resulting in a quieter ride and improved overall comfort.



Shoulder design for performance and safety: the small longitudinal grooves on both sides of the shoulder, combined with robust pattern blocks, provide optimal rigidity and exceptional handling. Additionally, these grooves facilitate efficient heat dissipation, enhancing safety and ensuring consistent performance.

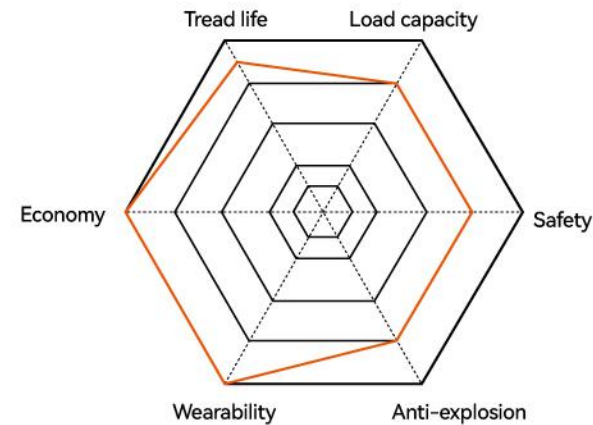

TAXI MAX

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
LT165/70R13	88/86S	5.00B	562	170	375	54	-	-	-	-
165/70R13	79T	5J	562	170	300	44	420AA	-	-	-
175/70R14	84H	5J	602	177	300	44	560AA	-	-	-
185/60R14	82T	51/2J	578	189	300	44	560AA	-	-	-
185/65R15	88H	51/2J	621	189	300	44	560AA	-	-	-
195/60R14	86T	6J	590	201	300	44	560AA	-	-	-
195/55R15	85V	6J	595	201	300	44	560AA	-	-	-
195/60R15	88V	6J	615	201	300	44	560AA	-	-	-
195/65R15	91V	6J	635	201	300	44	560AA	-	-	-
205/55R16	91V	61/2J	632	214	300	44	560AA	-	-	-

UHP (Ultra High Performance) tires are specifically engineered for high-performance vehicles. They are ideal for highways and city roads, providing exceptional grip, superior handling, and excellent high-speed stability.

ECOSPORT X77

DRIFT PRO

UHP






ECOSPORT X77



Extreme performance formula
The optimized groove ratio, available in both 5-groove and 4-groove designs, is paired with an innovative raw material formulation and advanced mixing technology. This enhances the rigidity of the pattern blocks, improving tread grip, handling precision, and braking performance. The result is a tire that offers higher driving limits and meets the demands of more advanced driving conditions.




Comfortable driving quality
Each specification adopts AI virtual analysis to simulate the working state of tyres under real road conditions, optimize the tread pitch arrangement, further eliminate unnecessary noise interference, and provide drivers and passengers with a more comfortable and quiet experience.



Exceptional dry land performance
The outer tread features a high sea-to-land ratio, enhancing road contact for superior grip. Its multi-layer skeleton structure boosts support rigidity, minimizing tire deformation during cornering and steering. This design ensures optimal grip on dry roads, delivering precise and reliable handling.



Enhanced Safety in Wet Conditions
The optimized groove ratio design of the inner tread significantly boosts drainage efficiency on wet surfaces. Its spike-shaped chamfer design, combined with a linear steel sheet layout, effectively penetrates the water film. This ensures a safe and stable driving experience, offering reliable hardware support for secure travel.

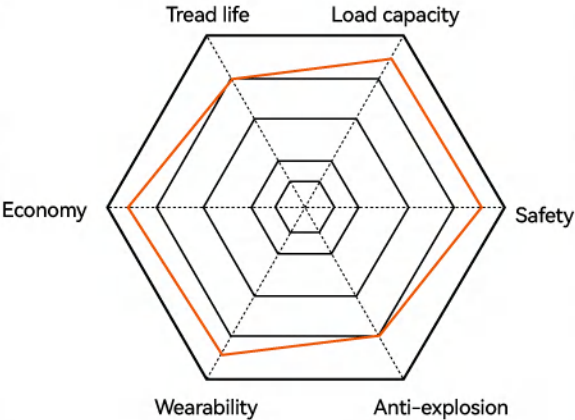

ECOSPORT X77

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
265/50ZR20	111WXL	8.5J	774	277	340	50	280AAA	C	B 72
225/45ZR17	94WXL	7.5J	634	225	340	50	280AAA	D	C 71
275/45ZR19	108YXL	9.0J	731	273	340	50	280AAA	C	B 72
235/50ZR17	100WXL	7.5J	668	245	340	50	280AAA	C	C 71
235/55ZR18	104WXL	7.5J	715	245	340	50	280AAA	C	C 71
285/45ZR19	111YXL	9.5J	739	285	340	50	280AAA	C	B 73
245/40ZR18	97YXL	8.5J	653	248	340	50	280AAA	C	B 71
305/40ZR20	112YXL	11.0J	752	313	340	50	280AAA	C	B 73
215/50ZR18	92W	7.0J	673	226	300	44	280AAA	D	C 71
255/45ZR18	103WXL	8.5J	687	255	340	50	280AAA	C	B 72
235/50ZR19	103YXL	7.5J	719	245	340	50	280AAA	C	C 71
235/55ZR19	105YXL	7.5J	741	245	340	50	280AAA	C	C 71
275/30ZR20	97YXL	9.5J	674	278	340	50	280AAA	C	B 72
275/35ZR18	99YXL	9.5J	649	278	340	50	280AAA	C	B 72
195/55R20	95HXL	6.0J	722	201	340	50	280AAA	C	C 71
245/35ZR20	95YXL	8.5J	680	248	340	50	280AAA	C	B 71
255/45ZR20	105YXL	8.5J	738	255	340	50	280AAA	C	B 72
235/50ZR18	101YXL	7.5J	693	245	340	50	280AAA	C	C 71
195/45R15	82VXL	6.5J	557	195	340	50	280AAA	D	C 71
195/55R16	91VXL	6.0J	620	201	340	50	280AAA	D	C 71
275/55ZR19	111W	8.5J	785	284	300	44	280AAA	C	B 72
205/50ZR16	91WXL	6.5J	612	214	340	50	280AAA	D	C 71

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
215/40ZR16	86WXL	7.5J	578	218	340	50	280AAA	D	C 71
275/45ZR20	110YXL	9.0J	756	273	340	50	280AAA	C	B 72
275/55ZR20	117WXL	8.5J	810	284	340	50	280AAA	C	B 72
255/40ZR18	99YXL	9.0J	661	260	340	50	280AAA	C	B 72
255/55ZR20	110WXL	8.0J	788	265	340	50	280AAA	C	B 72
255/55ZR18	109YXL	8.0J	737	265	340	50	280AAA	C	B 72
235/30ZR20	88YXL	8.5J	650	241	340	50	280AAA	D	C 71
315/40ZR21	115YXL	11.0J	785	320	340	50	280AAA	C	B 73
215/50ZR17	95YXL	7.0J	648	226	340	50	280AAA	C	C 71
235/45ZR17	97YXL	8.0J	644	236	340	50	280AAA	C	C 71
225/45ZR19	96WXL	7.5J	685	225	340	50	280AAA	C	C 71
245/40ZR17	95WXL	8.5J	628	248	340	50	280AAA	C	B 71
225/55ZR17	101WXL	7.0J	680	233	340	50	280AAA	C	C 71
235/55ZR17	103WXL	7.5J	690	245	340	50	280AAA	C	C 71
235/45ZR18	98WXL	8.0J	669	236	340	50	280AAA	C	C 71
215/50ZR17	95WXL	7.0J	648	226	340	50	280AAA	C	C 71
215/35ZR18	84WXL	7.5J	607	218	340	50	280AAA	D	C 71
255/35ZR18	94YXL	9.0J	635	260	340	50	280AAA	D	B 72
275/35ZR19	100WXL	9.5J	675	278	340	50	280AAA	C	B 72
275/40ZR21	107YXL	9.5J	753	278	340	50	280AAA	C	B 72
235/45ZR20	100YXL	8.0J	720	236	340	50	280AAA	C	C 71
245/40ZR20	99YXL	8.5J	704	248	340	50	280AAA	C	B 71

ECOSPORT X77

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER		PERMISSIVE	PRESSURE				
			MM	MM						
235/55ZR18	104YXL	7.5J	715	245	340	50	280AAA	C	C	71
255/35ZR19	96YXL	9.0J	661	260	340	50	280AAA	C	B	72
255/40ZR19	100YXL	9.0J	687	260	340	50	280AAA	C	B	72
245/40ZR20	103YXL	8.5J	704	248	340	50	280AAA	C	B	71
275/40ZR19	105YXL	9.5J	703	278	340	50	280AAA	C	B	72
215/45ZR18	93YXL	7.0J	651	213	340	50	280AAA	D	C	71
225/40ZR19	93WXL	8.0J	663	230	340	50	280AAA	D	C	71
225/45ZR18	95WXL	7.5J	659	225	340	50	280AAA	C	C	71
255/45ZR19	104YXL	8.5J	713	255	340	50	280AAA	C	B	72
255/55ZR19	111WXL	8.0J	763	265	340	50	280AAA	C	B	72
245/45ZR20	103YXL	8.0J	728	243	340	50	280AAA	C	B	71
215/55ZR16	97WXL	7.0J	642	226	340	50	280AAA	C	C	71
225/40ZR18	92WXL	8.0J	637	230	340	50	280AAA	D	C	71
265/35ZR18	97YXL	9.5J	643	271	340	50	280AAA	C	B	72
215/55ZR18	99WXL	7.0J	693	226	340	50	280AAA	C	C	71
225/55ZR18	102WXL	7.0J	705	233	340	50	280AAA	C	C	71
245/40ZR19	98YXL	8.5J	679	248	340	50	280AAA	C	B	71
315/35ZR21	111YXL	11.0J	753	320	340	50	280AAA	C	B	73
185/55R16	87VXL	6.0J	610	194	340	50	280AAA	D	C	70
205/55ZR16	94WXL	6.5J	632	214	340	50	280AAA	D	C	71
195/45R16	84VXL	6.5J	582	195	340	50	280AAA	D	C	71
215/45ZR16	90WXL	7.0J	600	213	340	50	280AAA	D	C	71
205/40ZR17	84WXL	7.5J	596	212	340	50	280AAA	D	C	71

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER		PERMISSIVE	PRESSURE				
			MM	MM						
205/50ZR17	93WXL	6.5J	638	214	340	50	280AAA	D	C	71
225/45ZR17	94YXL	7.5J	634	225	340	50	280AAA	D	C	71
205/50R15	86V	6.5J	587	214	300	44	280AAA	D	C	71
205/45ZR16	87WXL	7.0J	590	206	340	50	280AAA	D	C	71
265/45ZR20	108YXL	9.0J	746	266	340	50	280AAA	C	B	72
255/35ZR20	102YXL	9.0J	686	260	340	50	280AAA	C	B	72
255/50ZR20	109WXL	8.0J	764	265	340	50	280AAA	C	B	72
215/45ZR17	91WXL	7.0J	626	213	340	50	280AAA	D	C	71
235/35ZR19	91YXL	8.5J	647	241	340	50	280AAA	D	C	71
275/30ZR21	98YXL	9.5J	699	278	340	50	280AAA	C	B	72
235/40ZR18	95WXL	8.5J	645	241	340	50	280AAA	C	C	71
215/45ZR17	91YXL	7.0J	626	213	340	50	280AAA	D	C	71
225/55ZR16	99W	7.0J	654	233	340	50	280AAA	C	C	71
255/50ZR19	107W	8.0J	739	265	340	50	280AAA	C	B	72
205/45ZR17	88WXL	7.0J	616	206	340	50	280AAA	D	C	71
265/30ZR19	93YXL	9.5J	643	271	340	50	280AAA	D	B	72
275/50ZR20	113WXL	8.5J	784	284	340	50	280AAA	C	B	72
235/40ZR18	95YXL	8.5J	645	241	340	50	280AAA	C	C	71
285/50ZR20	116WXL	9.0J	794	297	340	50	280AAA	C	B	73
225/45ZR18	95YXL	7.5J	659	225	340	50	280AAA	C	C	71
225/40ZR19	93YXL	8.0J	663	230	340	50	280AAA	D	C	71
225/45ZR19	96YXL	7.5J	685	225	340	50	280AAA	C	C	71
235/40ZR19	96YXL	8.5J	671	241	340	50	280AAA	C	C	71

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER		PERMISSIVE	PRESSURE				
			MM	MM						
195/40ZR17	81 WXL	7.0J	588	200	340	50	280AAA	D	C	71
245/35ZR19	93 YXL	8.5J	655	248	340	50	280AAA	D	B	71
295/40ZR20	110 YXL	10.5J	744	301	340	50	280AAA	C	B	73
225/50ZR16	96WXL	7.0J	632	233	340	50	280AAA	C	C	71
275/60ZR20	119WXL	8.0J	838	279	340	50	280AAA	C	B	72
225/35ZR20	93YXL	8.0J	666	230	340	50	280AAA	D	C	71
225/50ZR17	98YXL	7.0J	658	233	340	50	280AAA	C	C	71
245/45ZR18	100WXL	8.0J	677	243	340	50	280AAA	C	B	71
255/30ZR19	91YXL	9.0J	637	260	340	50	280AAA	D	B	72
275/30ZR19	96YXL	9.5J	649	278	340	50	280AAA	C	B	72
275/45ZR21	110YXL	9.0J	781	273	340	50	280AAA	C	B	72
225/40ZR18	92YXL	8.0J	637	230	340	50	280AAA	D	C	71
215/35ZR19	85YXL	7.5J	633	218	340	50	280AAA	D	C	71
295/35ZR21	107YXL	10.5J	739	301	340	50	280AAA	C	B	73
225/55ZR19	103WXL	7.0J	731	233	340	50	280AAA	C	C	71
235/45ZR19	99YXL	8.0J	695	236	340	50	280AAA	C	C	71
245/55ZR19	107WXL	7.5J	753	253	340	50	280AAA	C	B	71
245/30ZR20	97YXL	8.5J	656	248	340	50	280AAA	C	B	71
235/45ZR18	98YXL	8.0J	669	236	340	50	280AAA	C	C	71
255/50ZR20	109YXL	8.0J	764	265	340	50	280AAA	C	B	72
215/45ZR18	93WXL	7.0J	651	213	340	50	280AAA	D	C	71
245/40ZR18	97WXL	8.5J	653	248	340	50	280AAA	C	B	71
195/45ZR17	85WXL	6.5J	608	195	340	50	280AAA	D	C	71
235/45ZR17	97WXL	8.0J	644	236	340	50	280AAA	C	C	71
245/35ZR18	92YXL	8.5J	629	248	340	50	280AAA	D	B	71

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER		PERMISSIVE	PRESSURE				
			MM	MM						
225/35ZR19	88YXL	8.0J	641	230	340	50	280AAA	D	C	71
275/50ZR20	113YXL	8.5J	784	284	340	50	280AAA	C	B	72
315/35ZR20	110YXL	11.0J	728	320	340	50	280AAA	C	B	73
225/50ZR18	99WXL	7.0J	683	233	340	50	280AAA	C	C	71
265/50ZR19	110WXL	8.5J	749	277	340	50	280AAA	C	B	72
235/55ZR20	105WXL	7.5J	766	245	340	50	280AAA	C	C	71
245/50ZR20	105YXL	7.5J	754	253	340	50	280AAA	C	B	71
255/30ZR20	92YXL	9.0J	662	260	340	50	280AAA	D	B	72
245/35ZR21	96YXL	8.5J	705	248	340	50	280AAA	C	B	71
255/50ZR19	107YXL	8.0J	739	265	340	50	280AAA	C	B	72
215/40ZR18	89WXL	7.5J	629	218	340	50	280AAA	D	C	71
275/35ZR20	102YXL	9.5J	700	278	340	50	280AAA	C	B	72
245/45ZR17	99WXL	8.0J	652	243	340	50	280AAA	C	B	71
275/40ZR20	106YXL	9.5J	728	278	340	50	280AAA	C	B	72
295/40ZR21	111YXL	10.5J	769	301	340	50	280AAA	C	B	73
205/55ZR17	95WXL	6.5J	658	214	340	50	280AAA	C	C	71
235/50ZR18	101WXL	7.5J	693	245	340	50	280AAA	C	C	71
245/45ZR19	102YXL	8.0J	703	243	340	50	280AAA	C	B	71
245/45ZR18	100YXL	8.0J	677	243	340	50	280AAA	C	B	71
215/40ZR17	87WXL	7.5J	604	218	340	50	280AAA	D	C	71
225/35ZR18	87YXL	8.0J	615	230	340	50	280AAA	D	C	71
215/55ZR17	98WXL	7.0J	668	226	340	50	280AAA	C	C	71
225/50ZR17	98WXL	7.0J	658	233	340	50	280AAA	C	C	71
255/55ZR18	109WXL	8.0J	737	265	340	50	280AAA	C	B	72



M+S

RIM SIZE	18
SERIES	35
SPEED RATING	W

DRIFT PRO



High performance



Stability



Superior grip performance

Engineered with a professional racing-grade semi-slick compound, this design delivers exceptional grip and precise handling. The wider tread design increases the contact patch, enhancing traction for peak performance in extreme driving conditions.



Streamlined pattern

The streamlined tread pattern enhances a sense of motion and uniqueness. The wide central rib ensures stability during high-speed straight-line driving, delivering reliable performance on the road.




Sporty decoration

The serrated decorations on the tread blocks intersect with the main grooves, creating a more dynamic and agile tread design. This highlights the tire's sporty performance while enhancing brand recognition.



Optimized tire structure

The sidewall features a multilayer reinforcement structure, enhancing both radial and lateral rigidity. Computer-simulated analysis optimizes the tire's contact patch shape, significantly improving handling performance.

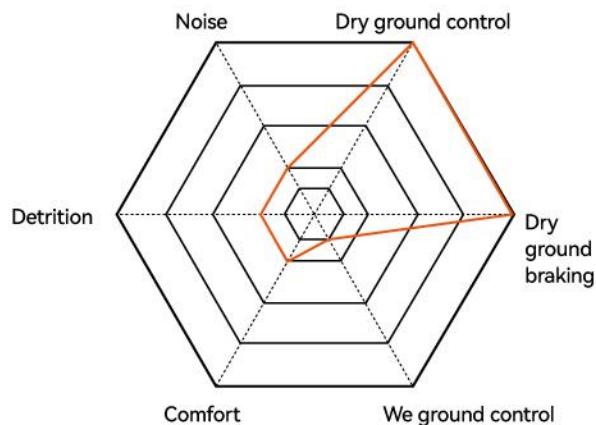

DRIFT PRO

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
265/35ZR18	97WXL	91/2J	643	271	340 49	200AA	-	-	-



HT

HT tyres are specifically designed for city roads and highways, making them perfect for short- to medium-distance journeys. They seamlessly combine the smooth performance of highway tyres with the durability of moderate off-road tyres, making them the ideal choice for daily commutes, long-distance travel, and light off-road adventures.

CITYRACING

CITYROVER

CITYRACING




Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.



Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimizes contact pressure distribution, improves road contact area and provides precise control. The serrated groove walls absorb noise and deliver a quieter ride.




Continuous block patterns on the shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage. Special tread compound delivers excellent grip on both dry and wet roads and reduces the rolling resistance to save oil and protect the environment.

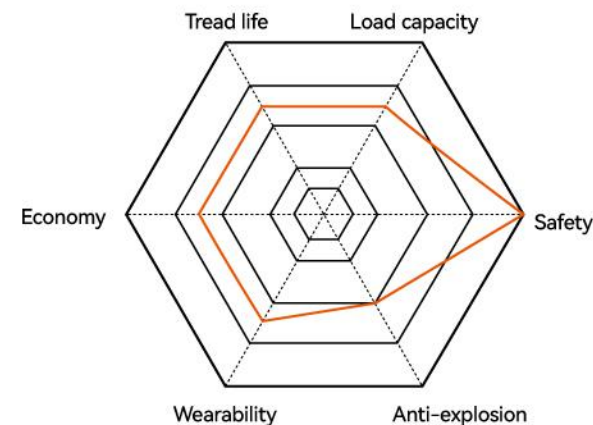


CITYRACING

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
245/30ZR22	92WXL	8 1/2J	707	248	340	50	300AA	D	C	72
255/30ZR22	95WXL	9J	713	260	340	50	300AA	D	C	73
255/30ZR24	97WXL	9J	764	260	340	50	300AA	D	C	73
275/25ZR24	96WXL	10J	748	283	340	50	300AA	D	C	73
235/65R17	108HXL	7J	738	240	340	50	420AA	D	C	72
255/60R17	110VXL	7 1/2J	738	260	340	50	300AA	D	C	73
255/60R18	112VXL	7 1/2J	763	260	340	50	300AA	D	C	73
305/35R20	107VXL	11J	722	313	340	50	300AA	D	C	73
265/35R22	102VXL	9 1/2J	745	271	340	50	300AA	D	C	73
285/35R22	106VXL	10J	759	290	340	50	300AA	D	C	73
305/40R22	114VXL	11J	803	313	340	50	300AA	D	C	73
305/45R22	118VXL	10J	833	303	340	50	300AA	D	C	73
295/35R24	110VXL	10 1/2J	816	301	340	50	300AA	D	C	73
305/35R24	112VXL	11J	824	313	340	50	300AA	D	C	73
245/65R17	107H	7J	750	248	300	44	420AA	D	C	71
255/65R17	110H	7 1/2J	764	260	300	44	420AA	D	C	71
265/65R17	112H	8J	776	272	300	44	420AA	D	C	71


CITYROVER



Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.




Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

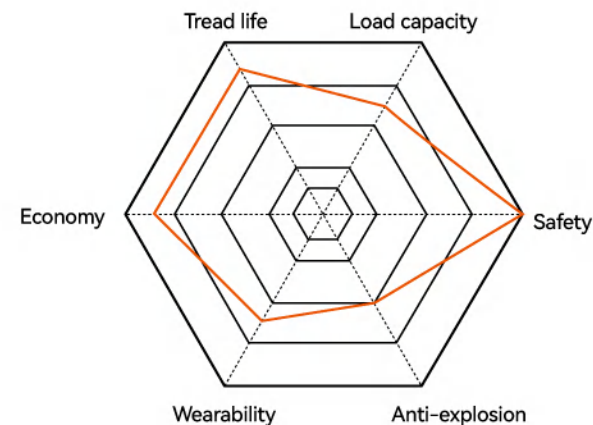

CITYROVER

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
225/70R16	107HXL	6 1/2J	722	228	340	50	420AA	C	C 72
245/70R16	111HXL	7J	750	248	340	50	420AA	C	C 72
235/60R17	106HXL	7J	714	240	340	50	420AA	C	C 72
245/65R17	111HXL	7J	750	248	340	50	420AA	C	C 72
225/60R18	104HXL	6 1/2J	727	228	340	50	420AA	C	C 72
235/55R18	104HXL	7 1/2J	715	245	340	50	420AA	C	C 72
235/60R18	107HXL	7J	739	240	340	50	420AA	C	C 72
235/65R18	110HXL	7J	763	240	340	50	420AA	C	C 72
215/70R16	100H	6 1/2J	708	221	300	44	420AA	C	C 71
LT225/75R16	115/112S	6J	744	223	550	80	---	0	0 0
LT235/85R16	120/116S	6 1/2J	806	235	550	80	---	0	0 0
LT245/75R16	120/116S	7J	774	248	550	80	---	0	0 0
LT265/75R16	123/120S	7 1/2J	804	267	550	80	---	0	0 0
235/70R16	106H	7J	736	240	300	44	420AA	C	C 71
245/70R16	107H	7J	750	248	300	44	420AA	C	C 71
255/65R16	109H	7 1/2J	738	260	300	44	420AA	C	C 72
255/70R16	111H	7 1/2J	764	260	300	44	420AA	C	C 72
265/70R16	112H	8J	778	272	300	44	420AA	C	C 72
275/70R16	114H	8J	792	279	300	44	420AA	C	C 72
LT245/75R17	121/118S	7J	800	248	550	80	---	0	0 0

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
LT265/70R17	121/118S	8J	804	272	550	80	---	0	0 0
215/60R17	96H	6 1/2J	690	221	300	44	420AA	C	C 71
215/65R17	99H	6 1/2J	712	221	300	44	420AA	C	C 71
225/60R17	99H	6 1/2J	702	228	300	44	420AA	C	C 71
225/65R17	102H	6 1/2J	724	228	300	44	420AA	C	C 71
235/60R17	102H	7J	714	240	300	44	420AA	C	C 71
235/65R17	104H	7J	738	240	300	44	420AA	C	C 71
245/65R17	107H	7J	750	248	300	44	420AA	C	C 71
255/65R17	110H	7 1/2J	764	260	300	44	420AA	C	C 72
265/65R17	112H	8J	776	272	300	44	420AA	C	C 72
265/70R17	115H	8J	804	272	300	44	420AA	C	C 72
275/65R17	115H	8J	790	279	300	44	420AA	C	C 72
285/65R17	116H	8 1/2J	802	292	300	44	420AA	C	C 74
225/55R18	98H	7J	705	233	300	44	420AA	C	C 71
245/60R18	105H	7J	751	248	300	44	420AA	C	C 71
255/70R18	113H	7 1/2J	815	260	300	44	420AA	C	C 72
265/60R18	110H	8J	775	272	300	44	420AA	C	C 72
275/60R18	113H	8J	787	179	300	44	420AA	C	C 72
275/65R18	116H	8J	815	279	300	44	420AA	C	C 72
285/60R18	116H	8 1/2J	799	292	300	44	420AA	C	C 74

The AT & MT Series are built to dominate the wildest terrains, combining all-terrain grit with mud-terrain muscle for unstoppable traction and rock-solid stability. From rugged mountain trails to deep, unrelenting mud, these tyres devour challenges with ease, letting you tackle the untamed and conquer the unknown with fearless confidence.

AT MT

POWER LANDER
A/T

WILDRANGER
A/T

WILDRANGER
M/T

BLACK-LETTER SIDEWALL

WHITE-LETTER SIDEWALL

BLACK-LETTER SIDEWALL





POWER LANDER A/T



Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.




The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.

Jointless nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

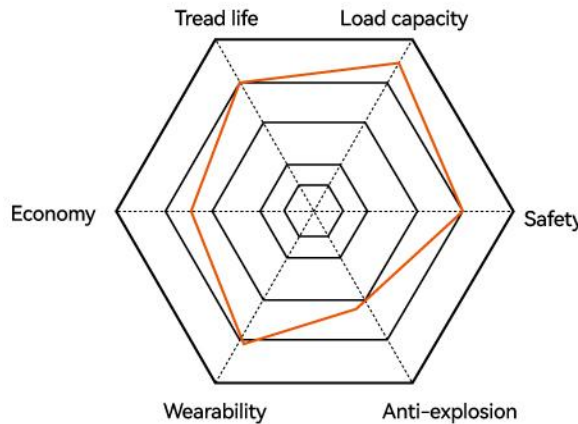

POWER LANDER A/T

SIZE	INDEX	SIDEWALL DESCRIPTION	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
P205/75R15	97T	OWL	51/2J	689	203	300	44	500AB	D	B	71
215/70R15C	109/107R	BSW	61/2J	683	221	450	65	---	C	C	72
P225/75R15	102T	OWL	6J	719	223	300	44	500AB	D	B	71
215R15C	112/110S	BLK	6J	725	218	450	65	---	C	C	72
LT215/85R16	115/112S	OWL	6J	772	216	550	80	---	C	C	72
P275/65R17	115T	OWL	8J	790	279	300	44	500AB	D	B	72
LT275/70R18	125/122S	BLK	8J	843	279	550	80	---	0	0	0

CONQUER ANY TERRAIN SAFELY AND RELIABLY

EXCELLENT OFF-ROAD PERFORMANCE AND ALL-ROUND PROTECTION CONQUER EXTREME TERRAIN, ENSURING A SAFE AND RELIABLE JOURNEY EVERY TIME.

WILDRANGER A/T



4 season



Drainage



Silence



Braking



SOLID PERFORMANCE

- The center pattern block adopts a chamfered design, ensuring better stability during tyre contact with the ground while preventing issues such as eccentric wear and block tearing. It delivers excellent performance on off-road terrain.

INDULGE IN PASSION

- The irregular pattern blocks are arranged in an orderly manner, allowing the tyre to easily handle the resistance generated in all directions under off-road conditions.
- A new type of support block has been added to the bottom of the shoulder pattern groove, greatly improving the stability of the pattern blocks and enhancing tear resistance. This provides the driver with full confidence to enjoy the fun of off-roading.



SUPERIOR PROTECTION

- The high-rigidity carcass design and stone-lined sidewalls effectively expel gravel and muddy water, ensuring that the side of the tyre remains dry and clean, while preventing punctures and scratches on the sidewall. This provides safety protection for both the driver and passengers.



COMFORTABLE DRIVING

- Designed for complex road conditions, it offers multi-directional pavement adhesion. It provides sufficient longitudinal driving traction and delivers excellent grip in lateral corners, helping the driver maintain better control of the vehicle.

M+S

RIM SIZE	15 - 20
SERIES	50 - 85
SPEED RATING	Q - H

Powerful Off-Road Performance, Conquering All Terrain

With outstanding durability and grip, it delivers exceptional off-road capabilities on rugged mountain roads and muddy wetlands. No matter the extreme conditions, it ensures stability, empowering drivers to explore the unknown and enjoy the thrill of the journey.


All-Around Protection, Worry-Free Safety

Equipped with multiple safety features and superior performance, it provides reliable support on various road conditions. From sudden braking to sharp turns and challenging weather, it performs with confidence, making every journey safe and trustworthy.

Multi-Strength Protection, Total Reliability

Combining excellent winter performance, puncture-resistant design, long tread life, and high load capacity, it withstands harsh cold and offers lasting durability. Whether on icy roads or heavy-duty transport, it handles every challenge with ease, ensuring comprehensive reliability for every trip.

Performance test:

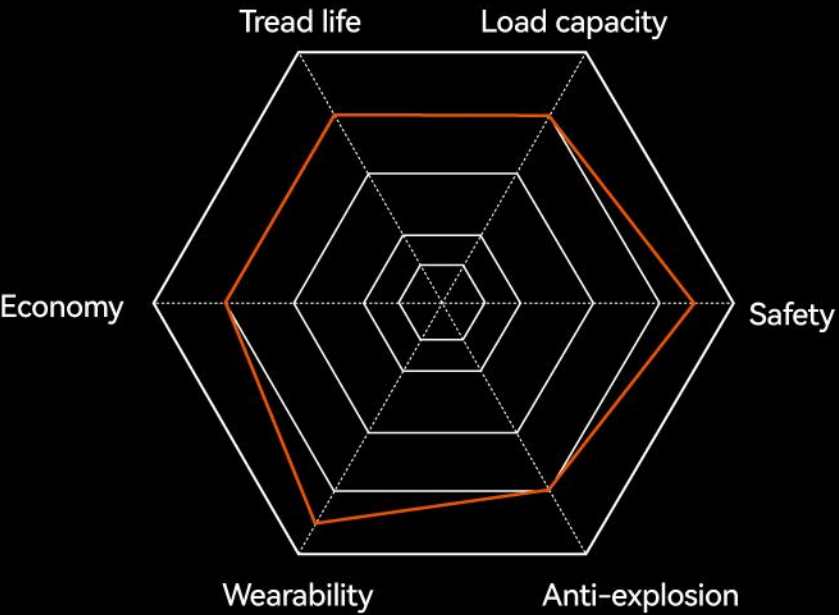



UNLEASH OFF-ROAD PASSION

INNOVATIVE PATTERN AND HIGH-RIGIDITY DESIGN DELIVER
EXCEPTIONAL STABILITY AND PROTECTION FOR THRILLING RIDES
EVEN ON THE MOST CHALLENGING ROADS.

WILDRANGER A/T

SIZE	INDEX	SIDEWALL DESCRIPTION	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL	SIZE	INDEX	SIDEWALL DESCRIPTION	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
215/65R16	98T	RWL	6.5J	686	221	300 44	500AB	-	-	-	265/65R18	114S	RWL	8.0J	801	272	300 44	-	-	-	-
LT245/75R16	120/116R	RWL	7.0J	774	248	550 80	-	-	-	-	285/60R18	116T	RWL	8.5J	799	292	300 44	-	-	-	-
LT275/60R20	123/120R	BSW	8.0J	838	279	550 80	-	-	-	-	265/50R20	111S	BSW	8.5J	774	277	340 50	-	-	-	-
31×10.50R15LT	109S	RWL	8.5J	775	268	350 50	-	-	-	-	275/55R20	117T	BSW	8.5J	810	284	340 50	-	-	-	-
215/75R15	100S	RWL	6.0J	703	216	300 44	500AB	-	-	-	275/60R20	115T	BSW	8.0J	838	279	300 44	-	-	-	-
235/75R15	105T	RWL	6.5J	733	235	300 44	500AB	-	-	-	275/60R20	119TXL	BSW	8.0J	838	279	340 50	-	-	-	-
265/70R15	112T	RWL	8.0J	753	272	300 44	500AB	-	-	-	285/50R20	116H	BSW	9.0J	794	297	340 50	-	-	-	-
215/70R16	100T	RWL	6.5J	708	221	300 44	500AB	-	-	-	285/55R20	119S	BSW	9.0J	822	297	340 50	-	-	-	-
225/70R16	103T	RWL	6.5J	722	228	300 44	500AB	-	-	-	245/75R15C	109/107S	RWL	7.0J	749	248	375 55	-	-	-	-
235/70R16	106S	RWL	7.0J	736	240	300 44	500AB	-	-	-	255/70R15C	112/110S	RWL	7.5J	739	260	375 55	-	-	-	-
245/70R16	107T	RWL	7.0J	750	248	300 44	500AB	-	-	-	205R16C	110/108S	RWL	6.0J	736	208	450 65	-	-	-	-
255/70R16	111T	RWL	7.5J	764	260	300 44	500AB	-	-	-	LT215/75R15	106/103S	RWL	6.0J	703	216	450 65	-	-	-	-
265/70R16	112T	RWL	8.0J	778	272	300 44	500AB	-	-	-	LT235/75R15	104/101R	RWL	6.5J	733	235	350 50	-	-	-	-
275/70R16	114T	RWL	8.0J	792	279	300 44	500AB	-	-	-	LT225/75R16	115/112R	RWL	6.0J	744	223	550 80	-	-	-	-
225/60R17	99H	RWL	6.5J	702	228	300 44	500AB	-	-	-	LT235/85R16	120/116R	RWL	6.5J	806	235	550 80	-	-	-	-
235/65R17	108T	RWL	7.0J	738	240	340 50	500AB	-	-	-	LT245/70R16	118/115S	RWL	7.0J	750	248	550 80	-	-	-	-
245/65R17	111T	RWL	7.0J	750	248	340 50	500AB	-	-	-	LT265/70R16	121/118S	RWL	8.0J	778	272	550 80	-	-	-	-
255/65R17	110T	RWL	7.5J	764	260	300 44	500AB	-	-	-	LT265/75R16	123/120S	RWL	7.5J	804	267	550 80	-	-	-	-
265/65R17	112S	RWL	8.0J	776	272	300 44	500AB	-	-	-	LT285/75R16	126/123Q	RWL	8.0J	834	286	550 80	-	-	-	-
265/70R17	115T	RWL	8.0J	804	272	300 44	500AB	-	-	-	LT245/70R17	119/116S	RWL	7.0J	776	248	550 80	-	-	-	-
235/60R18	107HXL	RWL	7.0J	739	240	340 50	500AB	-	-	-	LT245/75R17	121/118S	RWL	7.0J	800	248	550 80	-	-	-	-
235/60R18	103T	RWL	7.0J	739	240	300 44	500AB	-	-	-	LT265/70R17	123/120S	RWL	8.0J	804	272	550 80	-	-	-	-
245/60R18	105T	RWL	7.0J	751	248	300 44	500AB	-	-	-	LT285/70R17	126/123s	RWL	8.5J	832	292	550 80	-	-	-	-
255/60R18	112T	RWL	7.5J	763	260	340 50	500AB	-	-	-	LT275/65R18	123/120S	RWL	8.0J	815	279	550 80	-	-	-	-
255/60R18	112H	RWL	7.5J	763	260	340 50	500AB	-	-	-	LT275/55R20	120/117R	BSW	8.5J	810	284	550 80	-	-	-	-
265/60R18	114H	RWL	8.0J	775	272	340 50	500AB	-	-	-	LT285/55R20	122/119S	BSW	9.0J	822	297	550 80	-	-	-	-

DOMINATE OFF-ROAD WITH CONFIDENCE

DIAMOND CHAMFER AND MULTIPLE PROTECTION FEATURES
PROVIDE SUPERIOR GRIP AND DURABILITY FOR FEARLESS
OFF-ROAD ADVENTURES.



WILDRANGER M/T



Drainage



4 season



Oil



Stability

DIAMOND CHAMFER PATTERN BLOCK

- The diamond-like pattern block chamfered corner design provides excellent ornamentality, whether it is static or dynamic, and perfectly shows the high-end sense of appearance.
- At the same time, it ensures the performance in harsh road conditions and fully meets the needs of off-road enthusiasts.

DYNAMIC ADSORPTION GROOVES

- Designed for rock climbing off-road enthusiasts, this feature incorporates grooves in the center of the tread block, along with a polygonal steel sheet layout. It enhances the dynamic absorption effect of the tread, making it resilient in harsh environments and providing powerful handling for off-road adventurers.





DIVERSION TYPE SIDEWALL FLOWERS

- The sidewall is added to the diversion sidewall design, which can quickly shake off the mud, snow and sand when dealing with the mud and snow road or gravel road keep the sidewall dry, improve the ability of the tyre to get out of trouble, and further increase the safety of off-road.

MULTIPLE ARMOR PROTECTION

- The multi-armor protection design gives the tyre an overall ultra-high rigidity and can easily cope with all kinds of harsh conditions. It can effectively prevent sharp rock walls and rock fragments from piercing or cutting the carcass, providing a solid backing for off-road enthusiasts to explore the unknown without fear of difficulty.

Off-Road Power, Unstoppable Performance


Engineered for challenging terrains, this design delivers exceptional grip and durability. Whether tackling rugged mountain trails or uneven roads, it provides stable support, making every off-road journey confident and exhilarating.

Explosion Protection, Peace of Mind

With innovative anti-burst technology, it offers extra safety for every drive. Enhanced resistance to pressure and damage ensures greater security on unpredictable roads, delivering a more stable and lasting driving experience.

All-Round Safety, Worry-Free Driving

Combining precision engineering and premium materials, it offers comprehensive safety. From high-speed drives and sudden braking to tough road conditions, it ensures steady grip and accurate handling, minimizing risks and making every trip safer and more secure.

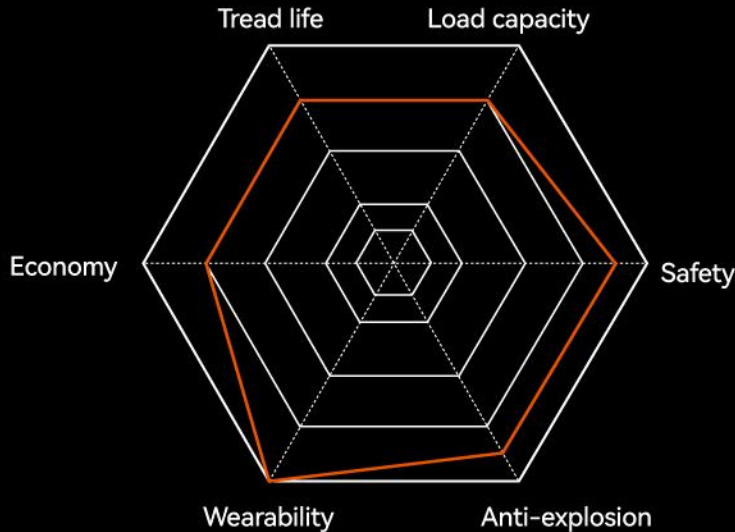

WILDRANGER M/T

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
35×12.50R20LT	121Q	10.0J	877	318	450 65	-	-	-	-
LT265/75R16	123/120Q	7.5J	804	267	550 80	-	-	-	-
LT235/70R16	110/107Q	7.0J	736	240	450 65	-	-	-	-
LT305/70R16	124/121Q	9.0J	834	311	450 65	-	-	-	-
LT265/65R17	120/117Q	8.0J	776	272	550 80	-	-	-	-
35×12.50R15LT	113Q	10.0J	877	318	250 35	-	-	-	-
33×12.50R15LT	108Q	10.0J	826	318	250 35	-	-	-	-
33×12.50R17LT	120Q	10.0J	826	318	450 65	-	-	-	-
35×12.50R17LT	121Q	10.0J	877	318	450 65	-	-	-	-
33×12.50R18LT	118Q	10.0J	826	318	450 65	-	-	-	-
35×12.50R18LT	123Q	10.0J	877	318	450 65	-	-	-	-
33×12.50R20LT	114Q	10.0J	826	318	450 65	-	-	-	-
LT235/75R15	104/101Q	6.5J	733	235	350 50	-	-	-	-
LT235/85R16	120/116Q	6.5J	806	235	550 80	-	-	-	-
LT245/70R16	118/115Q	7.0J	750	248	550 80	-	-	-	-
LT245/75R16	120/116Q	7.0J	774	248	550 80	-	-	-	-
LT285/75R16	126/123Q	8.0J	834	286	550 80	-	-	-	-
LT265/70R17	123/120Q	8.0J	804	272	550 80	-	-	-	-
LT285/70R17	122/119Q	8.5J	832	292	450 65	-	-	-	-
31×10.50R15LT	109Q	8.5J	775	268	350 50	-	-	-	-

VAN

Vans are for city roads, highways, and rural roads, with some 4WD models capable of handling mountainous and tough terrains. They offer spacious interiors, versatile uses, and combine passenger comfort with cargo capacity, making them a practical choice for various scenarios.

VANTOUR

LOADKING

VANMARCH





Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.




Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.



Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.

Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

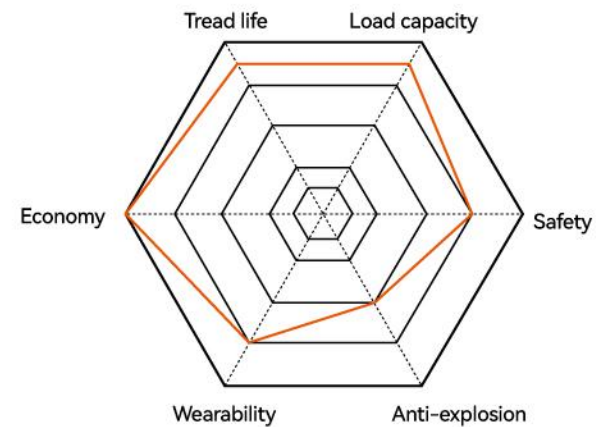

VANTOUR

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQ	G	RR	WG	SL
145R12C	86/84Q	4.00B	542	147	450 65	-	C	B	72	
155R12C	88/86Q-8PR	4.50B	550	157	450 65	-	C	B	72	
155R13C	85/83Q-6PR	4.50B	578	157	350 50	-	C	B	72	
155R13C	90/88Q-8PR	4.50B	578	157	450 65	-	C	B	72	
165/70R13C	88/86S	5.00B	562	170	375 55	-	C	B	72	
165R13C	94/93R	4.50B	596	167	450 65	-	0	0	0	
165R13C	91/89R	4.50B	596	167	375 55	-	C	B	72	
165/70R14C	89/87R-6PR	5J	588	170	375 55	-	C	B	72	
175/65R14C	90/88T-6PR	5J	584	177	375 55	-	C	B	72	
175R14C	99/98R	5J	634	178	450 65	-	C	B	72	
175/70R14C	95/93S	5J	602	177	375 55	-	C	B	72	
185R14C	102/100R	5½J	650	188	450 65	-	C	B	72	
195R14C	106/104R	5½J	666	198	450 65	-	C	B	72	
205R14C	109/107R	6J	686	208	450 65	-	C	B	72	
195R15C	106/104R	5½J	693	196	450 65	-	C	B	72	

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQ	G	RR	WG	SL
195/70R15C	104/102R	6J	655	201	450 65	-	C	B	72	
205/70R15C	106/104R	6J	669	209	450 65	-	C	B	72	
215/65R15C	104/102R	6½J	661	221	375 55	-	C	B	72	
215/70R15C	109/107R	6½J	683	221	450 65	-	C	B	72	
225/70R15C	112/110R	6½J	697	228	450 65	-	C	B	72	
175/75R16C	101/99R	5J	668	177	475 69	-	C	B	72	
185/75R16C	104/102R	5J	684	184	475 69	-	C	B	72	
195/65R16C	104/102R	6J	660	201	475 69	-	C	B	72	
195/75R16C	107/105R	5½J	698	196	475 69	-	C	B	72	
205/65R16C	107/105T	6J	672	209	475 69	-	C	B	72	
205/75R16C	110/108R	5½J	714	203	475 69	-	C	B	72	
215/65R16C	109/107T	6½J	686	221	475 69	-	C	B	72	
215/75R16C	113/111R	6J	728	216	475 69	-	C	B	72	
225/65R16C	112/110T	6½J	698	228	475 69	-	C	B	72	
235/65R16C	115/113R	7J	712	240	475 69	-	C	B	72	

LOADKING




All-season tread design with long tread life.



Double steel belts plies and double full jointless nylon cap plies improve handling stability and durability.



Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability.
Wide circumferential grooves helps to evacuate water quickly and efficiently.

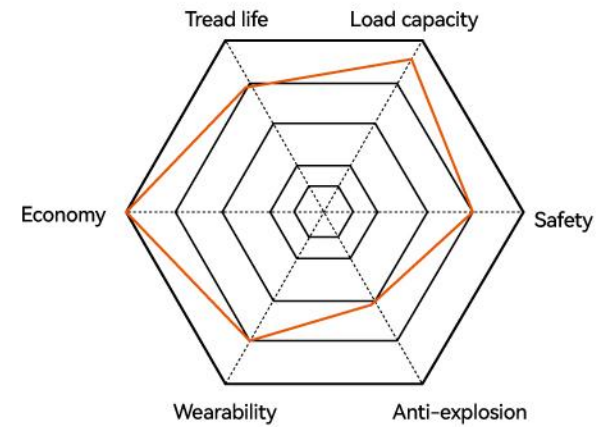

LOADKING

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
185/75R16C	104/102R	5J	684	184	475	69	-	-	-	-
195/75R16C	107/105R	5½J	698	196	475	69	-	-	-	-
225/75R16C	121/120R	6.0J	744	223	575	85	-	-	-	-



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kind of road conditions.




Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.



Reinforced structure and special abrasion resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

White sidewall rib shows extraordinary appearance.

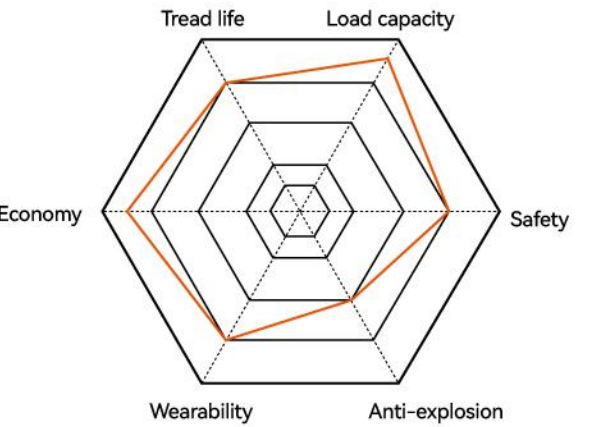

WHITE SIDEWALL



VANMARCH

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
155R13C	85/83R	4.50B	578	157	350	50	-	-	-	-
155R13C	90/88R	4.50B	578	157	450	65	-	-	-	-
165R13C	94/93R	4.50B	596	167	450	65	-	-	-	-
165R13C	91/89R	4.50B	596	167	375	55	-	-	-	-
185R14C	102/100R	5½J	650	188	450	65	-	-	-	-
195R14C	106/104R	5½J	666	198	450	65	-	-	-	-
205/75R14C	109/107R	5½J	664	203	475	69	-	-	-	-
185R15C	103/102R	5½J	674	188	450	65	-	-	-	-
195R15C	106/104R	5½J	693	196	450	65	-	-	-	-
205/75R15C	109/107R	5½J	689	203	475	69	-	-	-	-




POWERMARCH A/S II POWERMARCH VAN A/S POWERMARCH A/S

Whether it's the cold winter, slippery spring and autumn, or hot summer, it provides your car with excellent grip and stability. Its innovative tread design and high-performance rubber compound ensure safe driving in all weather conditions.

4-SEASON


POWERMARCH A/S II



Water wave shaped steel plate design
The steel plate adopts a corrugated design to meet the grip of the tyre in all directions, improving driving stability and handling.



Z-shaped longitudinal groove design
Longitudinal zigzag grooves are beneficial for piercing the water film on the road surface, ensuring the ability to travel on wet and slippery roads.



Narrow intercept design
Narrow intercept can optimize tire dynamic performance, reduce noise, and lower rolling resistance.




POWERMARCH A/S II

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER MM		PERMISSIVE PRESSURE					
195/55R16	87V	6J	620	201	300	44	320/A/A	C	C	71
205/55ZR16	94WXL	6½J	632	214	340	50	320/A/A	C	C	71
215/55ZR16	97WXL	7J	642	226	340	50	320/A/A	C	C	71
205/40ZR17	84WXL	7½J	596	212	340	50	320/A/A	C	C	71
215/40ZR17	87WXL	7½J	604	218	340	50	320/A/A	C	C	71
225/45ZR17	94WXL	7½J	634	225	340	50	320/A/A	C	C	71
245/45ZR17	99WXL	8J	652	243	340	50	320/A/A	C	C	71
205/50ZR17	93WXL	6½J	638	214	340	50	320/A/A	C	C	71
215/50ZR17	95WXL	7J	648	226	340	50	320/A/A	C	C	71
225/50ZR17	98WXL	7J	658	233	340	50	320/A/A	C	C	71
205/55ZR17	95WXL	6½J	658	214	340	50	320/A/A	C	C	71
215/55ZR17	98WXL	7J	668	226	340	50	320/A/A	C	C	71
225/55ZR17	101WXL	7J	680	233	340	50	320/A/A	C	C	71
235/55ZR17	103WXL	7½J	690	245	340	50	320/A/A	C	C	71
235/65R17	108VXL	7J	738	240	340	50	320/A/A	C	C	71
225/40ZR18	92WXL	8J	637	230	340	50	320/A/A	C	C	71
225/45ZR18	95WXL	7½J	659	225	340	50	320/A/A	C	C	71
215/50ZR18	92W	7J	673	226	300	44	320/A/A	C	C	71
215/55R18	99VXL	7J	693	226	340	50	320/A/A	C	C	71
235/45ZR18	98WXL	8J	669	236	340	50	320/A/A	C	C	71
235/55R18	104VXL	7½J	715	245	340	50	320/A/A	C	C	71
235/60R18	107VXL	7J	739	240	340	50	320/A/A	C	C	71
245/40ZR18	97WXL	8½J	653	248	340	50	320/A/A	C	C	71
245/45ZR18	100WXL	8J	677	243	340	50	320/A/A	C	C	71
205/55ZR19	97WXL	6½J	709	214	340	50	320/A/A	C	C	71

SIZE	INDEX	RIM	OA.	WIDTH	MAX		UTQG	RR	WG	SL
			DIAMETER MM		PERMISSIVE PRESSURE					
225/35ZR19	88WXL	8J	641	230	340	50	320/A/A	C	C	71
225/40ZR19	93WXL	8J	663	230	340	50	320/A/A	C	C	71
225/45ZR19	96WXL	7½J	685	225	340	50	320/A/A	C	C	71
225/55ZR19	99W	7J	731	233	300	44	320/A/A	C	C	71
235/35ZR19	91WXL	8½J	647	241	340	50	320/A/A	C	C	71
235/55ZR19	105WXL	7½J	741	245	340	50	320/A/A	C	C	71
245/40ZR19	98WXL	8½J	679	248	340	50	320/A/A	C	C	71
245/45ZR19	102WXL	8J	703	243	340	50	320/A/A	C	C	71
255/35ZR19	96WXL	9J	661	260	340	50	320/A/A	C	C	73
255/40ZR19	100WXL	9J	687	260	340	50	320/A/A	C	C	73
195/50R20	93HXL	6J	704	201	340	50	320/A/A	C	C	71
195/55R20	95HXL	6J	722	201	340	50	320/A/A	C	C	71
185/65R14	86H	5½J	596	189	300	44	320/A/A	C	D	70
185/70R14	88H	5½J	616	189	300	44	320/A/A	C	D	70
195/60R15	88H	6J	615	201	300	44	320/A/A	C	C	71
195/65R15	91H	6J	635	201	300	44	320/A/A	C	C	71
205/65R15	94V	6J	647	209	300	44	320/A/A	C	C	71
175/65R14	86TXL	5J	584	177	340	50	320/A/A	C	D	70
175/65R15	84H	5J	609	177	300	44	320/A/A	C	D	70
185/55R15	82V	6J	585	194	300	44	320/A/A	C	D	70
185/60R15	88HXL	5½J	603	189	340	50	320/A/A	C	D	70
185/65R15	92TXL	5½J	621	189	340	50	320/A/A	C	D	70
205/60R16	96HXL	6J	652	209	340	50	320/A/A	C	C	71
215/60R16	99HXL	6½J	664	221	340	50	320/A/A	C	C	71
215/65R16	102HXL	6½J	686	221	340	50	320/A/A	C	C	71
205/45ZR17	88WXL	7J	616	206	340	50	320/A/A	C	C	71



POWERMARCH VAN A/S



M+S	
RIM SIZE	14-17
SERIES	55-75
SPEED RATING	H-T




V-shaped embedding design
The embedded single directional pattern enhances visual perception while improving driving stability.



Z-shaped wide groove design
Wide ditches can provide smooth drainage performance, while Z-shaped sharp edges can effectively penetrate water films and penetrate deep into snowy roads, providing more comprehensive grip performance.



Polygon integrated design
Single lines form polygonal pattern blocks, improving overall visual coordination. Sharp edges further enhance visual impact.




Dynamic groove design
The outer center of the pattern block is equipped with a dynamic square groove, which increases the grip of the vehicle during starting and braking, while providing stronger maneuverability.

POWERMARCH VAN A/S


SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
175/65R14C	90/88T	5J	584	177	375	55	-/-/-	C	B	72
175/70R14C	95/93T	5J	602	177	375	55	-/-/-	C	B	72
195/70R15C	104/102R	6J	655	201	450	65	-/-/-	C	B	72
205/70R15C	106/104R	6J	669	209	450	65	-/-/-	C	B	72
215/65R15C	104/102T	6½J	661	221	375	55	-/-/-	C	B	72
215/70R15C	109/107R	6½J	683	221	450	65	-/-/-	C	B	72
225/70R15C	112/110R	6½J	697	228	450	65	-/-/-	C	B	72
185/75R16C	104/102R	5J	684	184	475	69	-/-/-	C	B	72
195/60R16C	99/97H	6J	640	201	375	55	-/-/-	C	B	72
195/65R16C	104/102T	6J	660	201	475	69	-/-/-	C	B	72
195/75R16C	107/105R	5½J	698	196	475	69	-/-/-	C	B	72
205/65R16C	107/105T	6J	672	209	475	69	-/-/-	C	B	72
205/75R16C	113/111R	5½J	714	203	525	75	-/-/-	C	B	72
215/60R16C	103/101T	6½J	664	221	375	55	-/-/-	C	B	72
215/65R16C	109/107T	6½J	686	221	475	69	-/-/-	C	B	72
215/75R16C	113/111R	6J	728	216	475	69	-/-/-	C	B	72
225/65R16C	112/110R	6½J	698	228	475	69	-/-/-	C	B	72
225/75R16C	121/120R	6J	744	223	575	85	-/-/-	C	B	72
235/65R16C	115/113R	7J	712	240	475	70	-/-/-	C	B	72
215/60R17C	109/107T	6½J	690	221	475	69	-/-/-	C	B	72
225/55R17C	109/107H	7J	680	233	475	69	-/-/-	C	B	72




POWERMARCH A/S



Four wide circumferential tread grooves, effectively improve the wet performance, ensure excellent handling performance under raining and snowing weather.




Asymmetric pattern design, the middle block, effectively enhances the traction and safety on snow and ice road.



Tread formula takes the four seasons driving conditions and climate conditions into account driving control performance is excellent and stable, unobstructed Four Seasons.



The corrugated steel sipes on the blocks reduce the rigidity of blocks and improve the comfort when driving.

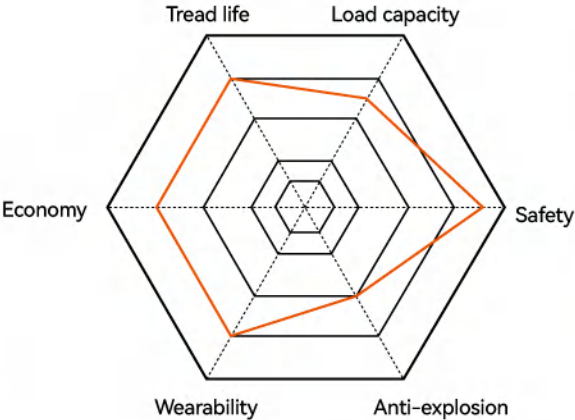

POWERMARCH A/S

SIZE	INDEX	RIM	OA. DIAMETER MM	MAX WIDTH MM	PERMISSIVE PRESSURE	UTQG	RR	WG	SL
155/65R13	73T	4.50B	532	157	300	44	420AA	D	C 71
155/70R13	75T	4.50B	548	157	300	44	420AA	D	C 71
155/80R13	79T	4.50B	578	157	300	44	420AB	D	C 71
165/70R13	79T	5.00B	562	170	300	44	420AA	D	C 71
175/65R13	80T	5.00B	558	177	300	44	420AA	D	C 71
175/70R13	82T	5.00B	576	177	300	44	420AA	D	C 71
155/65R14	75H	4½J	558	157	300	44	420AA	D	C 71
165/60R14	75H	5J	554	170	300	44	420AA	D	C 71
165/65R14	79H	5J	570	170	300	44	420AA	D	C 71
165/70R14	81H	5J	588	170	300	44	420AA	D	C 71
175/65R14	86TXL	5J	584	177	340	50	420AA	D	C 71
175/65R14	82H	5J	584	177	300	44	420AA	D	C 71
175/70R14	88TXL	5J	602	177	340	50	420AA	D	C 71
175/70R14	84H	5J	602	177	300	44	420AA	D	C 71
185/55R14	80H	6J	560	194	300	44	420AA	D	C 71
185/60R14	82H	5½J	578	189	300	44	420AA	D	C 71
185/65R14	86H	5½J	596	189	300	44	420AA	D	C 71
185/70R14	88H	5½J	616	189	300	44	420AA	D	C 71
175/55R15	77H	5½J	573	182	300	44	420AA	D	C 71
175/60R15	81H	5J	591	177	300	44	420AA	D	C 71
175/65R15	84H	5J	609	177	300	44	420AA	D	C 71
185/55R15	82V	6J	585	194	300	44	420AA	D	C 71
185/60R15	88HXL	5½J	603	189	340	50	420AA	D	C 71
185/65R15	92TXL	5½J	621	189	340	50	420AA	D	C 71
195/50R15	82V	6J	577	201	300	44	420AA	D	C 72
195/55R15	85V	6J	595	201	300	44	420AA	D	C 72
195/60R15	88H	6J	615	201	300	44	420AA	D	C 72
195/65R15	91H	6J	635	201	300	44	420AA	D	C 72
175/65R15	88TXL	5J	609	177	340	50	420AA	D	C 71
185/60R15	84H	5½J	603	189	300	44	420AA	D	C 71
185/65R15	88H	5½J	621	189	300	44	420AA	D	C 71
195/65R15	95HXL	6J	635	201	340	50	420AA	D	C 72
195/55R16	91VXL	6J	620	201	340	50	420AA	D	C 72

SIZE	INDEX	RIM	OA. DIAMETER MM	MAX WIDTH MM	PERMISSIVE PRESSURE	UTQG	RR	WG	SL
205/55R16	94VXL	6½J	632	214	340	50	420AA	D	C 72
205/60R16	96HXL	6J	652	209	340	50	420AA	D	C 72
215/55R16	97VXL	7J	642	226	340	50	420AA	D	C 72
215/60R16	99HXL	6½J	664	221	340	50	420AA	D	C 72
215/65R16	102HXL	6½J	686	221	340	50	420AA	D	C 72
225/45R17	94WXL	7½J	634	225	340	50	420AA	D	C 72
225/50R17	98WXL	7J	658	233	340	50	420AA	D	C 72
205/65R15	94V	6J	647	209	300	44	420AA	D	C 72
215/65R15	96H	6½J	661	221	300	44	420AA	D	C 72
195/45R16	84V XL	6½J	582	195	340	50	420AA	D	C 72
195/50R16	88V XL	6J	602	201	340	50	420AA	D	C 72
205/45R16	87W XL	7J	590	206	340	50	420AA	D	C 72
215/45R16	90VXL	7J	600	213	340	50	420AA	D	C 72
215/70R16	100H	6½J	708	221	300	44	420AA	D	C 72
225/55R16	99W XL	7J	654	233	340	50	420AA	D	C 72
205/45R17	88W XL	7J	616	206	340	50	420AA	D	C 72
205/50R17	93W XL	6½J	638	214	340	50	420AA	D	C 72
215/45R17	91W XL	7J	626	213	340	50	420AA	D	C 72
215/50R17	95W XL	7J	648	226	340	50	420AA	D	C 72
215/55R17	98W XL	7J	668	226	340	50	420AA	D	C 72
215/60R17	100V XL	6½J	690	221	340	50	420AA	D	C 72
225/55R17	101W XL	7J	680	233	340	50	420AA	D	C 72
225/60R17	103V XL	6½J	702	228	340	50	420AA	D	C 72
225/65R17	106V XL	6½J	724	228	340	50	420AA	D	C 72
235/45R17	97W XL	8J	644	236	340	50	420AA	D	C 72
235/55R17	103W XL	7½J	690	245	340	50	420AA	D	C 72
235/65R17	108V XL	7J	738	240	340	50	420AA	D	C 72
225/40ZR18	92Y XL	8J	637	230	340	50	420AA	D	C 72
225/45R18	95W XL	7½J	659	225	340	50	420AA	D	C 72
225/55R18	102V XL	7J	705	233	340	50	420AA	D	C 72
235/50R18	101W XL	7½J	693	245	340	50	420AA	D	C 72
245/40ZR18	97Y XL	8½J	653	248	340	50	420AA	-	- -
245/45ZR18	100Y XL	8J	677	243	340	50	420AA	-	- -



SNOW STUDDABLE tyres are specifically designed for extreme cold weather conditions, featuring advanced studdable technology for superior traction on icy and snowy roads. Whether you're driving on a frosty morning or through heavy snow, SNOW STUDDABLE tyres provide excellent grip, ensuring enhanced stability and safety on the road.

SNOWPRO STUD 01

SNOWPRO STUD 02

SNOW STUDDABLE

ICE & SNOW MASTER STEADY TRACTION

OPTIMAL SNOW STUDS AND INNOVATIVE DESIGN DELIVER EXCELLENT GRIP AND LOW NOISE WHILE ENSURING STEADY DRIVING ON ICY AND SNOWY ROADS.

SNOWPRO STUD 01



Drainage



Braking




Stability



Snow/Ice

APPROPRIATE NUMBER OF SNOW STUDS

- 150-200 snow studs, the optimal number, enables tyres to provide better silence and lower fuel consumption while maintaining ground traction than comparable products.

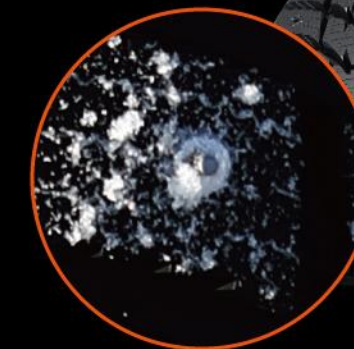

150-200

SNOW STUDS



WIDE V-SHAPED SINGLE GUIDE GROOVES

- Even on the melting snow and ice pavement, the wide V-shaped single guide grooves can effectively improve the drainage and mud discharge efficiency and ensure effective grip on the ground.

LOW STUD FALL OFF PROBABILITY

- Based on a new generation of silica nano-composites, the modulus design that matches the rigidity of the pin material makes the pin not slip during tyre driving, and exerts stable snow grasping performance.

TREAD CENTER CLAW DESIGN

- The sharp claw design in the center of tread ensures the straight running stability.

 Outstanding Fuel Efficiency, Saving Every Kilometer


This tire is designed with a focus on economic performance. Its optimized tread design and durable rubber effectively reduce rolling resistance, lowering fuel consumption. Even with long-term use, it maintains stable performance, helping you save on travel costs.

 Worry-Free Safety, Steady Performance

While ensuring stability during driving, the tire features advanced anti-slip technology, enhancing traction on wet roads and in harsh weather conditions. The precision tread structure and high-strength rubber provide excellent handling across various road conditions, offering reliable protection whether on city streets or highways.

 Durable and Explosion-Resistant, Heavy Load Capacity, Longer Lifespan

Incorporating advanced wear-resistant and anti-explosion technologies, this tire offers superior load-bearing capacity and a longer lifespan. The optimized tread design and high-strength materials ensure stable performance even under heavy loads, effectively reducing wear and extending the overall lifespan, whether for long drives or heavy-duty transport.

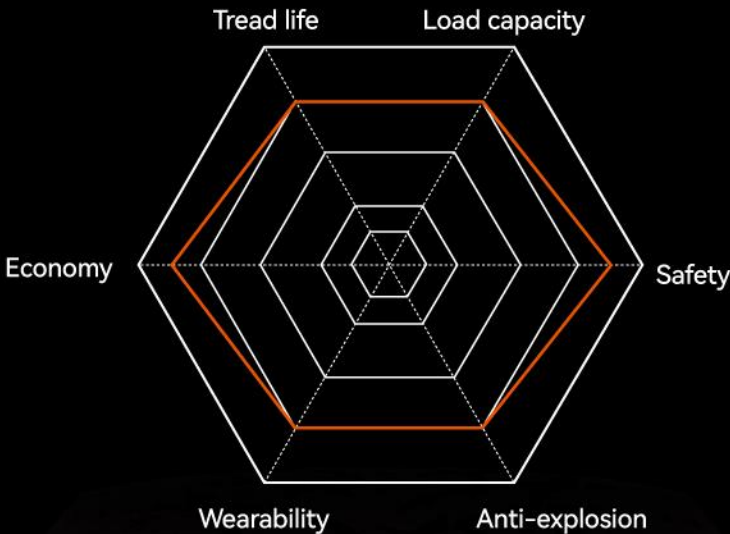

SNOWPRO STUD 01

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
155/70R13	75T	4½J	548	157	300	44	-	-	-
175/70R13	82T	5J	576	177	300	44	-	-	-
175/65R14	86TXL	5J	584	177	340	49	-	-	-
175/70R14	84T	5J	602	177	300	44	-	-	-
185/60R14	82T	5½J	578	189	300	44	-	-	-
185/65R14	90TXL	5½J	596	189	340	49	-	-	-
185/70R14	92TXL	5½J	616	189	340	49	-	-	-
185/55R15	86TXL	6J	585	194	340	49	-	-	-
185/60R15	88TXL	5½J	603	189	340	49	-	-	-
185/65R15	88T	5½J	621	189	300	44	-	-	-
195/55R15	85H	6J	595	201	300	44	-	-	-
195/60R15	92TXL	6J	615	209	340	49	-	-	-
195/65R15	95TXL	6J	635	201	340	49	-	-	-
205/65R15	94T	6J	647	209	300	44	-	-	-
205/55R16	94TXL	6½J	632	214	340	49	-	-	-
205/60R16	96TXL	6J	652	209	340	49	-	-	-
215/60R16	99TXL	6½J	664	221	340	49	-	-	-
215/65R16	102TXL	6½J	686	221	340	49	-	-	-
215/70R16	100T	6½J	708	221	300	44	-	-	-
185/75R16C	104/102R-8PR	5J	684	184	475	69	-	-	-
195/75R16C	107/105R-8PR	5½J	698	196	475	69	-	-	-
225/75R16C	118/116R-10PR	6J	744	223	525	76	-	-	-
195/50R15	82S	6J	577	201	300	44	-	-	-
205/70R15	96T	6J	669	209	300	44	-	-	-
195/55R16	91TXL	6J	620	201	340	49	-	-	-
205/75R15	97T	5.5J	689	203	300	44	-	-	-
215/55R16	97TXL	7J	642	226	340	49	-	-	-

MASTER THE FROSTY ROADS WITH WINTER TIRES!

SNOWPRO STUD 02



Comfort



High performance



Silence



Snow&Ice



SPECIAL ZIGZAG GROOVE DESIGN

- The zigzag pattern groove design provides superior traction on snowy surfaces.
- The special design of the groove edges and chamfers further enhances snow expulsion, improving traction on snow.



OPTIMIZED STUD HOLE DESIGN

Unique shaping around the stud holes effectively disperses the ice dust generated by the stud contacting the ground.

NEW TREAD COMPOUND FORMULA APPLICATION

A new generation of low glass transition temperature rubber composite materials can improve the adaptability of harsh environments such as severe cold. and the wide glass transition area ensures that the rubber formula is soft at low temperature, while maximizing the modulus retention rate, and widening the working temperature field of tyres. Keep the rubber elasticity.



WIDE PROFILE DESIGN

Optimized tread curve shape ensures even distribution of ground pressure. The wide driving surface and deeper grooves further enhance the tyre's acceleration and braking performance on snow.



 Durability That Lasts, Fearless Against Wear and Tear

Through dual optimization of materials and design, our tires are built to withstand long-term friction and wear. This not only extends product lifespan but also enhances performance stability and reliability. From precision engineering to superior formulations, our high-wear-resistant technology improves the tire's ability to resist abrasion, ensuring it performs like new under various road conditions and loads, meeting the demands of more intense driving.

 A Smart, Economical Choice

With reduced fuel consumption and extended tire lifespan, our tires strike the perfect balance between performance and cost-efficiency. Every choice becomes more intelligent, and every journey more efficient, allowing you to achieve greater value with fewer resources.

 Load-Bearing Strength, Ready for Any Challenge

Enhanced structural design and high-quality materials enable our tires to carry higher loads, evenly distributing pressure to ensure long-term stability and safety during transportation. Whether navigating busy logistics routes or complex deliveries, our exceptional load-bearing capacity provides reliable support throughout your journey.

 Longer Tread Life, More Miles Ahead


Optimized tread design and advanced material formulations significantly reduce wear and delay aging, extending the tire's life cycle. Whether for long-distance transportation or daily driving, a longer tread life reduces replacement frequency while providing greater cost-efficiency and reliability, ensuring confidence on every trip.

 Safety First, No Fear on Any Road

By optimizing tread patterns and material formulations, we enhance grip and braking performance, ensuring stability and control while driving. Whether on slippery surfaces or challenging conditions, our superior safety features ensure timely braking and peace of mind throughout your journey, providing comprehensive protection for you and your passengers.

M+S

RIM SIZE	14-21
SERIES	35-70
SPEED RATING	T-H

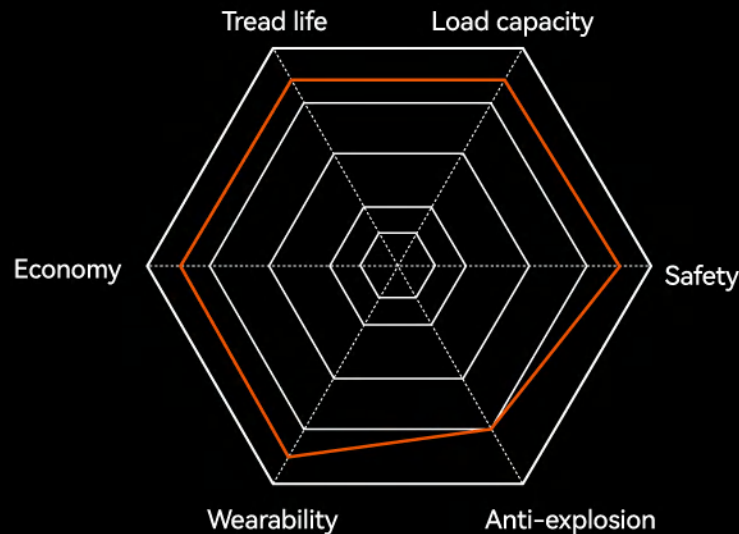

SNOWPRO STUD 02

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
225/70R16	107TXL	6½J	722	228	340 49	-	-	-	-
245/70R16	111TXL	7J	750	248	340 49	-	-	-	-
215/55R17	98TXL	7J	668	226	340 49	-	-	-	-
215/60R17	100TXL	6½J	690	221	340 49	-	-	-	-
225/65R17	106TXL	6½J	724	228	340 49	-	-	-	-
225/55R17	101HXL	7J	680	233	340 49	-	-	-	-
225/60R17	103TXL	6½J	702	228	340 49	-	-	-	-
265/65R17	112T	8J	776	272	300 44	-	-	-	-
215/55R18	95T	7J	693	226	300 44	-	-	-	-
225/55R18	102TXL	7J	705	233	340 49	-	-	-	-
225/60R18	104TXL	6½J	727	228	340 49	-	-	-	-
235/55R18	104TXL	7½J	715	245	340 49	-	-	-	-
235/60R18	103T	7J	739	240	300 44	-	-	-	-
235/50R19	103TXL	7½J	719	245	340 49	-	-	-	-
235/55R19	105TXL	7½J	741	245	340 49	-	-	-	-
245/55R19	107TXL	7½J	753	253	340 49	-	-	-	-
265/55R19	113TXL	8½J	775	277	340 49	-	-	-	-
235/55R20	102T	7½J	766	245	300 44	-	-	-	-
245/45R20	103TXL	8J	728	243	340 49	-	-	-	-
255/45R20	101T	8½J	738	255	300 44	-	-	-	-
265/50R20	111TXL	8½J	774	277	340 49	-	-	-	-
275/40R20	102T	9½J	728	278	300 44	-	-	-	-
285/50R20	112T	9J	794	297	300 44	-	-	-	-
315/35R20	106T	11J	728	320	300 44	-	-	-	-
265/45R21	104T	9J	771	266	300 44	-	-	-	-
295/40R21	107T	10½J	769	301	300 44	-	-	-	-

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
225/75R16	108TXL	6J	744	223	340 49	-	-	-	-
205/50R17	93TXL	6½J	638	214	340 49	-	-	-	-
215/50R17	95TXL	7J	648	226	340 49	-	-	-	-
225/45R17	94TXL	7½J	634	225	340 49	-	-	-	-
225/50R17	98HXL	7J	658	233	340 49	-	-	-	-
235/65R17	108TXL	7J	738	240	340 49	-	-	-	-
225/45R18	95TXL	7½J	659	225	340 49	-	-	-	-
235/45R18	98TXL	8J	669	236	340 49	-	-	-	-
235/65R18	110TXL	7J	763	240	340 49	-	-	-	-
265/60R18	114TXL	8J	775	272	340 49	-	-	-	-
225/45R19	96TXL	7½J	685	225	340 49	-	-	-	-
225/55R19	103TXL	7J	731	233	340 49	-	-	-	-
245/40R19	98TXL	8½J	679	248	340 49	-	-	-	-
245/45R19	102TXL	8J	703	243	340 49	-	-	-	-
255/45R19	104TXL	8.5J	713	255	340 49	-	-	-	-
255/50R19	107TXL	8J	739	265	340 49	-	-	-	-
245/50R20	105TXL	7.5J	754	253	340 49	-	-	-	-
255/50R20	109TXL	8J	764	265	340 49	-	-	-	-
255/55R20	110TXL	8J	788	265	340 49	-	-	-	-
275/45R20	110TXL	9J	756	273	340 49	-	-	-	-
275/45R21	110TXL	9J	781	273	340 49	-	-	-	-
265/40R22	106TXL	9.5J	771	271	340 49	-	-	-	-
275/40R22	107TXL	9.5J	778	278	340 49	-	-	-	-
235/35R19	9ITXL	8.5J	647	241	340 49	-	-	-	-
315/35R21	111TXL	11	753	320	340 49	-	-	-	-

SNOW

The Snow tyres are specially designed for icy and snowy roads, featuring a unique tread pattern and a flexible compound that ensures excellent grip and stability even in low temperatures. Whether it's snow-covered mountain roads or icy, slippery city streets, Snow tyres handle them with ease, providing a safer and worry-free driving experience during winter travels.

**SNOWTOUR
PRO**

**SNOWSTAR
PRO**

**SNOW
STAR**

**SNOWVAN
PRO**



**ICE X
PRO**

SNOWMARCH






SNOWTOUR PRO



Optimized horizontal groove design
The horizontal grooves of alternating thick and thin meet the safety of driving in the changeable snow.




V-shaped embedded pattern design
The embedded pattern design has both appearance and practicality, and the sharp angle pattern block can effectively replace the water film to enhance the grip.



Z-shaped longitudinal groove design
The zigzag-shaped longitudinal grooves help the blocks to stabilize on the snow surface, and can effectively cooperate to ensure the snow passing ability in the forward direction.

Rotation pattern
It satisfies the comfortable driving texture while improving the driving stability, improving the passability of the snow surface, and ensuring driving safety.

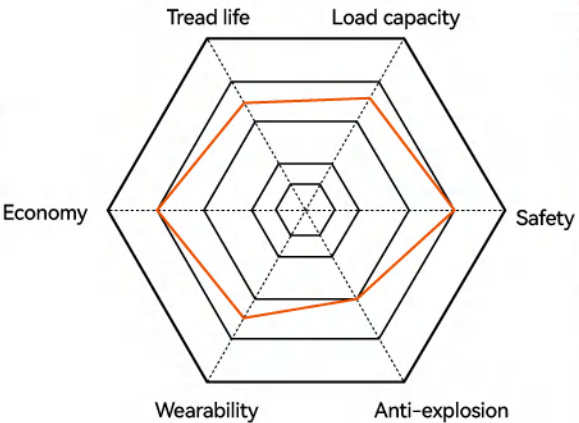



SNOWTOUR PRO

SIZE	INDEX	RIM	OA.	MAX	UTQG	RR	WG	SL	
			DIAMETER MM	WIDTH MM					
155/80R13	79T	4.5J	578	157	300	44	-	D	C 71
155/65R13	73T	4.5J	532	157	300	44	-	D	C 71
155/70R13	75T	4.5J	548	157	300	44	-	D	C 71
175/70R13	82T	5.0J	576	177	300	44	-	D	C 71
155/65R14	75T	4.5J	558	157	300	44	-	D	C 71
165/60R14	75T	5.0J	554	170	300	44	-	D	C 71
165/65R14	79T	5.0J	570	170	300	44	-	D	C 71
165/70R14	85TXL	5.0J	588	170	340	50	-	D	C 71
175/65R14	82T	5.0J	584	177	300	44	-	D	C 71
175/70R14	88TXL	5.0J	602	177	340	50	-	D	C 71
185/55R14	80T	6.0J	560	194	300	44	-	D	C 71
185/60R14	82T	5.5J	578	189	300	44	-	D	C 71
185/65R14	86T	5.5J	596	189	300	44	-	D	C 71
185/70R14	92TXL	5.5J	616	189	340	50	-	D	C 71
195/70R14	95TXL	6.0J	630	201	340	50	-	D	C 72
155/60R15	74T	4.5J	567	157	300	44	-	D	C 71
165/60R15	81TXL	5.0J	579	170	340	50	-	D	C 71
165/65R15	81T	5.0J	595	170	300	44	-	D	C 71
175/55R15	77T	5.5J	573	182	300	44	-	D	C 71
175/60R15	81T	5.0J	591	177	300	44	-	D	C 71
175/65R15	84T	5.0J	609	177	300	44	-	D	C 71
185/55R15	82H	6.0J	585	194	300	44	-	D	C 71
185/60R15	88HXL	5.5J	603	189	340	50	-	D	C 71
185/65R15	88H	5.5J	621	189	300	44	-	D	C 71
195/60R15	88H	6.0J	615	201	300	44	-	D	C 72

SIZE	INDEX	RIM	OA.	MAX	UTQG	RR	WG	SL	
			DIAMETER MM	WIDTH MM					
195/65R15	95TXL	6.0J	635	201	340	50	-	D	C 72
205/60R15	91H	6.0J	627	209	300	44	-	D	C 72
205/65R15	94H	6.0J	647	209	300	44	-	D	C 72
205/70R15	96T	6.0J	669	209	300	44	-	D	C 72
215/65R15	100HXL	6.5J	661	221	340	50	-	D	C 72
215/70R15	98T	6.5J	683	221	300	44	-	D	C 72
195/50R16	88HXL	6.0J	602	201	340	50	-	D	C 72
205/55R16	91H	6.5J	632	214	300	44	-	D	C 72
205/60R16	96HXL	6.0J	652	209	340	50	-	D	C 72
215/60R16	99HXL	6.5J	664	221	340	50	-	D	C 72
215/65R16	98H	6.5J	686	221	300	44	-	D	C 72
215/70R16	100T	6.5J	708	221	300	44	-	D	C 72
225/60R16	98H	6.5J	676	228	300	44	-	D	C 72
225/65R16	100H	6.5J	698	228	300	44	-	D	C 72
225/70R16	107TXL	6.5J	722	228	340	50	-	D	C 72
235/65R16	103H	7.0J	712	240	300	44	-	D	C 72
235/70R16	106T	7.0J	736	240	300	44	-	D	C 72
245/70R16	111TXL	7.0J	750	248	340	50	-	D	C 72
215/60R17	96H	6.5J	690	221	300	44	-	D	C 72
215/65R17	99H	6.5J	712	221	300	44	-	D	C 72
225/60R17	99H	6.5J	702	228	300	44	-	D	C 72
225/65R17	102T	6.5J	724	228	300	44	-	D	C 72
235/65R17	108TXL	7.0J	738	240	340	50	-	D	C 72
245/65R17	111TXL	7.0J	750	248	340	50	-	D	C 72



SNOWSTAR PRO




Asymmetric Tread Pattern

Designed to meet the performance needs of high-end sports cars, the wide inner grooves enhance drainage, while the dense outer tread blocks deliver exceptional handling performance.



Folding Grooves

These grooves improve overall fault tolerance, assist in vehicle stability, and enhance ultimate control, especially in challenging conditions.




Blade-Cut Angular Tread Blocks

The blade-cut design boosts grip and enhances the tire's ability to cut through water and snow. The 3D wavy steel sheet structure improves traction and increases tread hardness for superior handling in extreme conditions.

Silica Compound

The specialized silica formula ensures optimal softness on snowy surfaces, while strengthening the tread blocks to maintain superior control and performance.

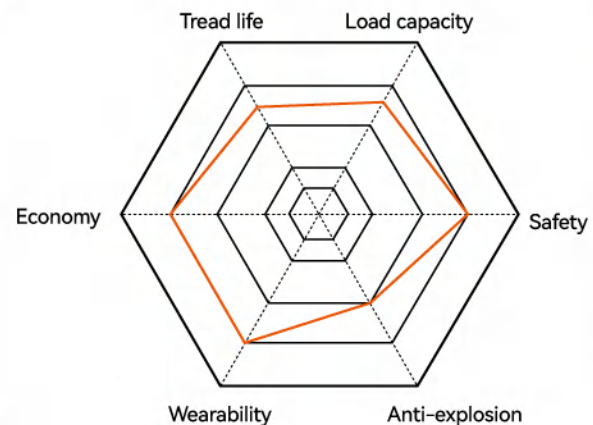

SNOWSTAR PRO

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
215/45R16	90HXL	7.0J	600	213	340	50	-	C	B	72
265/70R16	112H	8.0J	778	272	300	44	-	C	B	73
265/65R17	112T	8.0J	776	272	300	44	-	C	B	73
205/55R17	95VXL	6.5J	658	214	340	50	-	C	B	72
215/40R17	87VXL	7.5J	604	218	340	50	-	C	B	72
215/45R17	91VXL	7.0J	626	213	340	50	-	C	B	72
245/40R17	95VXL	8.5J	628	248	340	50	-	C	B	72
245/45R17	99VXL	8.0J	652	243	340	50	-	C	B	72
215/45R18	93VXL	7.0J	651	213	340	50	-	C	B	72
215/55R18	99VXL	7.0J	693	226	340	50	-	C	B	72
225/55R18	98V	7.0J	705	233	300	44	-	C	B	72
235/40R18	95VXL	8.5J	645	241	340	50	-	C	B	72
235/50R18	101VXL	7.5J	693	245	340	50	-	C	B	72
255/40R18	99VXL	9.0J	661	260	340	50	-	C	B	73
255/45R18	103VXL	8.5J	687	255	340	50	-	C	B	73
225/40R19	93VXL	8.0J	663	230	340	50	-	C	B	72
255/35R19	96VXL	9.0J	661	260	340	50	-	C	B	73
225/55R19	103VXL	7.0J	731	233	340	50	-	C	B	72
225/45R19	96VXL	7.5J	685	225	340	50	-	C	B	72
235/50R19	103VXL	7.5J	719	245	340	50	-	C	B	72
255/40R19	100VXL	9.0J	687	260	340	50	-	C	B	73
255/45R19	104VXL	8.5J	713	255	340	50	-	C	B	73
245/40R19	98VXL	8.5J	679	248	340	50	-	C	B	72
275/35R19	100VXL	9.5J	675	278	340	50	-	C	B	73
255/50R20	109VXL	8.0J	764	265	340	50	-	C	B	73
275/55R20	117HXL	8.5J	810	284	340	50	-	C	B	73
275/60R20	119HXL	8.0J	838	279	340	50	-	C	B	73

SNOW STAR



Snow&Ice



Comfort




High performance



Silence



Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance. The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.




Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

Special tread compound remains flexible at lower temperatures to make sure the grip on winter road conditions and reduce the rolling resistance.

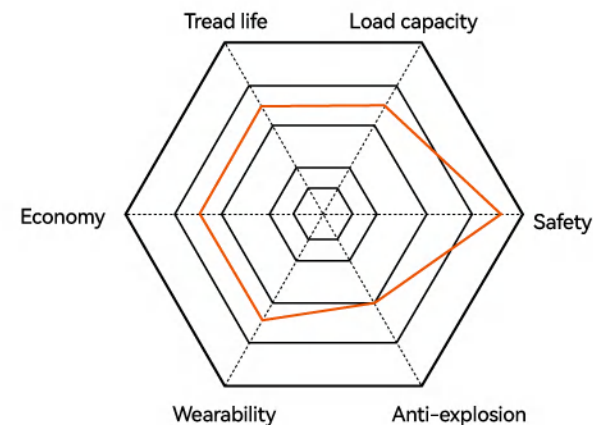



SNOW STAR

SIZE	INDEX	RIM	OA.	MAX	PERMISSIVE	UTQG	RR	WG	SL	
			DIAMETER	WIDTH						PRESSURE
			MM	MM						
165/70R13	79T	5J	562	170	300	44	-	D	D	71
185/60R14	82T	51/2J	578	189	300	44	-	D	D	71
195/50R15	82H	6J	577	201	300	44	-	D	D	72
195/55R15	85H	6J	595	201	300	44	-	D	D	72
195/60R15	88H	6J	615	201	300	44	-	D	D	72
195/65R15	91T	6J	635	201	300	44	-	D	D	72
195/65R15	91H	6J	635	201	300	44	-	D	D	72
195/65R15	95TXL	6J	635	201	340	50	-	D	D	72
195/55R16	91HXL	6J	620	201	340	50	-	D	D	72
205/55R16	91H	61/2J	632	214	300	44	-	D	D	72
205/55R16	94HXL	61/2J	632	214	340	50	-	D	D	72
215/55R16	97HXL	7J	642	226	340	50	-	D	D	72
225/55R16	99HXL	7J	654	233	340	50	-	D	D	72
205/50R17	93HXL	61/2J	638	214	340	50	-	D	D	72
205/50R17	93VXL	61/2J	638	214	340	50	-	D	D	72
215/50R17	95HXL	7J	648	226	340	50	-	D	D	72
215/50R17	95VXL	7J	648	226	340	50	-	D	D	72
215/55R17	98HXL	7J	668	226	340	50	-	D	D	72
215/55R17	98VXL	7J	668	226	340	50	-	D	D	72
225/45R17	94HXL	71/2J	634	225	340	50	-	D	D	72
225/45R17	94VXL	71/2J	634	225	340	50	-	D	D	72
225/50R17	98HXL	7J	658	233	340	50	-	D	D	72
225/50R17	98VXL	7J	658	233	340	50	-	D	D	72
225/55R17	101HXL	7J	680	233	340	50	-	D	D	72
225/55R17	101VXL	7J	680	233	340	50	-	D	D	72

SIZE	INDEX	RIM	OA.	MAX	PERMISSIVE	UTQG	RR	WG	SL
			DIAMETER	WIDTH					
			MM	MM					
235/45R17	97HXL	8J	644	236	340	50	-	D	D 72
235/55R17	103HXL	71/2J	690	245	340	50	-	D	D 72
225/40R18	92HXL	8J	637	230	340	50	-	D	D 72
225/40R18	92VXL	8J	637	230	340	50	-	D	D 72
225/45R18	95HXL	71/2J	659	225	340	50	-	D	D 72
235/45R18	98HXL	8J	669	236	340	50	-	D	D 72
235/45R18	98VXL	8J	669	236	340	50	-	D	D 72
235/55R18	104HXL	71/2J	715	245	340	50	-	D	D 72
235/60R18	107HXL	7J	739	240	340	50	-	D	D 72
245/40R18	97VXL	81/2J	653	248	340	50	-	D	D 72
245/45R18	100HXL	8J	677	243	340	50	-	D	D 72
245/45R18	100VXL	8J	677	243	340	50	-	D	D 72
245/60R18	105H	7J	751	248	300	44	-	D	D 72
255/55R18	109HXL	8J	737	265	340	50	-	D	D 73
255/55R18	109VXL	8J	737	265	340	50	-	D	D 73
235/55R19	105HXL	71/2J	741	245	340	50	-	D	D 72
245/45R19	102HXL	8J	703	243	340	50	-	D	D 72
255/50R19	107HXL	8J	739	265	340	50	-	D	D 73
255/55R19	111HXL	8J	763	265	340	50	-	D	D 73
275/40R19	105VXL	91/2J	703	278	340	50	-	D	D 73
275/40R20	106HXL	91/2J	728	278	340	50	-	D	D 73
275/45R20	110HXL	9J	756	273	340	50	-	D	D 73
315/35R20	110VXL	11J	728	320	340	50	-	D	D 75
265/45R21	108VXL	9J	771	266	340	50	-	D	D 73



SNOWVAN PRO



Optimized groove
It is beneficial to improve the stability of driving on ice and improve driving safety.




Optimized structure profile
The optimized structure profile is matched with dense and robust pattern blocks to meet the better carrying capacity of the vehicle.



Shoulder support
The Shoulder continuity pattern block can improve the strength of the tyre shoulder, improve the support effect with the ground, and ensure driving safety.

New steel sheet design
The optimized steel sheet structure can meet the requirement of antiskid performance and evenly disperse various stresses, so that the tread wear is more uniform and the wear resistance is improved.

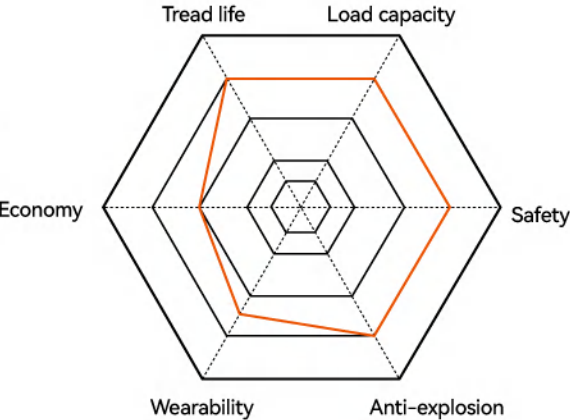

SNOWVAN PRO

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
165/70R14C	89/87R	5.0J	588	170	375	55	-	E	B	73
175/65R14C	90/88T	5.0J	584	177	375	55	-	E	B	73
175/70R14C	95/93T	5.0J	602	177	375	55	-	E	B	73
175R14C	99/98R	5.0J	634	178	450	65	-	E	B	73
185R14C	102/100R	5.5J	650	188	450	65	-	E	B	73
195/70R15C	104/102R	6.0J	655	201	450	65	-	E	B	73
215/65R15C	104/102R	6.5J	661	221	375	55	-	E	B	73
205/70R15C	106/104R	6.0J	669	209	450	65	-	E	B	73
215/70R15C	109/107R	6.5J	683	221	450	65	-	E	B	73
225/70R15C	112/110R	6.5J	697	228	450	65	-	E	B	73
175/75R16C	101/99R	5.0J	668	177	475	70	-	E	B	73
185/75R16C	104/102R	5.0J	684	184	475	70	-	E	B	73
195/60R16C	99/97T	6.0J	640	201	375	55	-	E	B	73
195/65R16C	104/102R	6.0J	660	201	475	70	-	E	B	73
195/75R16C	107/105R	5.5J	698	196	475	70	-	E	B	73
205/65R16C	107/105R	6.0J	672	209	475	70	-	E	B	73
205/75R16C	110/108R	5.5J	714	203	475	70	-	E	B	73
215/60R16C	103/101R	6.5J	664	221	375	55	-	E	B	73
215/65R16C	109/107R	6.5J	686	221	475	70	-	E	B	73
215/75R16C	113/111R	6.0J	728	216	475	70	-	E	B	73
225/65R16C	112/110R	6.5J	698	228	475	70	-	E	B	73
225/75R16C	121/120R	6.0J	744	223	575	85	-	E	B	73
235/65R16C	115/113R	7.0J	712	240	475	70	-	E	B	73



Snow&Ice




Comfort



High performance




Silence




Multi-directional groove distribution design

It is helpful to improve the stability of driving in ice surface and improve driving safety.



High-density 3D steel blade design

While ensuring the softness of the grounding surface of the tyre, the overall block strength is improved to ensure super grip and reduce driving lag.




Diamond cut corner design

It can effectively break through the water film, steadily pierce the ice surface and improve the anti-slip effect.

High-score white carbon black formula design

Improve tyre grip in cold environments and ensure the safety performance of tyres at low temperatures.

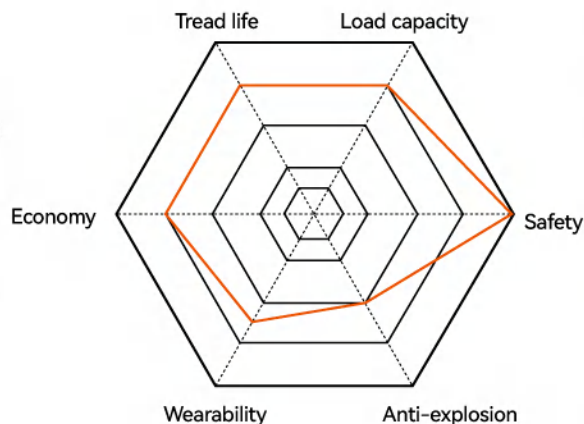

ICE X PRO

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
175/70R13	82S	5.0J	576	177	300 44	-	C	C	71
175/65R14	82S	5.0J	584	177	300 44	-	C	C	71
175/70R14	84S	5.0J	602	177	300 44	-	C	C	71
185/60R14	82S	5.5J	578	189	300 44	-	C	C	71
185/65R14	86S	5.5J	596	189	300 44	-	C	C	71
185/70R14	88S	5.5J	616	189	300 44	-	C	C	71
185/55R15	82S	6.0J	585	194	300 44	-	C	C	71
185/60R15	84S	5.5J	603	189	300 44	-	C	C	71
185/65R15	88S	5.5J	621	189	300 44	-	C	C	71
195/50R15	82S	6.0J	577	201	300 44	-	C	C	72
195/55R15	85S	6.0J	595	201	300 44	-	C	C	72
195/60R15	88S	6.0J	615	201	300 44	-	C	C	72
195/65R15	91S	6.0J	635	201	300 44	-	C	C	72
205/60R15	91S	6.0J	627	209	300 44	-	C	C	72
205/65R15	94S	6.0J	647	209	300 44	-	C	C	72
205/70R15	96S	6.0J	669	209	300 44	-	C	C	72
185/55R16	83S	6.0J	610	194	300 44	-	C	C	71
195/55R16	87S	6.0J	620	201	300 44	-	C	C	72
205/55R16	91S	6.5J	632	214	300 44	-	C	C	72
225/55R16	95S	7.0J	654	233	300 44	-	C	C	72
195/60R16	89S	6.0J	640	201	300 44	-	C	C	72
205/60R16	92S	6.0J	652	209	300 44	-	C	C	72

SIZE	INDEX	RIM	OA. DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE	UTQG	RR	WG	SL
215/55R16	93S	7.0J	642	226	300 44	-	C	C	72
215/60R16	95S	6.5J	664	221	300 44	-	C	C	72
215/65R16	98S	6.5J	686	221	300 44	-	C	C	72
215/70R16	100S	6.5J	708	221	300 44	-	C	C	72
225/70R16	107SXL	6.5J	722	228	340 50	-	C	C	72
235/70R16	106S	7.0J	736	240	300 44	-	C	C	72
215/45R17	91SXL	7.0J	626	213	340 50	-	C	C	72
215/50R17	95SXL	7.0J	648	226	340 50	-	C	C	72
215/60R17	96S	6.5J	690	221	300 44	-	C	C	72
225/45R17	94SXL	7.5J	634	225	340 50	-	C	C	72
225/50R17	98SXL	7.0J	658	233	340 50	-	C	C	72
215/55R17	94S	7.0J	668	226	300 44	-	C	C	72
225/55R17	97S	7.0J	680	233	300 44	-	C	C	72
235/55R17	99S	7.5J	690	245	300 44	-	C	C	72
225/60R17	99S	6.5J	702	228	300 44	-	C	C	72
225/65R17	102S	6.5J	724	228	300 44	-	C	C	72
235/65R17	108SXL	7.0J	738	240	340 50	-	C	C	72
245/45R17	95S	8J	652	243	300 44	-	C	C	72
265/65R17	112S	8.0J	776	272	300 44	-	C	C	73
285/65R17	116S	8.5J	802	292	300 44	-	C	C	75
185/75R16C	104/102R	5.0J	684	184	475 70	-	E	D	73
195/75R16C	107/105Q	5.5J	698	196	475 70	-	E	D	73



Two broad longitudinal plus two curved wide gutters, effectively improve the performance of the tyre wetland drainage, to ensure the excellent handling performance on rain-snow road.




Asymmetric pattern design, the pattern block in the middle, effectively enhances the traction and safety performance on snow-ice road.



A new generation of tread pattern design, featuring a lower temperature tread formulation and a softer composition compared to the previous generation, with a reduced Shore Hardness for enhanced performance.

A large number of corrugated steel block on the pattern, maintains maneuverability when contacting the road, and sharp edges can significantly enhance the traction in slippery and iceroad.

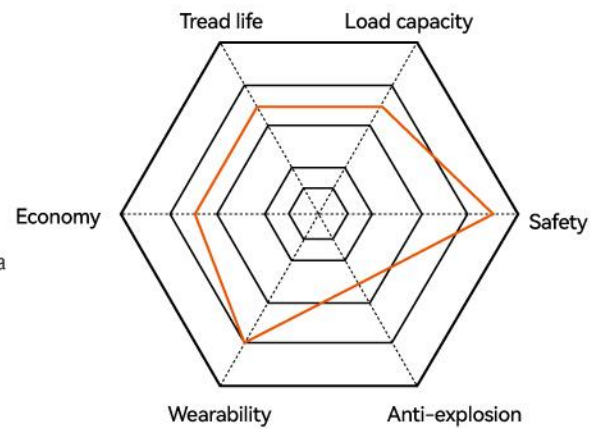

SNOWMARCH

SIZE	INDEX	RIM	OA.DIAMETER MM	WIDTH MM	MAX PERMISSIVE PRESSURE		UTQG	RR	WG	SL
175R14C	99/98R	5J	634	178	450	65	-	D	C	71
185R14C	102/100R	5 1/2J	650	188	450	65	-	D	C	71
195/60R16	89H	6J	640	201	300	44	-	D	C	72
205/55R16	91H	6 1/2J	632	214	300	44	-	D	C	72
225/65R17	102T	6 1/2J	724	228	300	44	-	D	C	72
235/55R19	105HXL	7 1/2J	741	245	340	50	-	D	C	72
245/55R19	107HXL	7 1/2J	753	253	340	50	-	D	C	72
245/50R20	102H	7 1/2J	754	253	300	44	-	D	C	73