



11F, Zhongtian Building A, No.38
Shandongtou Road,
Qingdao 266061, China
Tel: +86 532 67786222
Fax: +86 532 67786333
E-mail: info@vitourtires.com



VITOUR[®]

COMPETITION / PCR / SUV / LTR / SAND /
WSW / RWL





The TEMPESTA P1 is for drivers who know what it means to really push a car. Its optimized construction and tread design balances dry performance and wet traction, keeping you fully under control in extreme driving situations.



SEMI-SLICK TIRES

TEMPESTA P1

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	200/260	A	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
195/50R15	82W	--	6J	201	577	475	1047	300	44	5.6
195/55R15	85W	--	6J	201	595	515	1135	300	44	5.6
225/40R15	83W	--	8J	242	558	487	1074	300	44	5.6
245/35R15	84W	--	8½J	248	553	500	1102	300	44	5.6
285/30R15	88W	--	10J	304	551	560	1235	300	44	5.6
305/30R15	92W	--	11J	301	572	630	1389	300	44	5.6
225/45R17	94Y	XL	7½J	225	634	670	1477	340	49	5.6
245/40R17	95Y	XL	8½J	248	628	690	1521	340	49	5.6
285/30R17	95W	XL	10J	290	572	690	1521	340	49	5.6
225/40R18	92Y	XL	8J	230	637	630	1389	340	49	5.6
235/40R18	95W	XL	8½J	241	645	690	1521	340	49	5.6
245/40R18	97Y	XL	8½J	248	653	730	1609	340	49	5.6
255/35R18	94Y	XL	9J	260	635	670	1477	340	49	5.6
265/35R18	97W	XL	9½J	271	643	730	1609	340	49	5.6
295/30R18	98W	XL	10½J	301	635	750	1653	340	49	5.6
315/30R18	98W	--	11J	320	647	750	1653	300	44	5.6
345/30R18	107W	XL	12J	350	665	975	2149	340	49	5.6
235/35R19	91Y	XL	9J	260	661	710	1565	340	49	5.6
245/35R19	93Y	XL	8½J	248	655	650	1433	340	49	5.6
255/35R19	96Y	XL	9J	260	661	710	1565	340	49	5.6
265/35R19	98Y	XL	9½J	271	669	750	1653	340	49	5.6
275/35R19	100Y	XL	9½J	278	675	800	1764	340	49	5.6
295/25R19	94W	XL	10½J	301	631	670	1477	340	49	5.6
345/25R19	103W	XL	12½J	355	660	690	1521	300	49	5.6
255/35R20	97Y	XL	9J	260	686	730	1609	340	49	5.6
315/30R21	105Y	XL	11J	320	723	925	2039	340	49	5.6

TEMPESTA P1+

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	200/260	A	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
205/50R15	89W	XL	6½J	214	587	580	1279	340	49	5.6
205/45R16	87W	XL	7J	206	590	545	1201	340	49	5.6
205/55R16	94W	XL	6½J	214	632	670	1477	340	49	5.6
205/45R17	88Y	XL	7J	206	616	560	1235	340	49	5.6
215/45R17	91Y	XL	7J	213	626	615	1356	340	49	5.6
235/45R17	97Y	XL	8J	236	644	730	1609	340	49	5.6
235/40R17	94Y	XL	8½J	241	620	670	1477	340	49	5.6
215/40R18	89Y	XL	7½J	218	629	580	1279	340	49	5.6
245/35R18	92Y	XL	8½J	248	629	630	1389	340	49	5.6
265/40R18	101Y	XL	9½J	271	66	825	1819	340	49	5.6
275/35R18	99Y	XL	9½J	278	649	775	1709	340	49	5.6
235/40R19	96Y	XL	8½J	241	671	710	1565	340	49	5.6
245/40R19	98Y	XL	8½J	248	679	750	1653	340	49	5.6
255/30R19	91Y	XL	9J	260	637	615	1356	340	49	5.6
255/40R17	98W	XL	9J	260	636	750	1653	340	49	5.6
285/35R19	103Y	XL	10J	290	683	875	1929	340	49	5.6
305/30R19	102Y	XL	11J	313	667	850	1874	340	49	5.6
295/30R19	100Y	XL	10½J	301	661	800	1764	340	49	5.6
235/35R20	92Y	XL	8½J	241	672	630	1389	340	49	5.6
245/30R20	90Y	XL	8½J	248	656	600	1323	340	49	5.6
245/35R20	95Y	XL	8½J	248	680	690	1521	340	49	5.6
265/35R20	99Y	XL	9½J	271	694	775	1709	340	49	5.6
265/35R21	101Y	XL	9½J	271	719	825	1819	340	49	5.6
285/30R20	99Y	XL	10J	290	680	775	1709	340	49	5.6
285/35R20	104Y	XL	10J	290	708	900	1984	340	49	5.6
295/35R20	105Y	XL	10½J	301	714	925	2039	340	49	5.6
305/30R20	103Y	XL	11J	313	692	875	1929	340	49	5.6
305/30R21	104Y	XL	11J	313	717	900	1984	340	49	5.6
315/30R20	104Y	XL	11J	320	698	900	1984	340	49	5.6
325/30R20	106Y	XL	11½J	331	704	950	2094	340	49	5.6
295/25R21	96Y	XL	10½J	301	681	710	1565	340	49	5.6
325/30R21	108Y	XL	11½J	331	729	1000	2205	340	49	5.6
345/25R21	104W	XL	12½J	355	705	900	1984	340	49	5.6

The VITOUR TEMPESTA ENZO is an ultra-high performance sport tire that offers excellent handling ability in track driving conditions. The TEMPESTA ENZO provides superior control when cornering and braking.

TEMPESTA ENZO is engineered with technology inspired by racing. Designed for maximum grip under braking and cornering conditions the TEMPESTA ENZO responds to your driving in wet or dry conditions.

SEMI-SLICK TIRES
TEMPESTA ENZO



V-01R

Japan Technology

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	140	AA	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
165/55R14	72V	--	5.0	170	538	355	783	300	44	5.7
165/55R15	75V	--	5.0	170	563	387	853	300	44	5.7
195/50R15	82V	--	6.0	201	577	475	1047	300	44	5.7
205/50R15	86V	--	6.5	214	587	530	1168	300	44	5.7
205/45ZR16	87W	XL	7.0	206	590	545	1201	340	50	5.7
205/55ZR16	94W	XL	6.5	214	632	670	1477	340	50	5.7
205/45ZR17	88W	XL	7.0	206	616	560	1235	340	50	5.7
215/40ZR17	87W	XL	7.5	218	604	545	1201	340	50	5.7
215/45ZR17	91W	XL	7.0	213	626	615	1356	340	50	5.7
225/45ZR17	94W	XL	7.5	225	634	670	1477	340	50	5.7
235/40ZR17	94W	XL	8.5	241	620	670	1477	340	50	5.7
235/45ZR17	97W	XL	8.0	236	644	730	1609	340	50	5.7
245/40ZR17	95W	XL	8.5	248	628	690	1521	340	50	5.7
225/40ZR18	92W	XL	8.0	230	637	630	1389	340	50	5.7
235/40ZR18	95W	XL	8.5	241	645	690	1521	340	50	5.7
245/40ZR18	97W	XL	8.5	248	653	730	1609	340	50	5.7
255/35ZR18	94W	XL	9.0	260	635	670	1477	340	50	5.7
265/35ZR18	97W	XL	9.5	271	634	730	1609	340	50	5.7
265/40ZR18	101W	XL	9.5	271	669	825	1819	340	50	5.7
275/35ZR18	99W	XL	9.5	278	649	775	1709	340	50	5.7
285/35ZR18	101W	XL	10.0	290	657	825	1819	340	50	5.7
295/30ZR18	98W	XL	10.5	301	635	750	1653	340	50	5.7
305/35ZR18	105W	XL	11J	313	671	925	2039	340	50	5.7
235/35ZR19	91W	XL	8.5	241	647	615	1356	340	50	5.7
255/35ZR19	96W	XL	9J	260	661	710	1565	340	50	5.7
275/35ZR19	100W	XL	9.5J	278	675	800	1764	340	50	5.7



V-02R

Japan Technology

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	200	AA	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
165/55R14	72V	--	5.0	170	538	355	783	300	44	5.7
165/55R15	75V	--	5.0	170	563	387	853	300	44	5.7
195/50R15	82V	--	6.0	201	577	475	1047	300	44	5.7
205/50R15	86V	--	6.5	214	587	530	1168	300	44	5.7
205/45ZR16	87W	XL	7.0	206	590	545	1201	340	50	5.7
205/55ZR16	94W	XL	6.5	214	632	670	1477	340	50	5.7
205/45ZR17	88W	XL	7.0	206	616	560	1235	340	50	5.7
215/40ZR17	87W	XL	7.5	218	604	545	1201	340	50	5.7
215/45ZR17	91W	XL	7.0	213	626	615	1356	340	50	5.7
225/45ZR17	94W	XL	7.5	225	634	670	1477	340	50	5.7
235/40ZR17	94W	XL	8.5	241	620	670	1477	340	50	5.7
235/45ZR17	97W	XL	8.0	236	644	730	1609	340	50	5.7
245/40ZR17	95W	XL	8.5	248	628	690	1521	340	50	5.7
225/40ZR18	92W	XL	8.0	230	637	630	1389	340	50	5.7
235/40ZR18	95W	XL	8.5	241	645	690	1521	340	50	5.7
245/40ZR18	97W	XL	8.5	248	653	730	1609	340	50	5.7
255/35ZR18	94W	XL	9.0	260	635	670	1477	340	50	5.7
265/35ZR18	97W	XL	9.5	271	634	730	1609	340	50	5.7
265/40ZR18	101W	XL	9.5	271	669	825	1819	340	50	5.7
275/35ZR18	99W	XL	9.5	278	649	775	1709	340	50	5.7
285/35ZR18	101W	XL	10.0	290	657	825	1819	340	50	5.7
295/30ZR18	98W	XL	10.5	301	635	750	1653	340	50	5.7
305/35ZR18	105W	XL	11J	313	671	925	2039	340	50	5.7
235/35ZR19	91W	XL	8.5	241	647	615	1356	340	50	5.7
255/35ZR19	96W	XL	9J	260	661	710	1565	340	50	5.7
275/35ZR19	100W	XL	9.5J	278	675	800	1764	340	50	5.7




The pinnacle of VITOUR Tire Team's innovation—GALAXY M3. Born for those who pursue extraordinary driving experiences, it sets new benchmarks in stable grip, precise handling, and durability through unique design and masterful craftsmanship. Whether tackling daily urban commutes or occasional spirited drives, GALAXY M3 delivers confident feedback, ensuring every turn and acceleration is smooth and precise—harmonizing speed and passion for an exhilarating ride.



GALAXY M3

HIGH-TECH MATERIALS

Crafted with a precision blend of high-tech materials, GALAXY M3 guarantees performance, safety, and longevity. Its specially optimized tread compound significantly enhances tire strength and wear resistance while reducing rolling resistance and improving wet-surface performance.

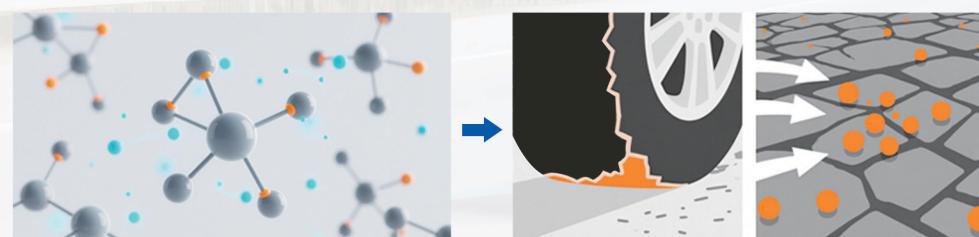

Featuring wide-angle steel belt arrangements, the tire maintains optimal shape and tread stability, delivering superior high-speed stability, handling, and unmatched comfort.



- Four symmetrical circumferential grooves ensure even longitudinal rigidity, enhancing straight-line stability and promoting uniform wear.
- Transverse shoulder grooves improve water evacuation, achieving shorter wet-braking distances than competitors.

- Asymmetric tread designs on inner and outer shoulders optimize different performance metrics—inner grooves prioritize wet safety ("water control"), while the outer shoulder's closed design boosts rigidity and responsiveness for sharp dry handling and cornering confidence.



- Steel blades within the tread blocks effectively disperse water films, preventing hydroplaning and enhancing wet grip.



Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
155/65R13	73T	--	4½J	157	532	365	805	300	44	5.5
155/70R13	75T	--	4½J	157	548	387	853	300	44	5.5
155/80R13	79T	--	4½J	157	578	437	963	300	44	5.5
165/65R13	77T	--	5J	170	544	412	908	300	44	5.5
165/70R13	79T	--	5J	170	562	437	963	300	44	5.5
165/80R13	83T	--	4½J	165	594	487	1074	300	44	5.5
175/60R13	77H	--	5J	177	540	412	908	300	44	5.5
175/70R13	82H	--	5J	177	576	475	1047	300	44	5.5
185/70R13	86T	--	5½J	189	590	530	1168	300	44	5.5
165/60R14	75T	--	5J	170	554	387	853	300	44	5.8
165/65R14	79T	--	5J	170	570	437	963	300	44	5.8
165/70R14	81T	--	5J	170	588	462	1019	300	44	5.8
175/60R14	79T	--	5J	177	566	437	963	300	44	5.8
175/65R14	82H	--	5J	177	584	475	1047	300	44	5.8
175/70R14	84H	--	5J	177	602	500	1102	300	44	5.8
185/60R14	82H	--	5½J	189	578	475	1047	300	44	5.8
185/65R14	86H	--	5½J	189	596	530	1168	300	44	5.8
185/70R14	88H	--	5½J	189	616	560	1235	300	44	5.8
195/60R14	86H	--	6J	201	590	530	1168	300	44	5.8
195/70R14	91T	--	6J	201	630	615	1356	300	44	5.8
205/60R14	88V	--	6J	209	602	560	1235	300	44	5.8
205/70R14	94T	--	6J	209	644	670	1477	300	44	5.8
215/70R14	96T	--	6½J	221	658	710	1565	300	44	5.8
175/65R15	84H	--	5J	177	609	500	1102	300	44	5.8
185/55R15	82H	--	6J	194	585	475	1047	300	44	5.8
185/60R15	84H	--	5½J	189	603	500	1102	300	44	5.8
185/65R15	88H	--	5½J	189	621	560	1235	300	44	5.8
195/50R15	82V	--	6J	201	577	475	1047	300	44	5.8
195/55R15	85V	--	6J	201	595	515	1135	300	44	5.8
195/60R15	88V	--	6J	201	615	560	1235	300	44	5.8

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
195/65R15	91V	--	6J	201	635	615	1356	300	44	5.8
205/60R15	91V	--	6J	209	627	615	1356	300	44	5.8
205/65R15	94V	--	6J	209	647	670	1477	300	44	5.8
205/70R15	96H	--	6J	209	669	710	1565	300	44	5.8
215/70R15	98H	--	6½J	221	683	750	1653	300	44	5.8
195/50R16	84V	--	6J	201	602	500	1102	300	44	5.8
195/55R16	87V	--	6J	201	620	545	1201	300	44	5.8
195/60R16	89H	--	6J	201	640	580	1279	300	44	5.8
205/55R16	91V	--	6½J	214	632	615	1356	300	44	5.8
205/60R16	92H	--	6J	209	652	630	1389	300	44	5.8
205/65R16	95H	--	6J	209	672	690	1521	300	44	5.8
215/60R16	95V	--	6½J	221	664	690	1521	300	44	5.8
215/65R16	98V	--	6½J	221	686	750	1653	300	44	5.8
225/60R16	98H	--	6½J	228	676	750	1653	300	44	5.8
205/45R17	88W XL	XL	7J	206	616	560	1235	340	49	5.8
205/50R17	93W XL	XL	6½J	214	638	650	1433	340	49	5.8
205/55R17	95W XL	XL	6½J	214	658	690	1521	340	49	5.8
215/45R17	91W XL	XL	7J	213	626	615	1356	340	49	5.8
215/50R17	95W XL	XL	7J	226	648	690	1521	340	49	5.8
215/55R17	98W XL	XL	7J	226	668	750	1653	340	49	5.8
215/60R17	96H	--	6½J	221	690	710	1565	300	44	5.8
225/45R17	94W XL	XL	7½J	225	634	670	1477	340	49	5.8
225/50R17	98W XL	XL	7J	233	658	750	1653	340	49	5.8
225/55R17	101W XL	XL	7J	233	680	730	1609	340	49	5.8
225/60R17	99V	--	6½J	228	702	775	1709	300	44	5.8
225/65R17	102H	--	6½J	228	724	850	1874	300	44	5.8
235/45R17	97W XL	XL	8J	236	644	730	1609	340	49	5.8
235/50R17	100W XL	XL	7½J	245	668	800	1764	340	49	5.8
235/55R17	103W XL	XL	7½J	245	690	875	1929	340	49	5.8
235/65R17	104V	--	7J	240	738	900	1984	300	44	5.8



SPORT M5

SPORT M5 Tread Pattern Characteristics:

3D cut-edge design for the lateral grooves, effectively strengthens the stiffness of the tread blocks, greatly reduces the initial irregular tread wearing.

Lateral grooves in "special step shape" design ensures the grip on wet land, improves the rigidity of tread blocks, enhances the handling performance & braking performance on dry land.



01

Optimally designed 3D active-mute bumps well-positioned in the bottom of the inner encircling vertical groove, works as the "Frequency Disturber" to reduce the tire noise and ensure a quite ride.



02



03

Closed shoulder design, effectively block the noise transmission by the central tread blocks, lessens the riding noises, strengthens the shoulder areas rigidity, ensures the perfect cornering performance.



04

Optimized designing in grooves arrangement, variable widths and angle transitions applied on all the lateral grooves, efficiently reduce the riding noise, enhances the maximum comfortable capability and water drainage performance, greatly increases the grip on wet road.



SPORT MS

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	320	AA	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
225/45R18	95Y	XL	7½J	225	659	690	1521	340	49	7.2
235/45R18	98Y	XL	8J	236	669	750	1653	340	49	7.2
245/40R18	97Y	XL	8½J	248	653	730	1609	340	49	7.2
245/45R18	100Y	XL	8J	243	677	800	1764	340	49	7.2
225/40R19	93Y	XL	8J	230	663	650	1433	340	49	7.2
235/45R19	99Y	XL	8J	236	695	775	1709	340	49	7.2
245/35R19	93Y	XL	8½J	248	655	650	1433	340	49	7.2
245/40R19	98Y	XL	8½J	248	679	750	1653	340	49	7.2
245/45R19	102Y	XL	8J	243	703	850	1874	340	49	7.2
245/55R19	107Y	XL	7½J	253	753	975	2149	340	49	7.2
255/35R19	96Y	XL	9J	260	661	710	1565	340	49	7.2
255/45R19	104Y	XL	8½J	255	713	900	1984	340	49	7.2
265/55R19	113W	XL	8½J	277	775	1150	2535	340	49	7.2
275/30R19	96Y	XL	9½J	278	649	710	1565	340	49	7.2
275/35R19	100Y	XL	9½J	278	675	800	1764	340	49	7.2
275/40R19	105Y	XL	9½J	278	703	925	2039	340	49	7.2
285/30R19	98Y	XL	10J	290	655	750	1653	340	49	7.2
285/40R19	107Y	XL	10J	290	711	975	2149	340	49	7.2
235/50R20	104Y	XL	7½J	245	744	900	1984	340	49	7.2
235/55R20	105Y	XL	7½J	245	766	925	2039	340	49	7.2
245/35R20	95Y	XL	8½J	248	680	690	1521	340	49	7.2
245/40R20	99Y	XL	8½J	248	704	775	1709	340	49	7.2
245/45R20	103Y	XL	8J	243	728	875	1929	340	49	7.2
255/40R20	101Y	XL	9J	260	712	825	1819	340	49	7.2
265/50R20	111W	XL	8½J	277	774	1090	2403	340	49	7.2
265/55R20	113W	XL	8½J	277	800	1150	2535	340	49	7.2
275/30R20	97Y	XL	9½J	278	674	730	1609	340	49	7.2
275/35R20	102Y	XL	9½J	278	700	850	1874	340	49	7.2

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
275/40R20	106Y	XL	9½J	278	728	950	2094	340	49	7.2
275/45R20	110Y	XL	9J	273	756	1060	2337	340	49	7.2
275/50R20	113W	XL	8½J	284	784	1150	2535	340	49	7.2
275/55R20	117W	XL	8½J	284	810	1285	2833	340	49	7.2
285/35R20	104Y	XL	10J	290	708	900	1984	340	49	7.2
285/50R20	116W	XL	9J	297	794	1250	2756	340	49	7.2
305/40R20	112Y	XL	11J	313	752	1120	2469	340	49	7.2
315/35R20	110Y	XL	11J	320	728	1060	2337	340	49	7.2
235/45R21	101Y	XL	8J	236	745	825	1819	340	49	7.2
245/35R21	96Y	XL	8½J	248	705	710	1565	340	49	7.2
245/40R21	100Y	XL	8½J	248	729	800	1764	340	49	7.2
245/45R21	104Y	XL	8J	243	753	900	1984	340	49	7.2
255/35R21	98Y	XL	9J	260	711	750	1653	340	49	7.2
265/35R21	101Y	XL	9½J	271	719	825	1819	340	49	7.2
255/40R21	102Y	XL	9J	260	737	850	1874	340	49	7.2
255/50R21	109W	XL	8J	265	789	1030	2271	340	49	7.2
265/30R21	96Y	XL	9½J	271	693	710	1565	340	49	7.2
265/45R21	108Y	XL	9J	266	771	1000	2205	340	49	7.2
275/30R21	98Y	XL	9½J	278	699	750	1653	340	49	7.2
275/35R21	103Y	XL	9½J	278	725	875	1929	340	49	7.2
275/40R21	107Y	XL	9½J	278	753	975	2149	340	49	7.2
275/45R21	110Y	XL	9J	273	781	1060	2337	340	49	7.2
275/50R21	113W	XL	8½J	284	809	1150	2535	340	49	7.2
285/30R21	100Y	XL	10J	290	705	800	1764	340	49	7.2
285/35R21	105Y	XL	10J	290	733	925	2039	340	49	7.2
285/40R21	109Y	XL	10J	290	761	1030	2271	340	49	7.2
285/45R21	113Y	XL	9½J	285	789	1150	2535	340	49	7.2
295/30R21	102Y	XL	10½J	301	711	850	1874	340	49	7.2



SPORT MS

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	320	AA	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
295/35R21	107Y	XL	10½J	301	739	975	2149	340	49	7.2
295/40R21	111Y	XL	10½J	301	769	1090	2403	340	49	7.2
305/25R21	98Y	XL	11J	313	685	750	1653	340	49	7.2
315/30R21	105Y	XL	11J	320	723	925	2039	340	49	7.2
315/35R21	111Y	XL	11J	320	753	1090	2403	340	49	7.2
315/40R21	115Y	XL	11J	320	785	1215	2679	340	49	7.2
315/45R21	116Y	XL	10½J	315	817	1250	2756	340	49	7.2
325/30R21	108Y	XL	11½J	3341	729	1000	2205	340	49	7.2
255/30R22	95Y	XL	9J	260	713	690	1521	340	49	7.2
255/35R22	99Y	XL	9J	260	737	775	1709	340	49	7.2
255/45R22	107Y	XL	8½J	255	789	975	2149	340	49	7.2
265/35R22	102Y	XL	9½J	271	745	850	1874	340	49	7.2
265/40R22	106Y	XL	9½J	271	771	950	2094	340	49	7.2
265/50R22	112W	XL	8½J	277	825	1120	2469	340	49	7.2
275/30R22	99Y	XL	9½J	278	725	775	1709	340	49	7.2
275/35R22	104Y	XL	9½J	278	751	900	1984	340	49	7.2
275/40R22	107Y	XL	9½J	278	779	975	2149	340	49	7.2
275/50R22	115W	XL	8½J	284	835	1215	2679	340	49	7.2
285/30R22	101Y	XL	10J	290	731	825	1819	340	49	7.2
285/35R22	106Y	XL	10J	290	759	950	2094	340	49	7.2
285/40R22	110Y	XL	10J	290	787	1060	2337	340	49	7.2
285/45R22	114Y	XL	9½J	285	815	1180	2601	340	49	7.2
295/25R22	97Y	XL	10½J	301	707	730	1609	340	49	7.2
295/30R22	103Y	XL	10½J	301	737	875	1929	340	49	7.2

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
295/35R22	108Y	XL	10½J	301	765	1000	2205	340	49	7.2
295/40R22	112Y	XL	10½J	301	795	1120	2469	340	49	7.2
305/40R22	114Y	XL	11J	313	803	1180	2601	340	49	7.2
305/45R22	118Y	XL	10J	303	833	1320	2910	340	49	7.2
315/25R22	101Y	XL	11½J	325	717	825	1819	340	49	7.2
315/30R22	107Y	XL	11J	320	749	975	2149	340	49	7.2
315/35R22	111Y	XL	11J	320	779	1090	2403	340	49	7.2
325/40R22	118Y	XL	11½J	331	819	1320	2910	340	49	7.2
325/35R22	114Y	XL	11½J	331	787	1180	2601	340	49	7.2
315/30R23	104Y	XL	9½J	278	776	900	1984	340	49	7.2
285/35R23	107Y	XL	10J	290	784	975	2149	340	49	7.2
285/40R23	111Y	XL	10J	290	812	1090	2403	340	49	7.2
295/35R23	108Y	XL	10½J	301	790	1000	2205	340	49	7.2
315/25R23	102Y	XL	11½J	325	742	850	1874	340	49	7.2
315/30R23	108Y	XL	11J	320	774	1000	2205	340	49	7.2
325/30R23	109Y	XL	11½J	331	780	1030	2271	340	49	7.2
325/35R23	115Y	XL	11½J	331	812	1215	2679	340	49	7.2
335/30R23	111Y	XL	12J	343	786	1090	2403	340	49	7.2
285/35R24	108Y	XL	10J	290	810	1000	2205	340	49	7.2
295/30R24	104Y	XL	10½J	301	788	900	1984	340	49	7.2
295/35R24	110Y	XL	10½J	301	816	1060	2337	340	49	7.2
305/35R24	112Y	XL	11J	313	824	1120	2469	340	49	7.2
355/25R24	110Y	XL	13J	366	788	1060	2337	340	49	7.2
335/30R24	112Y	XL	12J	343	812	1120	2469	340	49	7.2

UHP TIRES FORMULA Ω

UTQG	SERIES	TREADWEAR	TRACTION	TEMPERATURE
	ALL	380	A	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload KG	LBS	Max Pressure Kpa	PSI	Tread Depth(mm)
195/55R15	85V	--	6J	201	595	515	1135	300	44	7.7
195/60R15	88V	--	6J	201	615	560	1235	300	44	7.7
195/65R15	91V	--	6J	201	635	615	1356	300	44	7.7
205/55R16	91W	--	6½J	214	632	615	1356	300	44	7.7
205/60R16	92V	--	6J	209	652	630	1389	300	44	7.7
215/60R16	95V	--	6½J	221	664	690	1521	300	44	7.7
205/50ZR17	93W	XL	6.5J	214	638	650	1433	340	50	7.2
215/50ZR17	95W	XL	7J	226	648	690	1521	340	50	7.2
215/55ZR17	98W	XL	7J	226	665	750	1653	340	49	7.7
225/45ZR17	94W	XL	7.5J	225	634	670	1477	340	50	7.2
225/50ZR17	98W	XL	7J	233	658	750	1653	340	50	7.2
225/55ZR17	101W	XL	7J	233	680	825	1819	340	50	7.8
235/45ZR17	97W	XL	8J	236	644	730	1609	340	50	7.8
235/55ZR17	103W	XL	7.5J	245	690	875	1929	340	50	7.7

UHP TIRES FORMULA Z

Sportiness, driving comfort, unbeatable driving enjoyment and outstanding aquaplaning behaviour - that's **FORMULA Z**.

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	600	A	A

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	★380	A	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload KG	LBS	Max Pressure Kpa	PSI	Tread Depth(mm)
195/55R16	87V	--	6J	201	620	545	1201	300	44	8.2
195/60R16	89V	--	6J	201	640	580	1279	300	44	8.0
★225/45ZR18	95W	XL	7.5J	225	659	690	1521	340	50	8.2
★235/45ZR18	98W	XL	7.5J	236	669	690	1521	340	50	8.2
235/50ZR18	101W	XL	7.5J	245	693	825	1819	340	50	8.2
235/55ZR18	104W	XL	8J	265	737	1030	2271	340	50	8.2
235/60R18	107V	XL	7J	240	739	975	2149	340	50	8.2
★245/40ZR18	97W	XL	8.5J	248	653	730	1609	340	50	8.2
245/50ZR18	100W	XL	7.5J	253	703	800	1764	300	44	8.2
255/55ZR18	109W	XL	8J	265	737	1030	2271	340	50	8.2
★245/35ZR20	95W	XL	8½J	248	680	690	1521	340	50	8.2
★275/30ZR20	97Y	XL	9½J	278	674	730	1609	340	50	8.0
★275/40ZR20	106W	XL	9½J	278	728	950	2094	340	50	8.2



UHP TIRES

FORMULA SPEC Z



- Visual position Indicators(VPI)**
Short sipes on both shoulders of the tire visually alert the driver of any misalignment. This allows for correction before the tires are ruined.
- Variable depth arrangement in lateral grooves**
The gradual changes of the lateral groove depth and the bulges in the lateral sidewall grooves can efficiently clean out the small stones and improve the tread contacting area plus the track adhesion.
- The lateral slot-type groove**
Enhances the support between tread blocks, disperses the braking force averagely to all-over the tread ribs and restrains the noises comprehensively.
- 3D Active-Mute Design**
Optimally designed 3D active-mute bumps precisely arranged in the bottom of main grooves, works as the "Frequency Disturber" to reduce the tire rolling noise & ensure a quiet ride.
- The reinforcing ribs between tread blocks**
Greatly optimizes the force transmission and ensures the best stiffness of the tread blocks.



UTQG	TREADWEAR	TRACTION	TEMPERATURE
	★ 200	A	A

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	380	AA	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
★ 205/45ZR17	88W	XL	7J	206	616	560	1235	340	50	--
★ 225/45ZR17	94W	XL	7.5J	225	634	670	1477	340	50	--
245/45ZR17	99Y	XL	8J	243	652	775	1709	340	49	7.7
255/45ZR17	102W	XL	8.5J	255	662	850	1874	340	49	7.7
225/40ZR18	92Y	XL	8J	230	612	630	1389	340	50	7.8
225/45ZR18	95W	XL	7.5J	225	659	690	1521	340	50	7.8
225/50ZR18	110W	XL	8J	230	655	650	1433	340	50	7.8
235/40ZR18	95Y	XL	8.5J	241	647	615	1356	340	50	7.8
★ 245/35ZR18	92Y	XL	8.5J	248	629	630	1389	340	50	--
245/45ZR18	100Y	XL	8J	243	677	800	1764	340	50	7.7
255/35ZR18	94Y	XL	9J	260	635	670	1477	340	50	7.8
255/40ZR18	99Y	XL	9J	260	661	775	1709	340	50	7.8
255/50ZR18	106W	XL	9J	260	685	775	1709	340	50	7.7
265/35ZR18	97Y	XL	9.5J	271	643	730	1609	340	50	7.8
★ 265/40ZR18	101Y	XL	9.5J	271	669	825	1819	340	50	--
265/60R18	110V	--	--	--	--	--	--	--	--	--
275/40ZR18	103W	XL	9.5J	278	700	850	1874	340	50	8.0
225/35ZR19	88Y	XL	8J	230	641	560	1235	340	50	7.7
225/40ZR19	93Y	XL	8J	230	663	650	1433	340	49	7.7
225/45ZR19	96W	XL	7.5J	225	685	710	1565	340	49	7.7
235/35ZR19	91Y	XL	8.5J	241	647	615	1356	340	49	7.8
235/40ZR19	96Y	XL	8.5J	241	671	710	1565	340	50	8.0
235/45ZR19	99W	XL	8J	243	703	850	1874	340	50	7.8
245/35ZR19	93Y	XL	8.5J	248	655	650	1433	340	50	7.8
245/40ZR19	98W	XL	8.5J	248	679	750	1653	340	49	7.7
245/45ZR19	102W	XL	8J	243	703	850	1874	340	50	7.8
255/30ZR19	91Y	XL	9J	260	637	615	1356	340	49	7.7
255/35ZR19	96Y	XL	9J	260	661	710	1565	340	49	7.7
255/40ZR19	100Y	XL	9J	260	687	80	1764	340	50	8.0
265/30ZR19	93Y	XL	9.5J	271	643	650	1433	340	50	7.8
265/35ZR19	98Y	XL	9.5J	271	669	750	1653	340	49	7.7
275/30ZR19	96Y	XL	9.5J	278	649	710	1565	340	50	7.8
275/35ZR19	100Y	XL	9.5J	278	675	800	1764	340	49	8.0
275/40ZR19	105Y	XL	9.5J	278	703	925	2039	340	50	7.8
285/30ZR19	98Y	XL	10J	290	655	750	1653	340	49	8.0
295/30ZR19	100Y	XL	10J	298	660	800	1760	340	50	7.7
★ 235/35R20	92Y	XL	8.5J	241	672	630	1389	340	50	--
245/40ZR20	99Y	XL	8.5J	248	704	775	1709	340	49	7.7
★ 255/30R20	92Y	XL	9J	260	662	630	1389	340	50	--
★ 255/35R20	97Y	XL	9J	260	686	730	1609	340	50	7.8
★ 265/30R20	94Y	XL	9.5J	271	668	670	1477	340	50	7.8
265/35ZR20	99Y	XL	9.5J	271	694	775	1709	340	49	7.7
265/50ZR20	111W	XL	8.5J	277	774	1060	2337	340	50	7.7
275/35ZR20	102Y	XL	--	--	--	--	--	--	--	--
275/45ZR20	110W	XL	9J	273	756	1060	2337	340	50	7.8
285/30ZR20	99Y	XL	10J	290	680	775	1709	340	50	7.8
★ 295/30R20	101Y	XL	10.5J	301	686	825	1819	340	50	7.8
305/30ZR20	103Y		11J	313	692	775	1709	300	44	--
315/35ZR20	110W	XL	11J	320	728	1060	2337	340	50	7.8



UHP TIRES
TEMPESTA GHOST

UTQG	SERIES	TREADWEAR	TRACTION	TEMPERATURE
	★	280	A	A
		320	AA	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
215/40ZR18	89Y	XL	7.5J	218	629	580	1279	340	50	7.2
235/40ZR19	96Y	XL	8.5J	241	671	710	1565	340	50	7.2
255/45ZR19	104Y	XL	8.5J	255	713	900	1984	340	50	7.2
285/40ZR19	107Y	XL	10J	290	711	975	2149	340	50	7.2
235/45ZR20	100Y	XL	8J	236	720	800	1764	340	50	7.2
255/40ZR20	101Y	XL	9J	260	712	825	1819	350	50	7.2
255/45ZR20	105Y	XL	8.5J	255	738	925	2039	340	50	7.2
255/50ZR20	109W	XL	8J	265	764	1030	2271	340	50	7.2
265/40ZR20	104Y	XL	9.5J	271	720	900	1984	340	50	7.2
275/40ZR20	106Y	XL	9.5J	278	728	950	2094	340	50	7.2
285/35ZR20	104Y	XL	10J	290	708	900	1984	340	50	7.2
315/35ZR20	110Y	XL	11J	320	728	1060	2337	340	50	7.2
235/45ZR21	101Y	XL	8J	236	745	825	1819	340	50	7.2
255/35ZR21	98Y	XL	9J	260	711	750	1653	350	50	7.2
255/40ZR21	102Y	XL	9J	260	737	850	1874	340	50	7.2

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
255/45ZR21	106Y	XL	8½J	255	763	950	2094	350	50	7.2
265/40ZR21	105Y	XL	9.5J	271	745	925	2039	340	50	7.2
275/35ZR21	103W	XL	9½J	289	725	875	1929	350	50	7.2
275/35ZR21	103Y	XL	9½J	289	725	875	1929	350	50	7.2
★ 275/50ZR21	113W	XL	8½J	284	809	1150	2535	340	50	6.8
285/30ZR21	100W	XL	10J	290	705	800	1764	350	50	7.2
285/30ZR21	100Y	XL	10J	290	705	800	1764	350	50	7.2
285/45ZR21	113W	XL	--	--	--	--	--	--	--	7.2
285/45ZR21	113Y	XL	9.5J	285	789	1150	2535	340	50	7.2
315/30ZR21	105W	XL	--	--	--	--	--	--	--	7.2
315/30ZR21	105Y	XL	11J	320	723	925	2039	340	50	7.2
★ 315/45ZR21	116W	XL	10½J	315	817	1250	2756	300	44	6.8
255/45ZR22	107Y	XL	8.5J	255	789	975	2149	340	50	7.2

SUV AND 4X4 SERIES

TEMPESTA QUATTRO(4-SEASON)

The ideal choice for Crossovers and SUVs. It is conceived for drivers who look for higher mileage and light off-road performances, without giving up comfort and safety on all road surfaces and in every condition.

UTQG	SERIES	TREADWEAR	TRACTION	TEMPERATURE
	30-55	500	A	A

UTQG	SERIES	TREADWEAR	TRACTION	TEMPERATURE
	60-65	600	A	A

4-SEASON
TEMPESTA QUATTRO

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload KG	Maxload LBS	Max Pressure Kpa	Max Pressure PSI	Tread Depth(mm)
215/65R16	98V	--	6J	221	686	750	1653	300	44	8.7
215/60R17	96V	--	6J	221	690	710	1565	300	44	8.7
215/65R17	99H	--	6J	221	712	775	1709	300	44	9.0
225/60R17	99H	--	6J	228	702	775	1709	300	44	8.7
225/65R17	102H	--	6J	228	724	850	1874	300	44	8.7
235/50ZR17	100W	XL	7J	245	668	800	1764	340	49	8.2
235/60R17	102H	--	7J	240	714	850	1874	300	44	9.0
255/60R17	106H	--	7J	260	738	950	2094	300	44	8.7
215/55ZR18	99W	XL	7J	226	693	775	1709	340	49	7.9
225/50R18	99W	--	7J	233	683	690	1521	300	44	8
225/55ZR18	102W	XL	7J	233	705	850	1874	340	49	7.9
225/60R18	100H	--	6J	228	727	800	1764	300	44	8.7
235/50ZR18	101W	XL	--	--	--	--	--	--	--	--
235/55R18	104W	XL	7.5J	245	715	900	1984	340	50	8
235/60R18	103V	--	7J	240	739	875	1929	300	44	8.7
235/65R18	106H	--	7J	240	763	950	2094	300	44	9.0
245/60R18	105H	--	7J	248	751	925	2039	300	44	8.7
255/60R18	112H	XL	7J	260	763	1120	2469	340	49	9.0
225/55ZR19	99W	--	7J	233	731	775	1709	300	44	7.9
235/50ZR19	103W	XL	7J	245	719	875	1929	340	49	7.9
235/55ZR19	105W	XL	7J	245	741	925	2039	340	49	7.9
245/55ZR19	103W	XL	7J	253	753	875	1929	300	44	7.9
255/45ZR19	104W	XL	8J	255	713	900	1984	340	49	7.9
255/50R19	107V	XL	8J	265	739	975	2149	340	49	7.9
255/55R19	111V	XL	8J	265	763	1090	2403	340	49	7.9



Optimized profile and innovative materials

Reduced fuel consumption and CO2 emissions. Reduced noise to provide comfortable and quiet ride.

Four wide circumferential grooves

Deliver excellent performance on wet roads.

Longitudinal siping and high lateral siping density

Greater lateral stability and better winter and wet traction.

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload KG	Maxload LBS	Max Pressure Kpa	Max Pressure PSI	Tread Depth(mm)
265/50R19	110V	XL	8J	277	749	1060	2337	340	49	7.9
235/50R20	104W	--	7.5J	245	755	800	1764	300	44	8
235/55R20	105W	--	7.5J	245	766	850	1874	300	44	8
245/45ZR20	103W	XL	8J	243	728	875	1929	340	49	7.9
245/50R20	105V	XL	7J	253	754	925	2039	340	49	8.2
255/45ZR20	105W	XL	8J	255	738	925	2039	340	49	7.9
255/50R20	109V	XL	8J	265	764	1030	2271	340	49	7.9
255/55R20	110V	XL	8J	265	788	1060	2337	340	49	8.2
265/45ZR20	108W	XL	9J	266	746	1000	2205	340	49	7.9
275/50R20	113V	XL	8J	284	784	1150	2535	340	49	7.9
275/55R20	117H	XL	8J	284	810	1285	2833	340	49	8.2
265/45ZR21	108W	XL	9J	266	771	1000	2205	340	49	7.9
275/40R21	107W	XL	9.5J	278	753	975	2149	340	50	8
275/45ZR21	110W	XL	9J	273	781	1060	2337	340	49	7.9
285/40ZR21	109W	--	10J	290	761	925	2039	300	44	8.0
295/35ZR21	107W	--	10.5J	301	739	875	1929	300	44	8.0
295/40R21	111W	XL	10.5J	301	769	1090	2403	340	50	8
315/35ZR21	111W	XL	11J	320	753	1090	2403	340	50	8.0
315/40R21	115W	--	--	--	--	--	--	--	--	--
265/40ZR22	106W	XL	9J	271	771	950	2094	340	49	7.9
275/35ZR22	104W	XL	9.5J	278	751	900	1984	340	50	8.0
275/40ZR22	107W	XL	9J	278	779	975	2149	340	49	7.9
285/40ZR22	110Y	XL	10J	290	787	1060	2337	340	49	7.9
285/45ZR22	114W	--	9.5J	285	815	1060	2337	300	44	8.0
295/40ZR22	112Y	XL	10J	301	795	1120	2469	340	49	7.9
315/30ZR22	107W	XL	11J	320	749	975	2149	340	50	8
315/35ZR22	111W	--	11J	320	779	1090	2403	340	49	8.0
325/35ZR22	114Y	--	11.5J	331	787	1180	2601	300	44	8.0
325/35ZR22	111W	--	--	--	--	--	--	--	--	--
325/40ZR22	114W	--	11.5J	331	819	1180	2601	300	44	8.0
275/35ZR23	104Y	--	9J	278	776	900	1984	340	49	7.9
285/40ZR23	111Y	--	10J	290	812	1090	2403	340	49	7.7
305/35ZR23	111W	--	11J	313	789	975	2149	300	44	8.0
315/30R23	108Y	--	11J	320	766	1000	2205	340	49	7.9
325/35ZR23	115Y	--	11J	331	812	1215	2679	340	49	7.7

Size	P.R.	L.I./S.R.	Tread Depth(mm)
175/70R14LT	6PR	95/93S	9
175/70R14LT	6PR	95/93S	9
205/70R14LT	6PR	102/100S	9
235/60R14	--	96H/T	10
205/60R15	--	91T	9
205/65R15	--	94T	9
205/70R15	--	96T	9
225/50R15	--	91H/T	10
235/60R15	--	98H/T	10
235/75R15	--	105T	10
LT235/75R15	8PR	110/107S	10
235/60R15C	8PR	105/103S	10
265/50R15C	6PR	101/99S	10
31x10.5R15LT	6PR	109S	10
205/60R16	--	92T	9
235/70R16	--	106T	10
LT235/70R16	8PR	110/107S	10
245/70R16	--	107T	10
LT245/70R16	8PR	113/110S	10
245/75R16	--	111T	10
LT245/75R16	8PR	114/111S	10
255/70R16	--	111T	10
LT255/70R16	8PR	115/112S	10
265/70R16	--	112T	10
LT265/70R16	8PR	117/114S	10
275/70R16	--	114T	10
LT275/70R16	8PR	119/116S	10
225/65R17	--	102T	10

Size	P.R.	L.I./S.R.	Tread Depth(mm)
LT225/65R17	--	107/103S	10
235/65R17	--	104T	10
LT235/65R17	--	109/105S	10
265/65R17	--	112T	10
LT265/65R17	8PR	116/113S	10
265/70R17	--	115T	10
LT265/70R17	8PR	118/115S	10
275/70R17	--	115T	10
LT275/70R17	8PR	120/117S	10
285/70R17	--	116T	10
LT285/70R17	10PR	122/119S	10
265/60R18	--	114H/T	10
265/60R18	--	114H	10
LT265/60R18	8PR	114/110S	10
265/65R18	--	114H/T	10
LT265/65R18	8PR	117/114S	10
285/60R18	--	120H	10
285/60R18	--	120H/T	10
LT285/60R18	8PR	121/118S	10
285/65R18	--	116H/T	10
285/65R18	--	116H	10
LT285/65R18	8PR	121/118S	10
265/50ZR20	--	111H	10
LT265/50R20	10PR	115/112S	10
285/50R20	--	116H	10
LT285/50R20	10PR	119/116S	10
285/55R20	--	119H	10
LT285/55R20	8PR	117/114T	10



ALL-TERRAIN A/T



Size	P.R.	L.I./S.R.	Standard Rim	Section Width (mm)	Overall Diameter(mm)	Maxload				Max Pressure		Tread Depth(mm)
						SINGLE		DUAL		Kpa	PSI	
	KG	LBS	KG	LBS								
LT215/75R14	8PR	104/101Q	6J	216	678	900	1985	825	1820	450	65	13.5
LT275/60R15	10PR	117/114Q	8J	279	711	1285	2835	1180	2600	550	80	13.5
LT325/60R15	6PR	106Q	9.5J	311	711	1150	2095	--	--	250	35	13.5
LT235/75R15	10PR	116/113Q	6.5J	235	733	1250	2755	1150	2535	550	80	13.5
LT235/70R16	8PR	110/107Q	7J	240	736	1060	2335	975	2150	450	65	13.5
LT245/70R16	10PR	118/115Q	7J	248	750	1320	2910	1215	2680	550	80	13.5
LT245/75R16	10PR	120/116Q	7J	248	774	1380	3042	1260	2778	550	80	13.5
LT255/70R16	10PR	120/117Q	7.5J	260	764	1400	3085	1285	2835	550	80	13.5
LT265/70R16	10PR	121/118Q	8J	272	778	1450	3195	1320	2910	550	80	13.5
LT275/70R16	8PR	119/116Q	8J	279	792	1360	3000	1250	2755	450	65	13.5
LT285/70R16	10PR	125/122Q	8.5J	292	806	1650	3640	1500	3305	550	80	13.5
LT305/70R16	10PR	124/121Q	9J	311	834	1600	3525	1450	3195	450	65	13.5
LT265/75R16	10PR	123/120Q	7.5J	267	804	1550	3415	1400	3085	550	80	13.5
LT245/70R17	10PR	119/116Q	7J	248	776	1360	3000	1250	2755	550	80	13.5
LT265/65R17	10PR	120/117Q	8J	272	776	1400	3085	--	--	550	80	13.5
LT265/70R17	10PR	123/120Q	8J	272	804	1550	3415	--	--	550	80	13.5
LT285/70R17	10PR	126/123Q	8½J	292	832	1700	3750	--	--	550	80	13.5
LT265/60R18	10PR	119/116Q	8J	272	775	1360	3000	--	--	550	80	13.5
LT275/65R18	10PR	123/120Q	8J	279	815	1550	3415	--	--	550	80	13.5
LT285/60R18	10PR	122/119Q	8½J	292	799	1500	3305	--	--	550	80	13.5
LT265/50R20	10PR	115/112S	8½J	277	774	1215	2680	--	--	550	80	13.5
LT275/55R20	10PR	120/117Q	8½J	284	810	1400	3085	--	--	550	80	13.5
LT305/55R20	10PR	121/118Q	9.5J	316	844	1350	3195	1320	2910	450	65	13.5
LT275/45R22	10PR	115/112Q	9J	273	807	1215	2680	1120	2470	550	80	13.5
31x10.50R15LT	6PR	109Q	8.5J	268	775	1030	2270	--	--	350	50	13.5
32x11.50R15LT	6PR	113Q	9J	290	801	1150	2535	--	--	350	50	13.5
33x12.50R15LT	6PR	108Q	10J	318	826	1000	2205	--	--	250	35	13.5
33x12.50R17LT	10PR	120Q	10J	318	826	1400	3085	--	--	450	65	13.5
33*12.50R20LT	10PR	114Q	10J	318	826	1180	2600	--	--	450	65	13.5
35x12.50R17LT	10PR	125Q	10J	318	877	1650	3640	--	--	450	65	13.5
35x12.50R18LT	10PR	123Q	10J	318	877	1550	3415	--	--	450	65	13.5
35x12.50R20LT	10PR	121Q	10J	318	877	1450	3195	--	--	450	65	13.5
37x12.50R20LT	10PR	126Q	10J	318	928	1700	3750	--	--	450	65	13.5



SUV AND 4X4 SERIES

MORE MILES PER SUV. QUIET COMFORT, SAFETY AND BETTER MILEAGE.

EXPLORER H/T840

The EXPLORER H/T840 is the perfect tire for every highway and byway. VITOUR's special compound greatly extends tread life while enhancing all-weather traction. And our adaptive shoulder blocks help reduce tread noise.

Size	L.I./S.R.	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth (mm)
					SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
205R16C	110/108S	6J	208	736	1060	1000	2335	2205	450	65	10.2
255/70R15C	112/110S	7½J	260	739	1120	1060	2469	2337	375	54	8.2



SAFARI A/T

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	460	A	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
235/70R16	106H	--	--	240	736	950	2094	300	44	8.2
245/70R16	111H	--	7J	248	750	1090	2403	340	50	7.8
265/70R16	112T	--	8J	272	778	1120	2469	300	44	7.8
275/70R16	114H	--	8J	279	792	1180	2601	300	44	7.8
245/65R17	107T	--	7J	248	750	975	2149	300	44	7.8
265/65R17	112T	--	8J	272	776	1120	2469	300	44	7.8
265/70R17	115T	--	--	--	--	--	--	--	--	7.8
275/65R17	115T	--	8J	279	790	1215	2679	300	44	7.8
285/65R17	116H	--	8½J	292	802	1250	2756	300	44	7.8
265/60R18	110H	--	8J	272	775	1060	2337	300	44	7.7
265/65R18	114H	--	8J	272	802	--	--	300	44	7.8
285/60R18	116H	--	8½J	292	799	1250	2736	300	44	7.8

SAFARI ATX

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	460	A	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
265/65R17	112T	--	8J	272	776	1120	2469	300	44	7.8

SAFARI ATX+

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	460	A	A

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
275/60R20	119H	--	8J	276	838	1360	2298	340	49	8.2
285/50R20	112V	--	9J	297	794	1120	2469	300	44	8.2

LIGHT TRUCK RADIAL SERIES

VITOUR's extreme durability and long tread life provide light truck owners with dependable year round service.



V5000

Size	L.I./S.R.	P.R.	Standard Rim	Section Width(mm)	Overall Diameter (mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth(mm)
						SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
195R15C	106/104Q	8	5½J	198	690	950	900	2094	1984	450	65	10.2
205/70R15C	106/104R	8	6J	209	669	950	900	2094	1984	450	65	10.2

V8000

UTQG	TREADWEAR	TRACTION	TEMPERATURE
	600	A	A

Size	L.I./S.R.	P.R.	Standard Rim	Section Width(mm)	Overall Diameter (mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth(mm)
						SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
215/70R16	100H	--	6½J	221	708	800	--	1764	--	300	44	9.7



V888

Size	L.I./S.R.	P.R.	Standard Rim	Section Width(mm)	Overall Diameter (mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth(mm)
						SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
5.00R12LT	88/86P	10	3.50B	134	568	560	530	1235	1170	550	80	9.7
5.50R13LT	94/93P	10	4.00B	160	620	670	650	1480	1433	550	80	9.7
145R13C	91/89R	10	4.00B	147	566	615	580	1355	1278	550	80	9.7



RWL SERIES



GALAXY F1

Size	L.I./S.R.	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
					KG	LBS	Kpa	PSI	
185/60R13	80V	5 1/2J	189	552	450	992	300	44	8.0



FORMULA X



Size	L.I./S.R.	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
					KG	LBS	Kpa	PSI	
155/65R13	73T	4.50B	157	532	365	805	300	44	8.0
155/65R14	75S	4 1/2J	170	570	387	853	300	44	8.0
175/65R14	82H	5J	177	584	475	1047	300	44	8.00
175/70R14	84H	5J	177	602	500	1102	300	44	8.20
185/60R14	82H	5 1/2J	189	578	475	1047	300	44	8.00
195/60R14	86H	6J	201	590	530	1168	300	44	8.00
165/55R15	75V	5J	170	563	387	853	300	44	8.0
175/65R15	84H	5J	177	609	500	1102	300	44	8.0
185/65R15	88V	5 1/2J	189	621	560	1235	300	44	8.00
195/65R15	91V	6J	201	635	615	1356	300	44	8.00
205/65R15	94H	6J	209	647	670	1477	300	44	8.20
205/55R16	91V	6 1/2J	214	632	600	1323	300	44	8.20
205/60R16	92V	6J	209	652	630	1389	300	44	8.20
215/60R16	95V	6 1/2J	221	664	690	1521	300	44	8.20
215/65R16	98H	6 1/2J	221	686	750	1653	300	44	8.20
215/55ZR17	98W	7J	226	668	750	1653	340	50	8.20
215/60R17	96V	6 1/2J	221	690	710	1565	300	44	8.20
225/65R17	102V	6 1/2J	228	724	850	1874	300	44	8.20

FORMULA Z



Size	L.I./S.R.	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
					KG	LBS	Kpa	PSI	
195/60R16	89V	6J	201	640	580	1279	300	44	8.0

WSW SERIES



R360 STEEL

VITOUR White Sidewall Tires

Series	Size	L.I./S.R.	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
70	225/70R15	100H	6½J	228	697	800	1764	300	44	8.0
75	205/75R15	97H	5½J	203	689	730	1609	300	44	8.0



GALAXY R1

VITOUR White Sidewall Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
155R15	82H	--	4½J	157	578	475	1047	300	44	7.3
165R15	86H	--	4½J	165	594	530	1168	300	44	7.8



Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
185R15	96H	--	--	--	--	--	--	--	--	--
175/70R13	82T	--	5.00B	177	576	475	1047	300	44	7.8
185/70R13	86T	--	5.50B	189	590	530	1168	300	44	7.8
195/70R14	91H	--	6J	201	630	615	1356	300	44	7.8
195/65R15	91V	--	6J	201	635	615	1356	300	44	7.8
165/65R13	77T	--	5.00B	170	544	412	908	300	44	7.6
175/70R13	82T	--	5.00B	177	576	475	1047	300	44	7.8
185/70R13	86T	--	5.50B	189	590	530	1168	300	44	7.8
185/65R14	86H	--	5½J	189	596	530	1168	300	44	7.8
185/70R14	88H	--	5½J	189	616	560	1235	300	44	7.8
185/80R14	95T	--	5½J	184	650	650	1433	300	44	7.8
195/70R14	91H	--	6J	201	630	615	1356	300	44	7.8
205/70R14	95H	--	6J	209	644	690	1521	300	44	7.8
205/75R14	95H	--	5½J	203	664	690	1521	300	44	7.8
185/65R15	88H	--	5½J	189	621	560	1235	300	44	7.8
195/60R15	88H	--	6J	201	615	560	1235	300	44	7.8
195/65R15	91H	--	6J	201	635	615	1356	300	44	7.8
205/65R15	94H	--	6J	209	647	670	1477	300	44	7.8
205/70R15	96H	--	6J	209	669	710	1565	300	44	7.8
205/75R15	97H	--	5½J	203	689	730	1609	300	44	7.8
215/75R15	100H	--	6J	216	703	800	1764	300	44	7.8
225/70R15	100H	--	6½J	228	697	800	1764	300	44	7.8
225/75R15	102H	--	6J	223	719	850	1874	300	44	7.8
P235/70R15	103H	--	7J	240	711	875	1929	300	44	7.8
235/75R15	105T	--	6½J	235	733	925	2039	300	44	7.8
215/60R16	95H	--	6½J	221	664	690	1521	300	44	7.8
205/70R14	95H	--	6J	209	644	690	1521	300	44	7.8
215/70R14	96H	--	6½J	221	658	710	1565	300	44	7.8
225/70R14	98H	--	6½J	228	672	760	1675	300	44	7.8
235/60R14	96H	--	7J	240	638	710	1565	300	44	7.8
245/60R14	98H	--	7J	248	650	760	1675	300	44	7.8
225/70R15	100H	--	6½J	228	697	800	1764	300	44	7.8
215/60R15	94V	--	6½J	221	639	670	1477	300	44	7.8
215/70R15	97H	--	6½J	221	683	735	1620	300	44	7.8
235/60R15	98V	--	7J	240	663	750	1653	300	44	7.8
P235/70R15	103H	--	7J	250	725	875	1929	300	44	7.8
245/60R15	101V	--	7J	248	675	825	1819	300	44	7.8
255/60R15	102V	--	7½J	260	687	850	1874	300	44	7.8
255/70R15	108H	--	7½J	260	739	1000	2205	300	44	7.8
265/50R15	99H	--	8½J	277	647	780	1720	300	44	7.8
275/60R15	107V	--	8J	279	711	975	2149	300	44	7.8
285/70R15	115H	--	8½J	292	781	1215	2679	300	44	7.8
295/50R15	105H	--	9½J	309	677	935	2061	300	44	7.8

RWL SERIES



FORMULA

VITOUR Raised White Letter Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
175/50R13	72H	--	5.50B	182	506	355	783	300	44	7.1
195/55R13	80H	--	6.00B	201	544	450	992	300	44	6.8
215/50R13	84H	--	7.00B	226	546	495	1091	300	44	6.8
235/50R13	89H	--	7.50B	245	566	580	1279	300	44	7.1
185/45R15	75H	--	6.00J	183	547	387	853	300	44	7.1
195/45R15	78H	--	6.50J	195	557	425	937	300	44	7.1
195/50R15	82V	--	6J	201	577	475	1047	300	44	8.0
215/45R17	91W	XL	7J	213	626	615	1356	340	50	8.0



TURBO R-279

VITOUR Raised White Letter Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
155/70R12	73T	--	4.50B	157	523	365		300	44	6.1
165/70R12	77T	--	5.00B	170	537	412		300	44	6.1



GERMAN-007

VITOUR Raised White Letter Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
145/70R12	69T	--	4.50B	150	50	325	716	300	44	9.0
155/70R13	73T	--	4½J	157	523	365	805	300	44	7.6
165/70R14	77T	--	5.00B	170	537	412	908	300	44	9.0



WSW / RWL SERIES



RADIAL G/T

VITOUR Raised White Letter Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload KG	LBS	Max Pressure Kpa	PSI	Tread Depth(mm)
205/70R14	95H	--	6J	209	644	690	1521	300	44	7.8
215/70R14	96H	--	6½J	221	658	710	1565	300	44	7.8
225/70R14	98H	--	6½J	228	672	760	1675	300	44	7.8
235/60R14	96H	--	7J	240	638	710	1565	300	44	7.8
245/60R14	98H	--	7J	248	650	360	1675	300	44	7.8
215/60R15	94V	--	6½J	221	639	670	1477	300	44	7.8
215/70R15	97H	--	6½J	221	683	735	1620	300	44	7.8
225/70R15	100H	--	6½J	228	697	800	1764	300	44	7.8
235/60R15	98V	--	7J	240	663	750	1653	300	44	7.8
235/70R15	103H	--	7J	250	725	875	1929	300	44	7.8
245/60R15	101V	--	7J	248	675	825	1819	300	44	7.8
255/60R15	102V	--	7½J	260	687	850	1874	300	44	7.8
255/70R15	108H	--	7½J	260	739	1000	2205	300	44	7.8
265/50R15	99H	--	8½J	277	647	780	1720	300	44	7.8
275/60R15	107V	--	8J	279	711	975	2149	300	44	7.8
285/70R15	115H	--	8½J	292	781	1215	2679	300	44	7.8
295/50R15	105H	--	9½J	309	677	935	2061	300	44	7.8



GALAXY F1

VITOUR White Sidewall Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload KG	LBS	Max Pressure Kpa	PSI	Tread Depth(mm)
175/70R12	80H	--	5.00B	177	551	450	992	300	44	8.0
155/80R13	79T	--	4.50B	157	578	437	963	300	44	8.0
165/65R13	77T	--	5.00B	170	544	412	908	300	44	8.0
175/70R13	82H	--	5.00B	177	576	475	1047	300	44	8.0
185/60R13	80V	--	5½J	189	552	450	992	300	44	8.0



GALAXY F1

VITOUR Raised White Letter Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload KG	LBS	Max Pressure Kpa	PSI	Tread Depth(mm)
165/65R13	77T	--	5.00B	170	544	412	908	300	44	8.0



WSW / RWL SERIES



FORMULA X

VITOUR White Sidewall Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
165/70R13	79T	--	5.00B	170	562	437	963	300	44	8.0
155/65R14	75S	--	4 1/2 J	170	570	387	853	300	44	8.0
175/65R14	82H	--	5J	177	584	475	1047	300	44	8.0
195/60R14	86H	--	6J	201	590	530	1168	300	44	8.0
165/55R15	75V	--	5J	170	563	387	853	300	44	8.0
195/55R15	85H	--	6J	201	595	515	1135	300	44	8.0
195/60R15	88H	--	6J	201	615	560	1235	300	44	8.0



FORMULA X

VITOUR Raised White Letter Tires

Size	L.I./S.R.	Load Range	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
						KG	LBS	Kpa	PSI	
195/50R15	82V	--	6J	201	577	475	1047	300	44	8.0
195/65R15	91V	--	6J	201	635	615	1356	300	44	8.0



V2000

VITOUR White Sidewall Tires

Size	L.I./S.R.	P.R.	Standard Rim	Section Width(mm)	Overall Diameter (mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth(mm)
						SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
185R14C	102/100Q	8	5 1/2 J	188	650	850	800	1874	1764	450	65	8.7
195R14C	106/104Q	8	5 1/2 J	196	668	950	900	2095	1985	450	65	8.7
195R15C	106/104Q	8	5 1/2 J	196	693	950	900	2095	1985	450	65	8.7
195/70R15C	104/102R	8	6J	201	655	900	850	1984	1874	450	65	10.2
205/70R15C	106/104R	8	6J	209	669	950	900	2094	1984	450	65	10.2
225/70R15C	112/110R	8	6 1/2 J	228	697	1120	1050	2496	2337	450	65	10.2



V9000

VITOUR White Sidewall Tires

Size	L.I./S.R.	P.R.	Standard Rim	Section Width(mm)	Overall Diameter (mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth(mm)
						SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
5.00R12LT	88/86P	10	3.50B	134	568	560	530	1235	1170	550	80	8.7



BIRDSTONE

VITOUR White Sidewall Tires

Size	L.I./S.R.	P.R.	Standard Rim	Section Width(mm)	Overall Diameter (mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth(mm)
						SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
195R14C	106/104Q	8	5½J	196	668	950	900	2095	1985	450	65	9.0
215/70R15C	109/107Q	8	6½J	221	683	1030	975	2270	2150	450	65	9.0



CARGO VAN

VITOUR White Sidewall Tires

Size	L.I./S.R.	P.R.	Standard Rim	Section Width(mm)	Overall Diameter (mm)	Maxload(KG)		Maxload(KG)		Max Pressure(LBS)		Tread Depth(mm)
						SINGLE	DUAL	SINGLE	DUAL	Kpa	PSI	
205/75R16C	113/111R	10	5½J	203	714	1150	1090	2535	2405	525	76	10.2
215/75R16C	116/114R	10	6J	216	728	1250	--	2755	--	525	76	10.7
235/65R16C	121/119R	10	7J	240	712	1450	1360	3195	3000	575	84	902



SAFARI CLUB

Size	L.I./S.R.	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
					KG	LBS	Kpa	PSI	
225/95R16C	118/116R	6J	223	834	1320	2910	475	69	8.5
245/85R16	114S	7J	240	835	1180	2601	300	44	8.5



SUPER SAFARI

Size	L.I./S.R.	Standard Rim	Section Width(mm)	Overall Diameter(mm)	Maxload		Max Pressure		Tread Depth(mm)
					KG	LBS	Kpa	PSI	
9.00R16LT	115/110Q	--	--	--	--	--	--	--	--
9.00R17LT	115/112Q	--	--	--	--	--	--	--	--

WINTER STUDLESS



ICE LINE

Size	L.I./S.R.	Load Range
175/70R14	84T	--
185/60R14	86T	XL
185/60R15	84H	--
185/65R15	88H	--
195/55R15	89T	--
195/60R15	88H	--
195/65R15	91H	--
205/65R15	94H	--
205/55R16	91H	--
205/60R16	96H	--
215/55R16	97H	--
215/60R16	99H	--
215/65R16	98T	--
225/55R16	95H	--
215/45R17	91H	--
215/50R17	91V	--
215/55R17	98V	--
215/60R17	100H	--
225/50R17	98V	XL
225/55R17	101V	--
225/60R17	99H	--
225/65R17	102H	--
235/45R17	97V	--

Size	L.I./S.R.	Load Range
235/55R17	103V	--
235/65R17	108H	XL
245/45R17	99H	XL
265/65R17	112H	--
215/55R18	99V	--
225/45R18	95T	--
225/50R18	99V	--
225/55R18	98V	--
225/60R18	100H	--
235/45R18	98V	--
235/50R18	101V	--
235/55R18	104V	--
235/60R18	107H	--
245/45R18	100V	XL
245/50R18	104H	XL
255/55R18	109V	XL
235/55R19	105V	--
245/45R19	102H	XL
245/55R19	103V	--
255/50R19	107H	XL
255/55R19	111V	--
255/50R20	109V	--

WINTER STUDLESS



ICE PROTECTION

Size	L.I./S.R.	Load Range
265/55R19	113H	XL
245/45R20	103H	XL
255/35R21	98H	XL
255/40R21	102H	XL
255/45R21	106H	XL
255/50R21	109H	XL
265/45R21	108H	XL
275/35R21	103H	XL
285/30R21	100H	XL
285/35R21	105H	XL
285/45R21	113H	XL
315/30R21	105H	XL
325/30R21	105H	XL
255/45R22	107H	XL
265/40R22	106H	XL
275/35R22	104H	XL


Size	L.I./S.R.	Load Range
275/40R22	107H	XL
275/50R22	115H	XL
285/35R22	106H	XL
285/40R22	110H	XL
285/45R22	114H	XL
295/40R22	112H	XL
315/30R22	107H	XL
315/35R22	111H	XL
325/35R22	114H	XL
325/40R22	118H	XL
275/35R23	104H	XL
285/35R23	107H	XL
285/40R23	111H	XL
315/30R23	108H	XL
325/30R23	109H	XL
325/35R23	115H	XL

WINTER STUDLESS



ICE PROTECTION S

Size	L.I./S.R.	Load Range
265/55R19	113T	XL
245/45R20	103T	XL
245/50R20	105T	XL
255/50R20	109T	XL
255/55R20	110T	XL
255/35R21	98T	XL
255/40R21	102T	XL
265/45R21	104T	--
285/30R21	100T	XL
285/35R21	105T	XL
325/30R21	108T	XL
265/40R22	106T	XL
275/35R22	104T	XL
275/50R22	115T	XL
285/40R22	110T	XL
285/45R22	114T	XL
315/30R22	107T	XL
325/35R22	114T	XL
325/40R22	114T	--
285/40R23	111T	XL

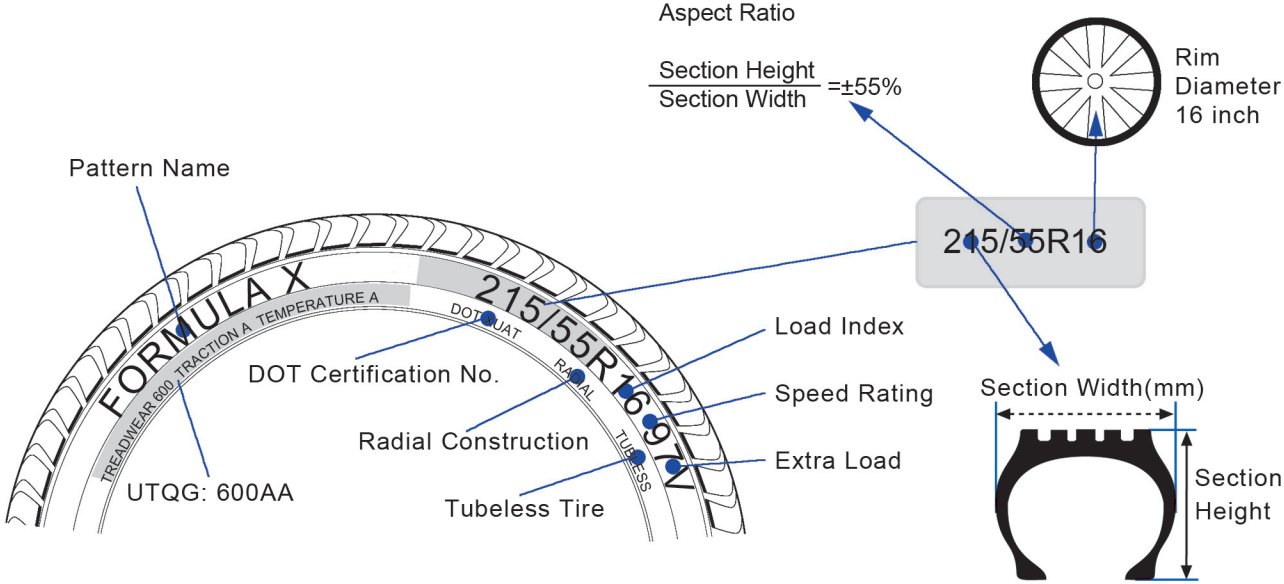

Speed Symbols

SI	KM/H
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300
Z	Above 240

Load Capacity Index

LI	KG	LI	KG	LI	KG	LI	KG
50	190	70	335	90	600	110	1060
51	195	71	345	91	615	111	1090
52	200	72	355	92	630	112	1120
53	206	73	365	93	650	113	1150
54	212	74	375	94	670	114	1180
55	218	75	387	95	690	115	1215
56	224	76	400	96	710	116	1250
57	230	77	412	97	730	117	1285
58	236	78	425	98	750	118	1320
59	243	79	437	99	775	119	1360
60	250	80	450	100	800	120	1400
61	257	81	462	101	825	121	1450
62	265	82	475	102	850	122	1500
63	272	83	487	103	875	123	1550
64	280	84	500	104	900	124	1600
65	290	85	515	105	925	125	1650
66	300	86	530	106	950	126	1700
67	307	87	545	107	975	127	1750
68	315	88	560	108	1000	128	1800
69	325	89	580	109	1030	129	1850
						130	1900