

Homepage.....

Input volume.....

Output volume.....

Preset.....

Language.....

Device information...



...Scenes

...Total volume

# Touch Screen Wired Wall Controller

QB01A

## Specification

## Chapter 1: Introduction

QB01A is a fast and convenient function accessory in the MAP series. It is a 4" IPS capacitive touch screen, with functions such as quick recall of presets, total volume, channel gain adjustment, etc., can be installed in 86 boxes, suitable for Various environments.

## Chapter 2: Parameters

|                        |                             |
|------------------------|-----------------------------|
| Model                  | QB01A                       |
| Size                   | 4 inches                    |
| Resolution             | 480*480                     |
| Color                  | 65K color, 16-bit RGB       |
| Voltage                | 9-18V                       |
| Interface              | RS485                       |
| Effective display size | 71.9mm×70.2mm               |
| Net weight             | 0.115kg                     |
| Gross weight           | 0.295kg                     |
| Production size        | 90.7mm×90.7mm×27.9mm        |
| Packaged size          | 210mm×123mm×65mm            |
| Working temperature    | -20°C ~ 70°C                |
| Application            | MAP series matrix processor |

## Chapter 3: Wiring schematic diagram

- Gains in each input channel.....
- Gains in each output channel.....
- Presets switch.....
- Language switch.....
- Device information.....




壁挂屏后面板接口


Wiring diagram:

Back panel interface


Adapter

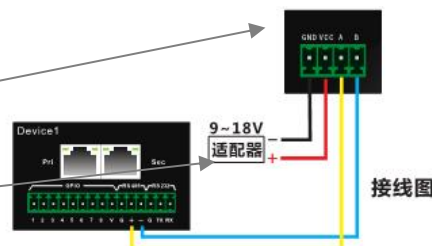

MEDIA MARTIX AUDIO PROCESSOR ACCESSORY

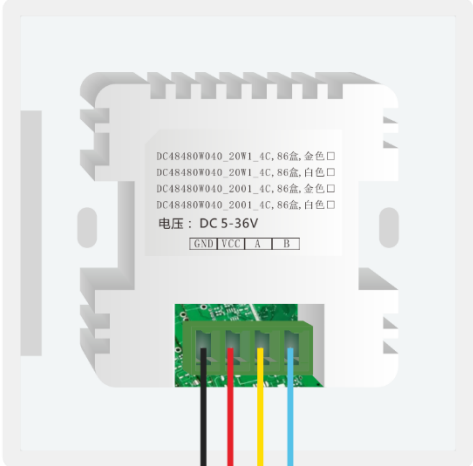

Adapter - + GND VCC A B

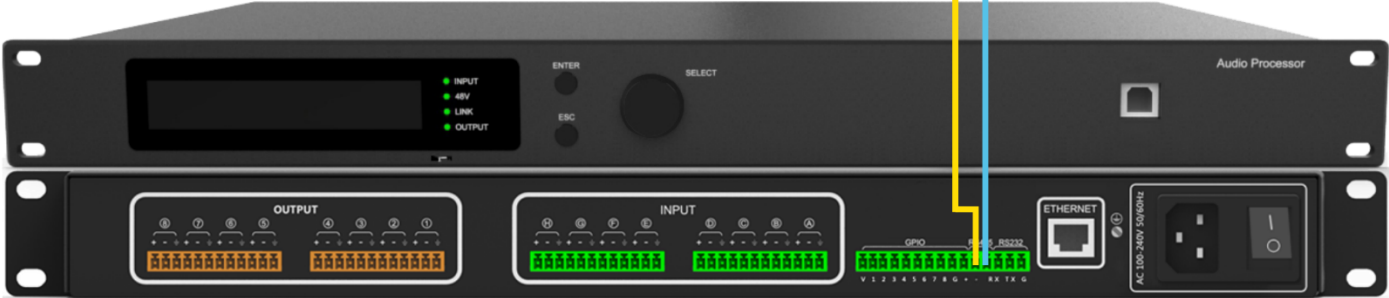

+ -