







CARGO TYPE: BOX	WHEELBASE: LONG	BATTERY PACK: 11.52 kWh	DRIVER SEAT: MIDDLE
General Information		Driving Range <sup>1</sup>	
Classification	NA	Driving Range	130 km
Body Structure	Load-bearing	Real-world Driving Range	104+ km
Dimensions (L × W × H)	3100 x 1250 x 1890 mm	Energy Consumption	≈ 111 Wh/km
Width (Front/Rear)	1550 (Mirror opened) / 1235 mm	Energy Efficiency	≈ 9 km/Wh
Wheelbase	2125 mm	,	
Seats / Doors	1/2	Tires & Suspensions	
Ramp Angles (Front/Rear)	90° / 22°	Brake (Front / Rear)	Disc / Drum
Track Width (Front/Rear)	966 / 1043 mm	Wheels	Steel
Overhang (Front/Rear)	257 / 682 mm	Tire Size	145/70R12 (LT)
Gradeability	20% (11.54°)	Front Suspension	McPherson
Min. Turning Radius	5000 mm	Rear Suspension	Leaf Spring
Min. Ground Clearance	140 mm		
GVW (Gross)	1,200 kg	Lights	
Curb Weight (Net)	692 kg	Front Combination Light	Halogen
	· · · · ·	Daytime Running Light	Halogen
Electric Motor		Turn Signal Lights	Halogen
Motor Type / Drive Mode	PMSM / RWD	Combination Tail light	LED
Transmission	Fixed ratio	Rear fog & Reversing light	LED
Top Speed	70 km/h	Interior Cabin Light	LED
Peak Power (Rated)	15 kW (7.5 kW)	interior out in Light	225
Peak Torque (Rated)	85 N.m (42.5 N.m)	Standard Accessories	
reak forque (Nateu)	03 (42.3 (4.11)	CBS Combined Braking System	Power Windows
Battery Pack <sup>3</sup>		Intermittent Windshield Wiper	Analogue Instrument Cluster
Battery Type	LiFePO4 (Air-cooled)	Imitation Leather Seat Covers	Heating
Battery Pack Capacity	11.52 kWh	2-way Manual Seats	Rearview Mirrors (manual)
Battery Pack Nominal Voltage	76.8V	1 × USB Port	9" LCD Infotainment Display
Battery Pack Rated Capacity	150Ah	Reversing Warning Alarm	Bluetooth connectivity
battery Fack Nated Capacity	IJUAII	2 × Cup Holders	OBD Connection
Cargo Platform <sup>2</sup>		Central Door Lock	Rear-view Camera
Box Volume	1.95 m³	Key FOB / Keyless Entry	Key-in Ignition
Cargo Outside (L × W × H)	1510 × 1194 × 1277 mm	3-point Safety Belt (retractable)	EU Type2 Charging Plug
Cargo Inside (L × W × H)	1397 × 1158 × 1207 mm	4 × Loudspeaker	Portable Charger (220V)
Cargo Payload	358 kg	Adjustable Air Vents	Warning Triangle & Safety Vest
Load Height	705 mm	Drive Mode Dialer (R N D)	warning mangle & Salety vest
Load Height	703 mm	Drive Mode Diater (K N D)	
Charging <sup>4</sup>		Powertrain Upgrade	
Charging Mode	AC slow charging	Battery Pack Upgrade to 23 kWh (76.8V / 300Ah)	
On-board Charger (OBC)	3.3 kW	• Peak Motor Power 15 kW	- Curb Weight 720 kg
Charging Time (20-80%)	≈ 2.6 h	• Peak Torque Power 85 Nm	- Payload 330 kg
Charging Time (0-100%)	≈ 4.4 h	· Horse Power 20 hp	Driving Range 260 km (WMTC)
Charging Distance in 1 hour (est.)	≈ 30 km		-
		Options	
Warranty		6.6 kW On-board Charger (OBC)	Air Condition
Battery Pack Warranty	4 years or 200k km (whichever comes first)	Alloy Wheel	Driver: LHD
Vehicle Warranty	3 years or 40k km (whichever comes first)	Rooftop Solar Panel	Roof Rack Platform

## CONTACT US

Shelton +86 188 6292 8261 | sheltonwu@jonwayev.com Sophie +86 183 6122 7440 | sophieyu@jonwayev.com www.jonwayev.com

<sup>The actual driving range may greatly vary based on driving behavior, charging habits, speed, payload, terrain, accessories and weather conditions.
Payload excludes the driver (75 kg) and includes carge options. The total permissible carge weight must not be exceeded.
Battery pack capacity may naturally degrade over time and with use, which will affect vehicle overall performance.
Charging times are approximate and require Type 2 compatible charging stations. Charging losses of 20% have been included in the calculation. Technical specifications and data are true and accurate as of the publication date which may differ according to the country of sale and are subject to change without prior notice. Images provided are for illustrative purposes only and may not reflect the actual vehicle or its features. Figures provided are intended for comparability purposes only and should be compared with vehicles tested under the same technical procedures and within a similar weight class. Please check with your dealer for any local specifications.</sup> 








CARGO TYPE: BOX

WHEELBASE: LONG

BATTERY PACK: 11.52 kWh

DRIVER SEAT: MIDDLE

## **Dimensions**

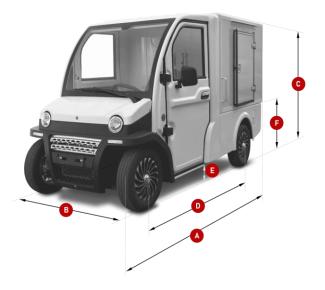

- A Length 3100 mm
- **B** Width 1250 mm 1550 mm
- Width (incl. Mirror)
- Height 1890 mm
- Wheelbase 2125 mm
- Ground Clearance 140 mm
- Cargo Bed Height 705 mm











- A Length 1510 mm
- B Width 1194 mm
- Height 1277 mm


## INSIDE MEASUREMENT

- Length 1397 mm
- **B** Width 1158 mm
- Height 1207 mm



1.95 m<sup>3</sup>

## Optional Cargo Versions

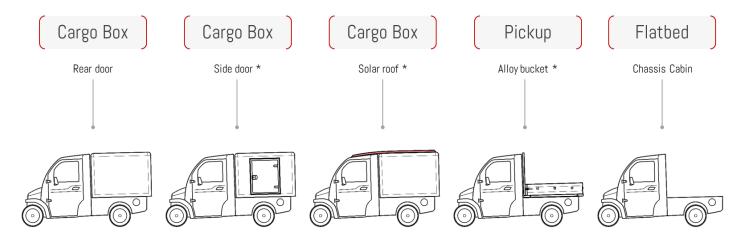

Products with (\*) are available on a build-to-order basis and are offered upon request only.