


SUTTER 300 MINI TRAIL DOZER™

THE ULTIMATE TRAIL MACHINE™

DESIGNED FOR SINGLE TRACK TRAIL CONSTRUCTION AND MAINTENANCE, PUBLIC WORKS,
CONTRACTORS, RANCHERS AND RESIDENTIAL

PROTECTED BY U.S. PATENT NO. D785,680

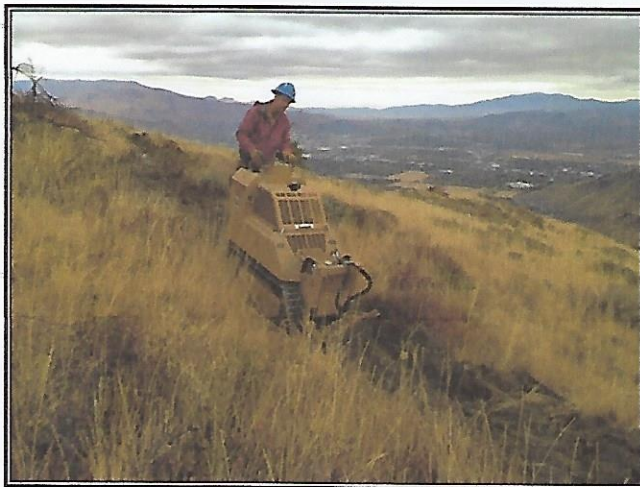

You can build approximately 1000 ft./hr. of under 30" wide single track trails. Build trails uphill with ease and rolling dips in minutes. Pay for the SUTTER 300 MINI TRAIL DOZER™ in less than one season with the savings realized from decreased labor costs.

SUTTER EQUIPMENT COMPANY, INC.*

25 Cowee Drive

MOUND HOUSE, NV 89706

Tel (775) 246-8689

**Trail Equipment Specialists since 1986*

www.sutterequipment.com

SUTTER 300 MINI TRAIL DOZER™

SPECIFICALLY DESIGNED, ENGINEERED AND TESTED FOR SINGLE TRACK TRAIL MAKING · WOOD LOTS · PARKS & REC., CITY, COUNTY, STATE & FEDERAL MAINTENANCE WORK · RANCHERS · CONTRACTORS · RESIDENTIAL

SPECIFICATIONS*

ENGINE		MISCELLANEOUS	
Make	Hatz 3H50TI Turbo	Width	29.5"
EPA Rating.....	Tier 4	Length (with blade).....	8'
Fuel.....	Diesel	Height	4'7"
Horse Power	24.7 HP @ 1400 RPM (95 ft lbs of torque)	Ground Clearance	4"
Type	4 Cylinders	Gross Weight (with blade)	4360 lbs
Cooling Medium	Water	Travel Speed	0-5 MPH
Electrical System	12 Volts	Max Blade Lift	13"
Max Inclination, all angles.....	30°	Max Blade Drop	10"
Fuel Consumption (Avg).....	1.0 Gal/Hr	Max Blade Angle.....	30°
TRANSMISSION		Max Blade Tilt.....	25°
Sauer-Danfoss twin hydrostatic pumps and Auburn Gear		STANDARD FEATURES	
70,000 in. lb. torque hubs		• Blade 6 Way with Lift & Tilt	
STEERING		• Brass Wear Plates	
Dual controls, full hydrostatic, counter rotating		• Turbo	
HYDRAULICS		• Warning Lights	
Gear pump 11 G.P.M. 1200 PSI double filtration, 10 micron		• Vandal Protection Kit	
UNDERCARRIAGE		• Tach w/Digital Hour & Volt, Fuel, Water Temp & Oil Pressure	
Make	Berco	• Hydraulic Oil Site Glass & Temp Gauge	
Track Frame	Rigid Frame	• Cold Weather Starting	
Track Rollers	4 Bottom	• Heavy Duty Engine Cooling System	
Shoes per Track	31	• Auxiliary Hydraulics	
Track Width x Length.....	7" x 48"	• Hydraulic Oil Cooler	
Ground Pressure	5.9 PSI	• Rock Guards	
SERVICE REFILL CAPACITY		• Safety Brake	
Fuel Tank.....	6½ Gal	• Dry Cell Battery	
Hydraulic System.....	19 Gal	• Arm Rests & Operator Bumper Pads	
Crankcase	6 Qt	• Operator's Seat & Platform	
Cooling System.....	3 Gal	• Winch Receiver Mounts front & back	
FRAME		• Tie Down Hooks (set of 4)	
2" and ½" high tensile steel, unitized with full belly pan, hardened steel pins and bushings, designed for heavy mini dozer services.		• Cup Holders (2)	
		• Blade Extension	
		• Powdercoat Finish	
		OPTIONS	
		• Ripper Attachment	
		• Electric Winch	
		• 3 LED Lights	
		• Strobe Light	
		• Fire Extinguisher	
		• EDC 2-Stick	

*Specifications subject to change without notice.

PROTECTED BY U.S. PATENT NO. D785,680

SUTTER EQUIPMENT COMPANY, INC.
(775) 246-8689 · www.sutterequipment.com