

GREETINGS FROM TURBO GARDENING MACHINERY

WE ARE A SPECIALIZED MANUFACTURER

dedicated to the research, development, design, and production of lawn mowers, rotary tillers, and a wide range of outdoor power equipment and accessories. Headquartered in Shangyu, Zhejiang Province, we have developed into a reputable name in the international garden machinery industry.



ZHEJIANG TURBO GARDENING MACHINERY CO., LTD.

- dan.li@turbogardening.com
- * www.turbogardening.com
- #138 East Jianghuan Rd., The East Industrial Park, Shangyu, Zhejiang, China, 312300
- +86 187 2109 6950

SCAN FOR WECHAT



www.turbogardening.com







With a strong foundation in OEM and ODM services, we provide flexible, high-quality solutions to meet the needs of global clients. Our facilities feature advanced production lines, comprehensive testing systems, and a dedicated R&D center, enabling continuous innovation and optimization for performance, durability, and sustainability.

Beyond manufacturing, we offer end-to-end support — from design and prototyping to large-scale production and quality assurance. Our experienced team works closely with clients to deliver tailored solutions, shorten time-to-market, and ensure cost efficiency, helping them succeed in competitive global markets.

Models Tested by Global Labs & Certified.



BSCI Report



CE (gasoline products)



CE (electric products)



EURO V



ISO 9001



SGS



Noise



EMC

66 Design, Development & Invention Patents.































Innovation-Driven Growth



Quality Guaranteed



Timly Delivery



Long-term Cooperation













Customer Centric Global Market Expansion OEM & ODM Excellence Sustainable Manufacturing



Gasoline & Electric Lawn Mowers, Engines & Trimmers







Tillers, Scarifiers, Spare Parts & Others

1	Front-Tine Tillers	66	
Ю	Horizontal Gasoline Engines	70	
	Reverse Gear Tiller	72	
	Rear-Tine Tiller	75	

-	Gasoline Scarifier	79
(<u></u>	Inverter Generator	82
	Spare Parts	84
	Protective Gears	87

Understanding Turbo Lawn Mower Model Numbers



S: Self Propelled

P: Hand Pushed

1: Turbo

2: Briggs & Stratton

3: Loncin

4: RATO

5: Honda

TB 53 S 1 1 E

56cm (22 inch)

53cm (21 inch)

51cm (20 inch)

46cm (18 inch)

43cm (17 inch)

40cm (16 inch)

1: With side discharge

0: No side discharge

Electric Start









TB40S01A		♣ 25KG ← 65×52×42cm ♣ 492pcs
Turbo Powered	VIRBO	Gross Weight Carton Dimensions MOQ (40Hd
Engine Model	TB1P65F	Cutting Width 400mm
Engine Power	2.7kW (3.6HP)	Cutting Height 25-75mm
Engine Speed	2800rpm	Height Adjustment 7-level central adjustment
Engine Displacement	139cc	Noise Level 96dB(A)
Starting System	Recoil	Blade Straight blade
Deck Material	Steel	Wheel (inch) Front 6, rear 8
Walk Type	Self-propelled	Grass Catcher Capacity 40L, fabric bag
Discharge	Rear	



16-inch Hand-push Models (400mm)



TB40P01A

Turbo Powered	TI IRBO	/40	65×48×38cm Carton Dimensions 630pcs MOQ (40HQ)
IUIDO FOWGIGU	- UNDE	aross weight	Carton Dimensions — wea (4011a)
Engine Model	TB1P65F	Cutting Width	400mm
Engine Power	2.7kW (3.6HP)	Cutting Height	30-60mm
Engine Speed	2800rpm	Height Adjustment	3 (four wheels adjustment)
Engine Displacement	139cc	Noise Level	96dB(A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Plastic	Wheel (inch)	Front 6, rear 6
Walk Type	Hand push	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		



TRANDO2

I D4UPUZ		0 041/0	05.40.00
B&S Powered	EGGOSS STORTON		65×48×38cm Carton Dimensions 630pcs MOQ (40HQ)
Engine Model	BS450E	Cutting Width	400mm
Engine Power	1.8kW (2.4HP)	Cutting Height	30-60mm
Engine Speed	2800rpm	Height Adjustment	3 (four wheels adjustment)
Engine Displacement	125cc	Noise Level	96dB(A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 6
Walk Type	Hand push	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		



IB4UPU3A		0 041/0	654000
Loncin Powered	LONCIN	/40	65×48×38cm Carton Dimensions G30pcs MOQ (40HQ)
Engine Model	LC1P65FE-3	Cutting Width	400mm
Engine Power	2.1kW (2.8HP)	Cutting Height	30-60mm
Engine Speed	2800rpm	Height Adjustment	3 (four wheels adjustment)
Engine Displacement	123cc	Noise Level	96dB(A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 6
Walk Type	Hand push	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		



1B40P04		0 0440	05 40 00 5 000
RATO Powered	RNTO		65×48×38cm Carton Dimensions 630pcs MOQ (40F
Engine Model	RV125-S	Cutting Width	400mm
Engine Power	2.0kW (2.7HP)	Cutting Height	30-60mm
Engine Speed	2800rpm	Height Adjustment	3 (four wheels adjustment)
Engine Displacement	127cc	Noise Level	96dB(A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 6
Walk Type	Hand push	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		

16-inch Self-propelled Models (400mm)

TB40S01A

25KG 65×52×42cm 492pcs **Turbo Powered** MOQ (40HQ) Engine Model TB1P65F Cutting Width 400mm Engine Power 2.7kW (3.6HP) Cutting Height 25-75mm Engine Speed 2800rpm Height Adjustment 7-level central adjustment Engine Displacement 139cc Noise Level 96dB(A) Starting System Recoil Blade Straight blade Deck Material Steel Wheel (inch) Front 6, rear 8 Walk Type Self-propelled Grass Catcher Capacity 40L, fabric bag Discharge Rear



TB40S02

IDTUUL		♣ 25KG 🗢	65×52×42cm
B&S Powered	REGOOD - GEOWTON	/40/	65×52×42cm Carton Dimensions 492pcs MOQ (40HQ)
Engine Model	BS450E	Cutting Width	400mm
Engine Power	1.8kW (2.4HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	125cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Self-propelled	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		



TB40S03

1040303		25KG	→ 65×52×42cm	
Loncin Powered	ELONCIN	Gross Weight	Carton Dimensions	492pcs MOQ (40HQ)
Engine Model	LC1P65FE	Cutting Wi	dth 400mm	
Engine Power	2.4kW (3.2HP)	Cutting Hei	ght 25-75mm	
Engine Speed	2800rpm	Height Adjustm	ent 7-level central	adjustment
Engine Displacement	139cc	Noise Le	evel 96dB (A)	
Starting System	Recoil	Bla	ade Straight blade	
Deck Material	Steel	Wheel (in	ch) Front 6, rear 8	
Walk Type	Self-propelled	Grass Catcher Capac	city 40L, fabric bag	
Discharge	Rear			



TB40S04

IDTUSUT		♣ 25KG 👝	65×52×42cm — 492pcs
RATO Powered	RNTO		65×52×42cm Carton Dimensions 492pcs MOQ (40HQ)
Engine Model	RV125-S	Cutting Width	400mm
Engine Power	2.0kW (2.7HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	127cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Self-propelled	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		









TB43S01A	26KG
Turbo Powered	Gross Weight Carton Dimensions MOQ (40HQ)
Engine Model TB1P65F	Cutting Width 430mm
Engine Power 2.7kW (3.6HP)	Cutting Height 25-75mm
Engine Speed 2800rpm	Height Adjustment 6-level central adjustment
Engine Displacement 139cc	Noise Level 96dB (A)
Starting System Recoil	Blade Straight blade
Deck Material Steel	Wheel (inch) Front 6, rear 8
Walk Type Self-propelled	Grass Catcher Capacity 40L, half plastic bag
Discharge Rear	

17-inch Hand-push Models (430mm)



TB43P01A

Turbo Powered	URBO	/40	69×52×44cm Carton Dimensions 444pcs MOQ (40HQ)
Engine Model	TB1P65F	Cutting Width	430mm
Engine Power	2.7kW (3.6HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	6-level central adjustment
Engine Displacement	139cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Hand push	Grass Catcher Capacity	40L, half plastic bag
Discharge	Rear		



TR/2D02

ID43FUZ		26KG	69×52×42cm	444pcs
B&S Powered	REMODE ATTENTION	Gross Weight	Carton Dimensions	MOQ (40HQ)
Engine Model	BS450E	Cutting	Width 430mm	
Engine Power	1.8kW (2.4HP)	Cutting F	Height 25-75mm	
Engine Speed	2800rpm	Height Adjus	tment 6-level central	adjustment
Engine Displacement	125cc	Noise	Level 96dB (A)	
Starting System	Recoil		Blade Straight blade	
Deck Material	Steel	Wheel	(inch) Front 6, rear 8	
Walk Type	Hand push	Grass Catcher Cap	pacity 40L, fabric bag	g
Discharge	Rear			







TR/2DN/

1D43PU4		O seko —	654929am
RATO Powered	RNTO		65×48×38cm Carton Dimensions Address MOQ (40HQ)
Engine Model	RV125-S	Cutting Width	430mm
Engine Power	2.0kW (2.7HP)	Cutting Height	25 - 75mm
Engine Speed	2800rpm	Height Adjustment	6-level central adjustment
Engine Displacement	127cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Hand push	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		

17-inch Self-propelled Models (430mm)

TB43S01A

		26KG	\sim	69×52×44cm	444pcs
Turbo Powered	WIRBO	Gross Weight		Carton Dimensions	MOQ (40HQ)
Engine Model	TB1P65F	Cutting V	Vidth	430mm	
Engine Power	2.7kW (3.6HP)	Cutting H	leight	25-75mm	
Engine Speed	2800rpm	Height Adjust	ment	6-level central ad	ljustment
Engine Displacement	139cc	Noise I	Level	96dB (A)	
Starting System	Recoil	E	Blade	Straight blade	
Deck Material	Steel	Wheel ((inch)	Front 6, rear 8	
Walk Type	Self-propelled	Grass Catcher Cap	acity	40L, fabric bag	
Discharge	Rear				



TB43S02

IDTUUL		O seve	∆ 65×52×42cm
B&S Powered	ROSOS - STORTON	26KG Gross Weight	65x52x42cm 444pcs Carton Dimensions MOQ (40HQ)
Engine Model	BS450E	Cutting Widt	th 430mm
Engine Power	1.8kW (2.4HP)	Cutting Heigl	ht 25-75mm
Engine Speed	2800rpm	Height Adjustme	nt 6-level central adjustment
Engine Displacement	125cc	Noise Lev	el 96dB (A)
Starting System	Recoil	Blac	ie Straight blade
Deck Material	Steel	Wheel (incl	h) Front 6, rear 8
Walk Type	Self-propelled	Grass Catcher Capaci	ty 40L, fabric bag
Discharge	Rear		



TB43S03

1040000		26KG	69×52×44cm
Loncin Powered	E LONCIN	In a second	Carton Dimensions MOQ (40HQ)
Engine Model	LC1P65FE	Cutting Width	430mm
Engine Power	2.4kW (3.2HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	6-level central adjustment
Engine Displacement	139cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Self-propelled	Grass Catcher Capacity	40L, fabric bag
Discharge	Rear		



TB43S04

_ I DT	JUUT		△ 26KG	$\overline{}$	CEEQ 420mm	
RATO P	owered	RNTO	Gross Weight		65×52×42cm Carton Dimensions	444pcs MOQ (40HQ)
E	ngine Model	RV125-S	Cutting	Width	430mm	
E	ngine Power	2.0kW (2.7HP)	Cutting	Height	25-75mm	
Е	ngine Speed	2800rpm	Height Adjus	stment	6-level central a	djustment
Engine D	isplacement	127cc	Noise	Level	96dB (A)	
Sta	rting System	Recoil		Blade	Straight blade	
	eck Material	Steel	Wheel	(inch)	Front 6, rear 8	
	Walk Type	Self-propelled	Grass Catcher Ca	pacity	40L, fabric bag	
	Discharge	Rear				









IB405IIE		△ 35KG	9×57×49cm 🚗 300pcs
Turbo Powered	VIRBO	Gross Weight C	arton Dimensions MOQ (40HQ)
Engine Model	TB1P65F	Cutting Width	460mm
Engine Power	2.7kW (3.6HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	139cc	Noise Level	96dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 7, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Washing hole

TD/CC11E



18-inch Hand-push Models (460mm)



TB46P01

Turbo Powered	WRBO	/40	76×57×44cm Carton Dimensions 377pcs MOQ (40HQ)
Engine Model	TB1P65F	Cutting Width	460mm
Engine Power	2.7kW (3.6HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	139cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Hand push	Grass Catcher Capacity	60L, fabric bag
Discharge	Rear		



1B46PUZ		_	
B&S Powered	EGGOOS, ATOMTON	/40	76×57×44cm Carton Dimensions 377pcs MOQ (40HQ)
Engine Model	BS500E	Cutting Width	460mm
Engine Power	2.1kW (2.8HP)	Cutting Height	25 - 75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	140cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Hand push	Grass Catcher Capacity	60L, fabric bag
Discharge	Rear		



TR46P03

ID40FU3		35KG	76×57×48cm
Loncin Powered	LONCIN	/uo\	76×57×48cm Carton Dimensions 377pcs MOQ (40HQ)
Engine Model	LC1P65FE	Cutting Width	460mm
Engine Power	2.4kW (3.2HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	139cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Hand push	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear		



1B46PU4		0 251/0 -	
RATO Powered	RNTO	35KG Gross Weight	76×57×48cm Carton Dimensions 377pcs MOQ (40HC
Engine Model	RV125-S	Cutting Width	460mm
Engine Power	2.0kW (2.7HP)	Cutting Height	25 - 75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	127cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 6, rear 8
Walk Type	Hand push	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear		

18-inch Self-propelled Models (460mm)

TB46S11

35KG 79×57×49cm **Turbo Powered** Engine Model TB1P65F Cutting Width 460mm Engine Power 2.7kW (3.6HP) Cutting Height 25-75mm Engine Speed 2800rpm Height Adjustment 7-level central adjustment Engine Displacement 139cc Noise Level 96dB (A) Blade Straight blade Starting System Recoil Deck Material Steel Wheel (inch) Front 7, rear 10 Grass Catcher Capacity 60L, half plastic bag Walk Type Self-propelled Discharge Rear, side discharge, mulching Features 1. Foamed upper handle 2. Front handle 3. Control panel 4. Washing hole



TB46S12

1040312		△ 35KG 🔼	79×57×49cm 🐣 300pcs
B&S Powered	(REMODS: OTOMTOM)	wal	Carton Dimensions MOQ (40HQ)
Engine Model	BS500E	Cutting Width	460mm
Engine Power	2.1kW (2.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	140cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 7, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TB46S13A

Loncin Powered	E KAMH LONCIN	No.	79×57×49cm Sarton Dimensions Sarton Dimensions Sarton Dimensions Sarton MOQ (40HG
Engine Model	LC1P65FC	Cutting Width	460mm
Engine Power	2.7kW (3.6HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	159cc	Noise Level	96dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 7, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge, mulching	Features	Foamed upper handle Front handle Control panel Washing hole



TB46S14

	△ 35KG	
RATO Powered RATO	ue =	79×57×49cm 300pcs Carton Dimensions MOQ (40H)
Engine Model RV125-S	Cutting Width	460mm
Engine Power 2.0kW (2.7HP)	Cutting Height	25-75mm
Engine Speed 2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement 127cc	Noise Level	96dB (A)
Starting System Recoil	Blade	Straight blade
Deck Material Steel	Wheel (inch)	Front 7, rear 10
Walk Type Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge Rear, side discharge, mulching	Features	Foamed upper handle Front handle Control panel Washing hole











IR31211E	,	40KG 👝 83	3×57×49cm 🚗 285pcs
Turbo Powered	URBO	Gross Weight C	arton Dimensions MOQ (40HQ)
Engine Model	TB1P70FA	Cutting Width	510mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Washing hole

TDE4044E

20-inch Models (510mm)



TB51P01

		♣ 40KG 🔼	83×57×49cm — 285pcs
Turbo Powered	URBO	Gross Weight	Carton Dimensions MOQ (40HQ)
Engine Model	TB1P70FA	Cutting Width	510mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Hand push	Grass Catcher Capacity	60L, half plastic bag
	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TB51P03		0 4000	83×57×49cm —— 285pcs
Loncin Powered	E LONCIN	/40/	83×57×49cm Carton Dimensions 285pcs MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width	510mm
Engine Power	3.5kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Hand push	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TB51S01

Turbo Powered		A 40KG A 83×57×49cm A 28	
idibo i overed	VIRBO	/40\ _ _	35pcs OQ (40H
Engine Model	TB1P70FA	Cutting Width 510mm	
Engine Power	3.6kW (4.8HP)	Cutting Height 25-75mm	
Engine Speed	2800rpm	Height Adjustment 7-level central adjustment	nt
Engine Displacement	173cc	Noise Level 98dB (A)	
Starting System	Recoil	Blade Straight blade	
Deck Material	Steel	Wheel (inch) Front 8, rear 10	
Walk Type	Self-propelled	Grass Catcher Capacity 60L, half plastic bag	
Discharge	Rear, mulching	Features 1. Foamed upper handle)
		2. Front handle	
		3. Control panel	
		4. Washing hole	



TB51S03

1001000		♣ 40KG 👝 8	83×57×49cm 🚗 285pcs
Loncin Powered	LONCIN		83×57×49cm Carton Dimensions 285pcs MOQ (40F
Engine Model	LC1P70FC	Cutting Width	510mm
Engine Power	3.5kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge I	Rear, mulching	Features	1. Foamed upper handle
			2. Front handle
			3. Control panel
			4. Washing hole

20-inch Models (510mm)

TB51S11

Turbo Powered	URBO	/we	Carton Dimensions 285pcs MOQ (40HQ)
Engine Model	TB1P70FA	Cutting Width	510mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharg	ge, Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TB51S11E

		40KG	83×57×49cm — 285pcs
Turbo Powered	TURBO	/wa	Carton Dimensions MOQ (40HQ)
Engine Model TI	B1P70FA	Cutting Width	510mm
Engine Power 3.	.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed 28	800rpm	Height Adjustment	7-level central adjustment
Engine Displacement 17	73cc	Noise Level	98dB (A)
Starting System R	ecoil & electric start	Blade	Straight blade
Deck Material St	teel	Wheel (inch)	Front 8, rear 10
Walk Type So	elf-propelled	Grass Catcher Capacity	60L, half plastic bag
	ear, side discharge,	Features	1. Foamed upper handle
m	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TB51S13A

IDOIOIOA		40KG 🔼	83×57×49cm
Loncin Powered	LONCIN	Gross Weight	Carton Dimensions 285pcs MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width	510mm
Engine Power	3.5kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge	, Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TB51S13AE

IBD1913AE		△ 40KG △	83×57×49cm
Loncin Powered	LONCIN	/##\	83×57×49cm 285pcs Carton Dimensions MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width	510mm
Engine Power	3.5kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge, mulching	Features	Foamed upper handle Front handle Control panel Washing hole







IR33211E	,	42KG	6×57×49cm — 270pcs
Turbo Powered	URBO	Gross Weight C	arton Dimensions MOQ (40HQ)
Engine Model	TB1P70FA	Cutting Width	530mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole

TDE2C11E



21-inch Self-propelled Models (530mm)



TB53S11

	42KG	86×57×49cm 🖰 270pcs
WIREO .	/40	Carton Dimensions 210pcs MOQ (40HQ)
TB1P70FA	Cutting Width	530mm
3.6kW (4.8HP)	Cutting Height	25-75mm
2800rpm	Height Adjustment	7-level central adjustment
173cc	Noise Level	98dB (A)
Recoil	Blade	Straight blade
Steel	Wheel (inch)	Front 8, rear 10
Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Rear, side discharge,	Features	1. Foamed upper handle
mulching		2. Front handle
		3. Control panel
		4. Washing hole
	TB1P70FA 3.6kW (4.8HP) 2800rpm 173cc Recoil Steel Self-propelled	TB1P70FA Cutting Width 3.6kW (4.8HP) Cutting Height 2800rpm Height Adjustment 173cc Noise Level Recoil Blade Steel Wheel (inch) Self-propelled Grass Catcher Capacity Rear, side discharge, Features



TR53S11R

1R23211R		0 4000	06-57-40
Turbo Powered	TURBO	/4/0	86×57×49cm Carton Dimensions 270pcs MOQ (40HQ)
Engine Model	TB1P70FB	Cutting Width	530mm
Engine Power	4.0kW (5.4HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TR53S13

ווסטטוו	•	△ 42KG
Loncin Powered	E MERIALIN	Gross Weight Carton Dimensions MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width 530mm
Engine Power	3.5kW (4.8HP)	Cutting Height 25-75mm
Engine Speed	2800rpm	Height Adjustment 7-level central adjustment
Engine Displacement	196cc	Noise Level 98dB (A)
Starting System	Recoil	Blade Straight blade
Deck Material	Steel	Wheel (inch) Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity 60L, half plastic bag
Discharge	Rear, side discharge,	Features 1. Foamed upper handle
	mulching	2. Front handle
		3. Control panel
		4. Washing hole



TB53S13B

ם כו סטטם ו		♣ 42KG
Loncin Powered	E Loncin	Gross Weight Carton Dimensions 270pts MOQ (40
Engine Model	V200	Cutting Width 530mm
Engine Power	4.0kW (5.4HP)	Cutting Height 25-75mm
Engine Speed	2800rpm	Height Adjustment 7-level central adjustment
Engine Displacement	196cc	Noise Level 98dB (A)
Starting System	Recoil	Blade Straight blade
Deck Material	Steel	Wheel (inch) Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity 60L, half plastic bag
Discharge		Features 1. Foamed upper handle
	mulching	2. Front handle
		3. Control panel
		4. Washing hole

21-inch Self-propelled Models (530mm)

TB53S11E

42KG 86×57×49cm 270pcs Turbo Powered MOQ (40HQ) Engine Model TB1P70FA Cutting Width 530mm Engine Power 3.6kW (4.8HP) Cutting Height 25-75mm Engine Speed 2800rpm Height Adjustment 7-level central adjustment Engine Displacement 173cc Noise Level 98dB (A) Starting System Recoil & electric start Blade Straight blade Deck Material Steel Wheel (inch) Front 8, rear 10 Walk Type Self-propelled Grass Catcher Capacity 60L, half plastic bag Discharge Rear, side discharge, mulching Features 1. Foamed upper handle 2. Front handle 3. Control panel 4. Washing hole



TB53S11B

IDJJJIID	_	△ 42KG	86×57×49cm
Turbo Powered	TURBO	Gross Weight	Carton Dimensions Z/Opcs MOQ (40HQ)
Engine Model	TB1P70FB	Cutting Width	530mm
Engine Power	4.0kW (5.4HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge, mulching	Features	Foamed upper handle Front handle Control panel
			Washing hole



TB53S13E

IDOGGIGE		♣ 42KG 🔼	86×57×49cm — 270pcs
Loncin Powered	LONCIN	/wel	Carton Dimensions MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width	530mm
Engine Power	3.5kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole



TB53S13BE

Loncin Powered	E LONCIN	42KG Gross Weight	86×57×49cm 270pcs Carton Dimensions AOQ (40H
Engine Model	V200	Cutting Width	530mm
Engine Power	4.0kW (5.4HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge, mulching	Features	Foamed upper handle Front handle Control panel Washing hole









1B26211F		♣ 44KG 👝 9	1×61×49cm 🐣 225pcs
Turbo Powered	URBO	Gross Weight C	arton Dimensions MOQ (40H)
Engine Model	TB1P70FA	Cutting Width	560mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	8-level central adjustment
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear,	Features	1. Foamed upper handle
	side discharge,		2. Front handle
	mulching		3. Control panel
			4. Washing hole



22-inch Self-propelled Models (560mm)



TB56S11

		△ 44KG	91×61×49cm 🖰 225pcs
Turbo Powered	WIRBO	/uo\	Carton Dimensions MOQ (40HQ)
Engine Model	TB1P70FA	Cutting Width	560mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	8-level central adjustment
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge		Features	1. Foamed upper handle
	side discharge, mulching		2. Front handle
	g		3. Control panel
			4. Washing hole



	.
URBO	44KG Gross Weight Gross Weight Gross Weight Granton Dimensions 225pcs MOQ (40HQ)
TB1P70FB	Cutting Width 560mm
4.0kW (5.4HP)	Cutting Height 25-75mm
2800rpm	Height Adjustment 8-level central adjustment
196cc	Noise Level 98dB (A)
Recoil	Blade Straight blade
Steel	Wheel (inch) Front 8, rear 10
Self-propelled	Grass Catcher Capacity 60L, half plastic bag
Rear,	Features 1. Foamed upper handle
	2. Front handle
	3. Control panel
	4. Washing hole
	TB1P70FB 4.0kW (5.4HP) 2800rpm 196cc Recoil Steel Self-propelled



TR56C12

1000010		♣ 44KG ➡ 91×61×49cm ♣ 225pcs
Loncin Powered	E LONCIN	Gross Weight Strong Carton Dimensions 2250cs MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width 560mm
Engine Power	3.5kW (4.8HP)	Cutting Height 25-75mm
Engine Speed	2800rpm	Height Adjustment 8-level central adjustment
Engine Displacement	196cc	Noise Level 98dB (A)
Starting System	Recoil	Blade Straight blade
Deck Material	Steel	Wheel (inch) Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity 60L, half plastic bag
Discharge		Features 1. Foamed upper handle
	side discharge, mulching	2. Front handle
	3	3. Control panel
		4. Washing hole



TB56S13A

Loncin Powered	LONCIN	/40/ [_]	225pcs 10Q (40HQ
Engine Model	V200	Cutting Width 560mm	
Engine Power	4.0kW (5.4HP)	Cutting Height 25-75mm	
Engine Speed	2800rpm	Height Adjustment 8-level central adjustme	ent
Engine Displacement	196cc	Noise Level 98dB (A)	
Starting System	Recoil	Blade Straight blade	
Deck Material	Steel	Wheel (inch) Front 8, rear 10	
Walk Type	Self-propelled	Grass Catcher Capacity 60L, half plastic bag	
Discharge		Features 1. Foamed upper handl	le
	side discharge, mulching	2. Front handle	
	J	3. Control panel	
		4. Washing hole	

22-inch Self-propelled Models (560mm)



TB56S11E

Turbo Powered









IUIDO FUWCICU	- OKDE		Caron Dimensions
Engine Model	TB1P65F	Cutting Width	560mm
Engine Power	2.7kW (3.6HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	8-level central adjustment
Engine Displacement	139cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge		Features	 Foamed upper handle
	side discharge, mulching		2. Front handle
	J		3. Control panel
			4. Washing hole

44KG



TB56S11BE

Turbo Powered



WIRBO











Engine Model
Engine Power
Engine Speed
Engine Displacement
Starting System
Deck Material

TB1P70FB 4.0kW (5.4HP) 2800rpm 196cc Recoil & electric start Steel Walk Type Self-propelled Discharge Rear, side discharge, mulching

Gross Weight

Cutting Width 560mm Cutting Height 25-75mm

Wheel (inch) Front 8, rear 10

Height Adjustment 8-level central adjustment Noise Level 98dB (A) Blade Straight blade

Grass Catcher Capacity 60L, half plastic bag Features 1. Foamed upper handle

2. Front handle

3. Control panel 4. Washing hole

TB56S13E













Loncin Powerea
Engine Model
Engine Power
Engine Speed
Engine Displacement
Starting System
Deck Material
Walk Type
Discharge

LC1P70FC 3.5kW (4.8HP) 2800rpm 196cc Recoil & electric start Steel Self-propelled Rear, side discharge, mulching

Cutting Width 560mm Cutting Height 25-75mm Height Adjustment 8-level central adjustment Noise Level 98dB (A) Blade Straight blade Wheel (inch) Front 8, rear 10 Grass Catcher Capacity 60L, half plastic bag Features 1. Foamed upper handle 2. Front handle 3. Control panel 4. Washing hole



TB56S13AE

Loncin Powered





44KG





225pcs

Engine Model	V200
Engine Power	4.0kW (5.4
Engine Speed	2800rpm
Engine Displacement	196cc
Starting System	Recoil & e
Deck Material	Steel
Walk Type	Self-prope
Discharge	Rear, side disch mulching

V200 Cutting Width 560mm 4.0kW (5.4HP) 2800rpm 196cc Recoil & electric start Steel Self-propelled Rear, side discharge,

Cutting Height 25-75mm Height Adjustment 8-level central adjustment Noise Level 98dB (A) Blade Straight blade Wheel (inch) Front 8, rear 10 Grass Catcher Capacity 60L, half plastic bag Features 1. Foamed upper handle 2. Front handle 3. Control panel

4. Washing hole







22-inch Speed Adjustable Models (560mm)



TB56S11

Turbo Powered	TURBO	/40	91×61×49cm Carton Dimensions 225pcs MOQ (40HQ)
Engine Model	TB1P70FA	Cutting Width	560mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	8-level central adjustment
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge		Features	1. Foamed upper handle
	side discharge, mulching		2. Front handle
			3. Control panel
			4. Washing hole



TR56S11A

1B26211A		0 441/0 - 041/041/4020 - 0 005020
Turbo Powered	URBO	44KG Gross Weight 91x61x49cm Carton Dimensions 4225pcs MOQ (40HQ)
Engine Model	TB1P70FB	Cutting Width 560mm
Engine Power	4.0kW (5.4HP)	Cutting Height 25-75mm
Engine Speed	2800rpm	Height Adjustment 8-level central adjustment
Engine Displacement	196cc	Noise Level 98dB (A)
Starting System	Recoil	Blade Straight blade
Deck Material	Steel	Wheel (inch) Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity 60L, half plastic bag
Discharge		Features 1. Foamed upper handle
	side discharge, mu l ching	2. Front handle
	g	3. Control panel
		4. Washing hole



TB56S13

1000010		♣ 44KG 🔼	91×61×49cm — 225pcs
Loncin Powered	LONCIN	/40/	91×61×49cm Carton Dimensions 225pcs MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width	560mm
Engine Power	3.5kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	8-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge, mulching	Features	Foamed upper handle Front handle Control panel
			4. Washing hole



TB56S13A

IDUUUIUA		0 44KC
Loncin Powered	LONCIN	44KG Gross Weight Gross Weight Garton Dimensions 44KG MOQ (40t)
Engine Model	V200	Cutting Width 560mm
Engine Power	4.0kW (5.4HP)	Cutting Height 25-75mm
Engine Speed	2800rpm	Height Adjustment 8-level central adjustment
Engine Displacement	196cc	Noise Level 98dB (A)
Starting System	Recoil	Blade Straight blade
Deck Material	Steel	Wheel (inch) Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity 60L, half plastic bag
Discharge		Features 1. Foamed upper handle
	side discharge, mulching	2. Front handle
		3. Control panel
		4. Washing hole

22-inch Speed Adjustable Models (560mm)

225pcs



TB56S11E

Turbo Powered Engine Model TB1P65F Cutting Width 560mm Engine Power 2.7kW (3.6HP) Cutting Height 25-75mm Engine Speed 2800rpm Height Adjustment 8-level central adjustment Engine Displacement 139cc Noise Level 98dB (A) Starting System Recoil & electric start Blade Straight blade Deck Material Steel Wheel (inch) Front 8, rear 10 Walk Type Self-propelled Grass Catcher Capacity 60L, half plastic bag Discharge Rear, side discharge, Features 1. Foamed upper handle 2. Front handle mulching

44KG

91×61×49cm

3. Control panel 4. Washing hole



TB56S11BE

44KG
Gross Weight Carton Dimensions MOQ (40HK
Cutting Width 560mm
Cutting Height 25-75mm
Height Adjustment 8-level central adjustment
Noise Level 98dB (A)
rt Blade Straight blade
Wheel (inch) Front 8, rear 10
Grass Catcher Capacity 60L, half plastic bag
Features 1. Foamed upper handle
2. Front handle
3. Control panel
4. Washing hole
r



TB56S13E

Loncin Powered	E MANH LONCIN	/wel	91×61×49cm 225pcs Carton Dimensions MOQ (40HQ)
Engine Model	LC1P70FC	Cutting Width	560mm
Engine Power	3.5kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	8-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			Washing hole




TB56S13AE

IDUUGIUAL		0 4480 -	04-04-40
Loncin Powered	LONCIN	lue l	91×61×49cm 225pcs Carton Dimensions MOQ (40HQ)
Engine Model	V200	Cutting Width	560mm
Engine Power	4.0kW (5.4HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	8-level central adjustment
Engine Displacement	196cc	Noise Level	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge, mulching	Features	Foamed upper handle Front handle Control panel Washing hole







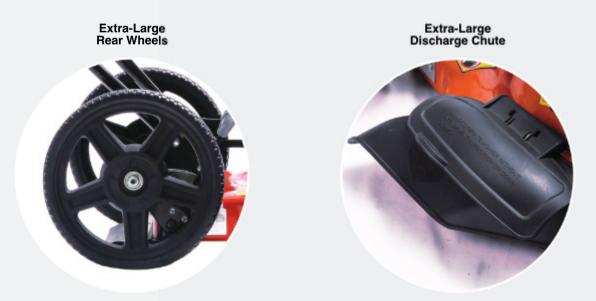

All models are customizable.



450mm Side-Discharge Models



TB45P01

12 101 01		🕰 29KG	71×56×38cm	469pcs
Turbo Powered	VIRBO	Gross Weight	Carton Dimensions	MOQ (40HQ)
Engine Model	TB1P65F	Dis	charge Side discharge	•
Engine Power	2.7kW (3.7HP)	Cutting	g Width 450mm	
Engine Speed	2800rpm	Cutting	Height 25-75mm	
Engine Displacement	139cc	Height Adju	stment 5-level central	adjustment
Starting System	Recoil	Nois	e Level 96dB (A)	
Deck Material	Steel		Blade Straight blade	
Walk Type	Hand push	Whee	el (inch) Front 7, rear 7	



1B45PU2		
B&S Powered	(E04005-670WTOW)	29KG Gross Weight 71x56x38cm Additional Part of the Pa
Engine Model	BS500E	Discharge Side discharge
Engine Power	2.1kW (2.8HP)	Cutting Width 450mm
Engine Speed	2800rpm	Cutting Height 25-75mm
Engine Displacement	140cc	Height Adjustment 5-level central adjustment
Starting System	Recoil	Noise Level 96dB (A)
Deck Material	Steel	Blade Straight blade
Walk Type	Hand push	Wheel (inch) Front 7, rear 7



1B45PU3		0 0000 - 74,5000	0
Loncin Powered	LONCIN	29KG Gross Weight T1×56×3 Carton Din	
Engine Model	LC1P65FE	Discharge Side d	ischarge
Engine Power	2.4kW (3.2HP)	Cutting Width 450mr	n
Engine Speed	2800rpm	Cutting Height 25-75r	nm
Engine Displacement	139cc	Height Adjustment 5-level	central adjustment
Starting System	Recoil	Noise Level 96dB (A)
Deck Material	Steel	Blade Straigl	nt blade
Walk Type	Hand push	Wheel (inch) Front 7	7, rear 7



TB45P04C			
RATO Powered	RNTO		71×56×38cm Carton Dimensions A69pcs MOQ (40Ho
Engine Model	RV145-S	Discharge	Side discharge
Engine Power	2.5kW (3.4HP)	Cutting Width	450mm
Engine Speed	2800rpm	Cutting Height	25-75mm
Engine Displacement	144cc	Height Adjustment	5-level central adjustment
Starting System	Recoil	Noise Level	96dB (A)
Deck Material	Steel	Blade	Straight blade
Walk Type	Hand push	Wheel (inch)	Front 7, rear 7

500mm Side-Discharge Models



TB50P01

<u> </u>		0	31KG	$\overline{}$	84×56×42cm	336pcs
Turbo Powered	TURBO	KG)	Gross Weight		Carton Dimensions	MOQ (40HQ)
Engine Model	TB1P70FA		Disc	harge	Side discharge	
Engine Power	3.6kW (4.8HP)		Cutting	Width	500mm	
Engine Speed	2800rpm		Cutting I	Height	25-75mm	
Engine Displacement	173cc		Height Adjus	tment	5-level central a	djustment
Starting System	Recoil		Noise	Level	98dB (A)	
Deck Material	Steel			Blade	Straight blade	
Walk Type	Hand push		Wheel	(inch)	Front 8, rear 12	



TB50P02

I DOOL OF	-	0	31KG	$\overline{}$	84×56×42cm	336pcs
B&S Powered	REMODS - STEWTON	KG	Gross Weight		Carton Dimensions	MOQ (40HQ)
Engine Model	BS500E		Disc	charge	Side discharge	
Engine Power	2.1kW (2.8HP)		Cutting	Width	500mm	
Engine Speed	2800rpm		Cutting	Height	25-75mm	
Engine Displacement	140cc		Height Adjus	stment	5-level central a	djustment
Starting System	Recoil		Noise	Level	98dB (A)	
Deck Material	Steel			Blade	Straight blade	
Walk Type	Hand push		Whee	l (inch)	Front 8, rear 12	



TR50P03

1 0001 00		0	31KG	$\overline{}$	84×56×42cm	O 220mm
Loncin Powered	E LONCIN	KG	Gross Weight		Carton Dimensions	336pcs MOQ (40HQ)
Engine Model	LC1P65FC		Disc	harge	Side discharge	
Engine Power	2.7kW (3.6HP)		Cutting	Width	500mm	
Engine Speed	2800rpm		Cutting I	Height	25-75mm	
Engine Displacement	159cc		Height Adjus	tment	5-level central a	djustment
Starting System	Recoil		Noise	Level	98dB (A)	
Deck Material	Steel			Blade	Straight blade	
Walk Type	Hand push		Wheel	(inch)	Front 8, rear 12	



TB50P04

		•	31KG	$\overline{}$	84×56×42cm	336pcs
RATO Powered	RNTO	KG	Gross Weight		Carton Dimensions	мод ноно
Engine Model	RV170-S		Dis	charge	Side discharge	
Engine Power	2.8kW (3.8HP)		Cutting	Width	500mm	
Engine Speed	2800rpm		Cutting	Height	25-75mm	
Engine Displacement	170cc		Height Adju	stment	5-level central a	djustment
Starting System	Recoil		Noise	e Level	98dB (A)	
Deck Material	Steel			Blade	Straight blade	
Walk Type	Hand push		Whee	l (inch)	Front 8, rear 12	







OPTIONAL COVERS



ZERO-TURN MOWER

_		→ 50KG	270pcs
Turbo Powered	JIRBO	(KG) Gross Weigh	t Carton Dimensions MOQ (40)
Engine Model	TB1P70FA	Cutting Width	510mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustment	7 (center height adjustment)
Engine Displacement	173cc	Noise Level	98dB (A)
Starting System	Recoil	Blade	Straight blade
Deck Material	Steel	Wheel (inch)	Front 8,Rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	65L, half plastic grass bag
Discharge	Rear, side discharge,	Features	1. Two ZERO-TURN swivel wheels
	mulching		2. Interlocked central height adjustment
			3. Grass comb
			4. Upgraded chassis



ALWAYS LEVELLED CENTRAL HEIGHT ADJUSTMENT

Central Height
Always Levelled to Ground



Bottom Cover Fully Protected Engine & Belt





One-handed
Directional Lock



Curled Rim for Enhanced Chassis Durability






OPTIONAL COVERS



DOIDILE		40KG	3×57×49cm
Turbo Powered	WIRBO	We	Carton Dimensions MOQ (40Ho
Engine Model	TB1P70FA	Cutting Width	510mm
Engine Power	3.6kW (4.8HP)	Cutting Height	25-75mm
Engine Speed	2800rpm	Height Adjustmen	7-level central adjustment
Engine Displacement	173cc	Noise Leve	98dB (A)
Starting System	Recoil & electric start	Blade	Straight blade
Deck Material	Steel	Wheel (inch	Front 8, rear 10
Walk Type	Self-propelled	Grass Catcher Capacity	60L, half plastic bag
Discharge	Rear, side discharge,	Features	1. Foamed upper handle
	mulching		2. Front handle
			3. Control panel
			4. Washing hole

TDE1011E

Adjustable Handle Height

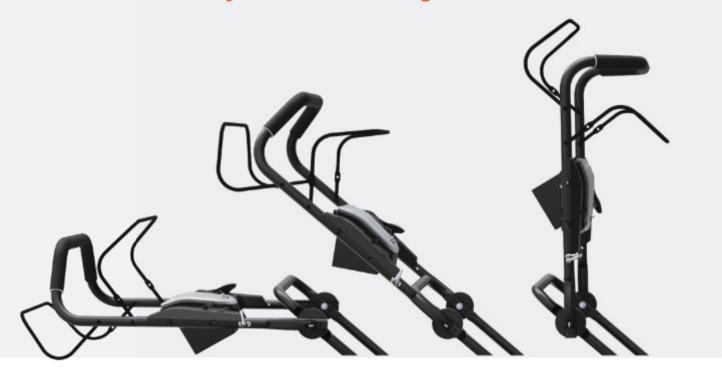


Foldable: Saves up to 50% of Storage Space






PATENTED CROSS-BLADE & FAN SYSTEM

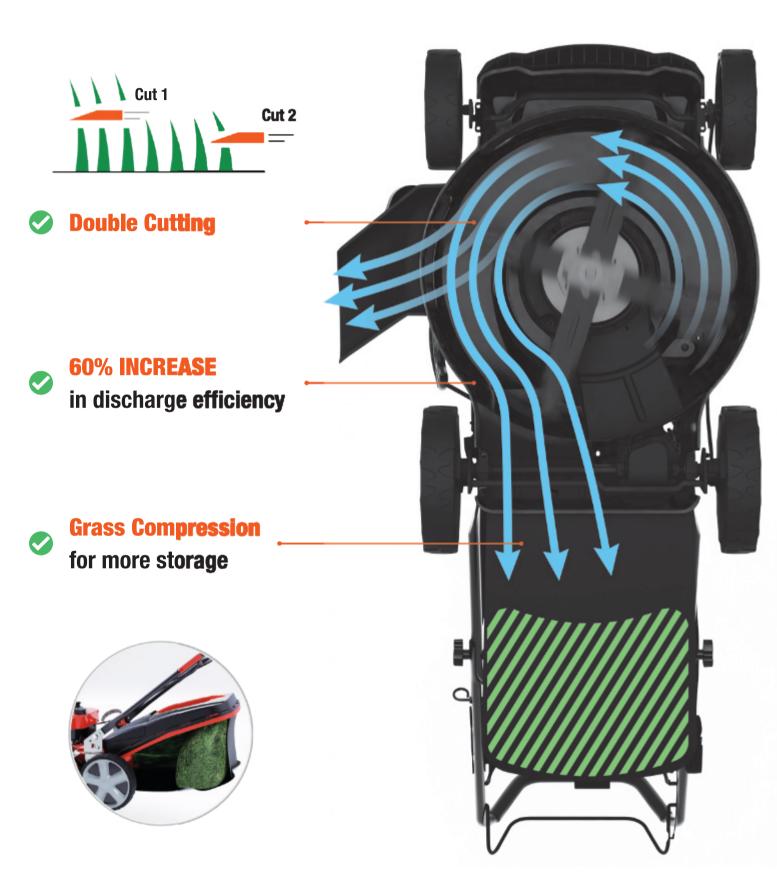


PATENTED CROSS-BLADE & FAN SYSTEM

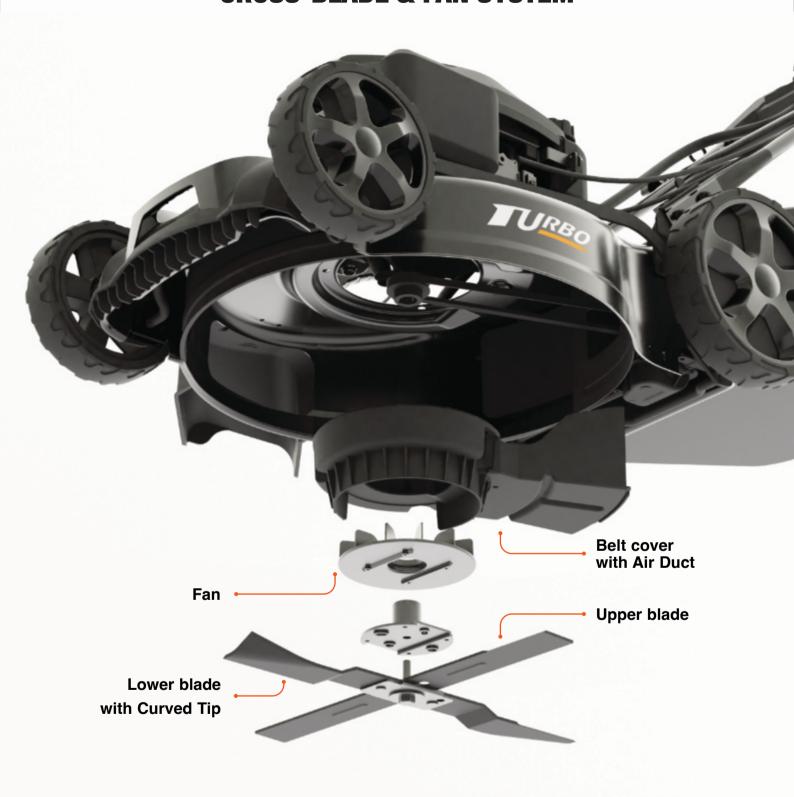



Powerful Turbo Engines

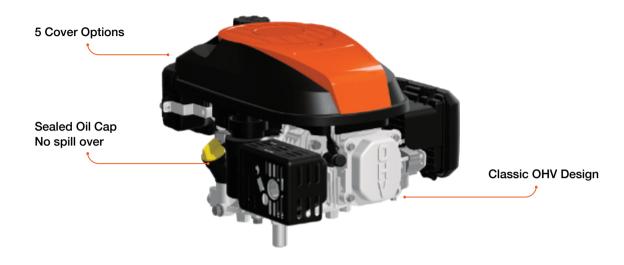








Turbo Engines







TB1P70FA	E-Start Available 173cc
Engine Type	Single cylinder, Air cooled, 4-stroke, OHV
Bore × Stroke (mm)	70×45
Displacement (ML)	173
Max Torque (Nm r/min)	9.5/2600
NET. Power (kW r/min)	3.3/3600
Max. Engine Power (kW/rpm)	3.6/3600
Dimensions (mm)	420×335×365
Starting Mode	Recoil & Electric Start
Net Weight	12.8
Fuel Capacity (L)	1.5
Oil Capacity (L)	0.6



TB1P70F	E-Start Available 196cc
Engine Type	Single cylinder, Air cooled, 4-stroke, OHV
Bore × Stroke (mm)	70×51
Displacement (ML)	196
Max Torque (Nm r/min)	12.0/2500
NET. Power (kW r/min)	3.6/3600
Max. Engine Power (kW/rpm)	4.0/3600
Dimensions (mm)	425×335×365
Starting Mode	Recoil & Electric Start
Net Weight	13
Fuel Capacity (L)	1.5
Oil Capacity (L)	0.6

Optional Covers













Available on all models.



HONDA





LC1P65FE - 123cc



GCV145 - 145cc



450E - 125cc



LC1P65FE-C - 139cc



GCV170 - 170cc



500E - 140cc



LC1P65FE-2 - 166cc

V200 - 196cc



GCV200 - 200cc




550E - 140cc





750EX DOV- 161cc



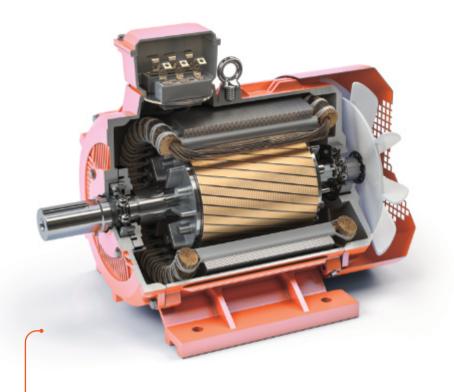



No More Overheat

- Smart motor monitoring
- Auto overload protection
- Longer life & safer use




Premium Carbon Brush

- Durable carbon brushes
- Smooth, efficient motor
- Longer life, less upkeep



Enhanced Belt

- · Strong, durable belt
- · Smooth, consistent power
- · Quieter, longer-lasting mower

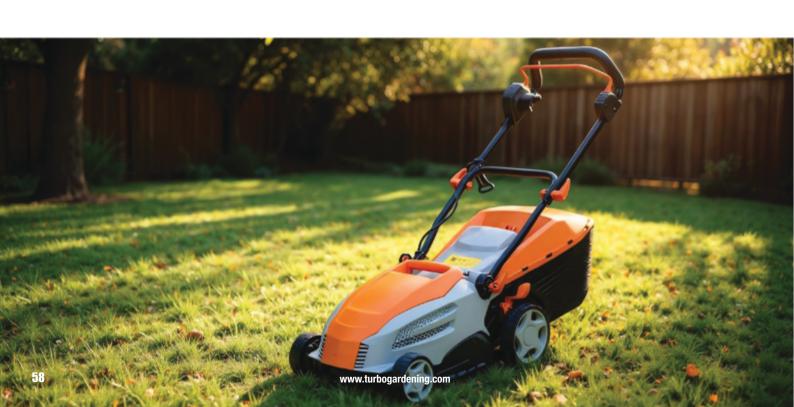



TBE1332 Voltage: Wattage: Speed (no load):

Cutting width: Height adjustment: Advised max. cutting area: Grass collection box capacity: Wheels Diameter:

230V-240V~, 50Hz 1300W 3300r/min 320mm 3 (30-60mm approx.) 400m² approx. 30L (full plastic) Φ125mm/Φ140mm

1300W









TRF1636

IDEIUUU	1600W
Voltage:	230V-240V~, 50Hz
Wattage:	1600W
Speed (no load):	3600r/min
Cutting width:	360mm
Height adjustment:	6 (20-70mm approx.)
Advised max. cutting area:	500m ² approx.
Grass collection box capacity:	40L (full plastic)
Wheels Diameter:	Φ140mm/Φ198mm











TRE10/19

DE 104Z	1800W
Voltage:	230V-240V~, 50Hz
Wattage:	1800W
Speed (no load):	3600r/min
Cutting width:	420mm
Height adjustment:	6 (20-70mm approx.)
Advised max. cutting area:	700m ² approx.
Grass collection box capacity:	40L (full plastic)
Wheels Diameter:	Φ160mm/Φ215mm









595pcs MOQ (40HQ)

Available for development









Voltage: 230~ 50Hz
Wattage: 1800/1900W
Wheel Diameter: Front 17cm, Rear 22cm
Speed: 3800/min
Cutting Width: 440mm
Cutting height: 20~70mm, 6 levels
Grass box Capacity: 45L Plastic Top + Fabric Bag
Advised max. cutting area: 700m² approx.





Robotic Lawn Mower Project



Open for Partnership






OPTIONAL COVERS



22-inch / 560mm Self Propelled Trimmer

Turbo Powered	TURBO KG		arton Dimensions	360pcs MOQ (40HQ)
Engine	OHV,4-stroke, air-cooled	Walk-Type	Self-propelled	
Engine Model	TB1P70FA	Wheels	10"	
Displacement	173cc	Starting System	Recoil	
Deck	Metal Deck	Cutting Width	22"(560mm)	
String Diameter	4.0mm	Cutting Height	30mm~75mm	

All models are customizable.

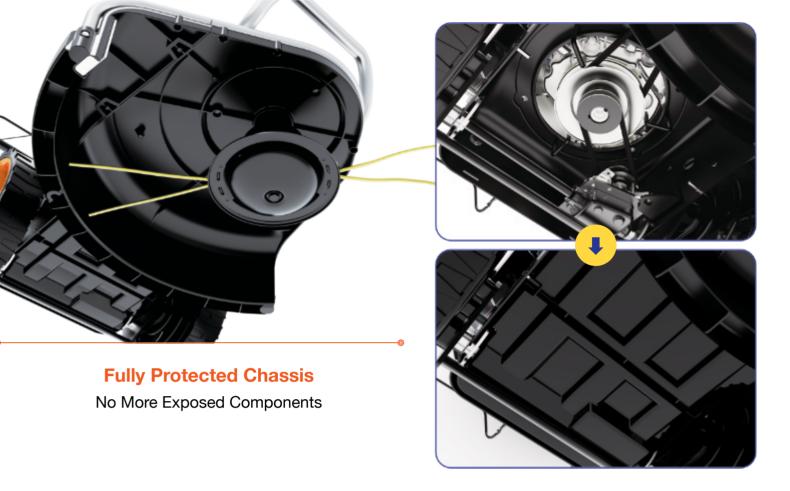

Tougher Build, Easier Trimming

Foldable: Saves up to 50% of Storage Space





OPTIONAL COVERS



All models are customizable.



Compact Packaging 430pcs in 40HQ







TB36T1

om
ensions 430pcs MOQ (40HQ)
nt)
able Blades
nt)





TB60T1

10011		<u></u> 4 39KG ∠	── 66×38×65cm	430pcs
6-Bladed	TURBO	Gross Weight	Carton Dimensions	430pcs MOQ (40HQ)
Engine Model	TB1P65F	Tilling W	idth 600mm	
Engine Power	2.7kW (3.6HP)	Max. Tilling De	epth 270mm	
Engine Speed	3000rpm	No. of Blade Gro	oups 6	
Engine Displacement	139cc	Who	eels 6" (front)	
Starting System	Recoil	Featu	ures Swappable, pr	otected blades







TB60T1B

IDOUTID		40KG	<u> </u>	6×38×65cm	430pcs
6-Bladed	TURBO	Gross Weight		Carton Dimensions	MOQ (40HQ)
Engine Model	TB1P70FA	Tilling \	Width	600mm	
Engine Power	3.6kW (4.8HP)	Max. Tilling [Depth	270mm	
Engine Speed	3000rpm	No. of Blade G	roups	6	
Engine Displacement	173cc	W	/heels	6" (front)	
Starting System	Recoil	Fea	atures	Swappable, prot	ected blades





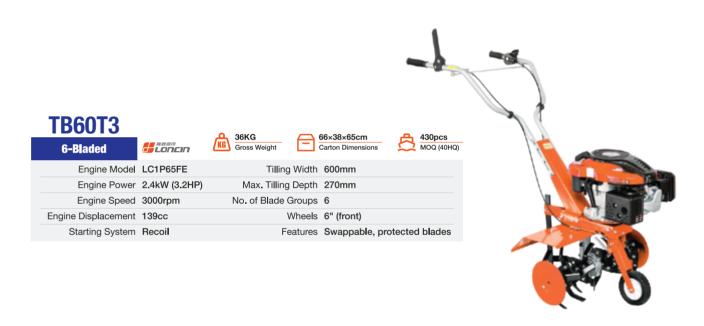

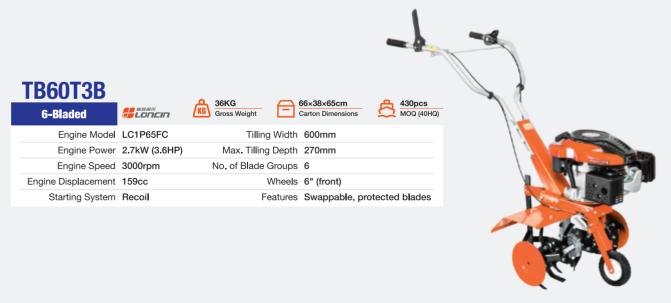









MF17(DFA		212CC	
	Displacemen	it (cc)	212	
	Bore × Stroke	(mm)	70 × 55	
Rated Po	ower Output (kW	/rpm)	4.2 / 3600	
	Max Torque (Nm.	/rpm)	12 / 3000 ±500	
	Fuel Tank Capac	ity (L)	3.6	
	Oil Capac	ity (L)	0.6	
	Starting Sy	stem	Recoil	
	Dimensions	(mm)	425 × 330 × 395	
	Net Weigh	ıt (kg)	14	







B&S 130G32	208CC
Displacement (cc)	208 сс
Bore × Stroke (mm)	70 × 54
Rated Power Output (kW/rpm)	4.9 / 3600
Max Torque (Nm/rpm)	12.9 / 3000 ±500
Fuel Tank Capacity (L)	3.03
Oil Capacity (L)	0.6
Starting System	Recoil
Dimensions (mm)	287 × 366 × 378
Net Weight (kg)	16.1





IRRPIKI		50KG
Turbo Powered	WIRBO	50KG Gross Weight 62×38×69cm Carton Dimensions 399pcs MOQ (40HQ)
Engine Model	LB170F	Tilling Width 360/600/ 800mm customizable
Engine Power	4.8kW (6HP)	Max. Tilling Depth 100-250mm
Engine Speed	3600rpm	No. of Blade Groups 6
Engine Displacement	212cc	Wheels 6" (front)
Starting System	Recoil	Blade Diameter 340mm
Brake System	Belt & Chain	Features Swappable Blades

All models are customizable.



Optional Spare Parts







Double-Sided Plow




Single-Sided Plow




Potato Plough



Resistance Rod



Powerful 212cc Engine



Heavy-Duty Gearbox







Rear-Tine Tiller		72KG	112×53×49cm	220pcs
Turbo Powered	WRBO	Gross Weight	Carton Dimension	ions MOQ (40HQ)
Engine Displacement	212cc		Tilling Depth 20	03 mm
Engine Type	4-Stroke OHV	Ti ll ing D	epth Adjustments 41	mm Increments
Fuel Capacity	3.1 L		Wheel Diameter 33	30 mm
Oil Capacity	500 ml		Length 14	19 cm
Oil Type	10W-30		Width 50) cm
Tine Diameter	350 mm		Height 12	26 cm
Tilling Width	483 mm			

All models are customizable.

Ergonomic Controls for Easy Handling with Secure Locker



Large Front Bumper-Handle with Logo

33cm (13-inch)
Durable Pneumatic Wheels



12pc Heavy Duty Steel Tines







Adjustable
Tiller Depth
with Protector







450mm Scarifier

26KG 74×65×53cm 270pcs TURBO Carton Dimensions MOQ (40HQ) Gross Weight **Turbo Powered** Engine OHV,4-stroke, air-cooled Wheels Front 8, rear 10 Displacement 212cc Starting system Pull start Power 4.0~4.5KW Cutting height adjustment 6 individual position No-load Blade speed 2500 rpm/min Cutting Height -15mm/-10mm/-5mm/0mm/ 6mm/+12mm Deck Metal Cutting width 16" (450mm) Blade Scarififer/Ventilation Walk Type Hand push Grass bag 45L



Steel Wire Brush:

- · Steel Wire Teeth No.: 26
- · Steel Wire Diameter: Φ2.2mm
- · Rotation Diameter: Ф180mm
- · Cutting Width: 400mm



Rotary Blade Brush:

- · Blade Teeth No.: 9
- · Blade Thickness: 2mm
- · Rotation Diameter: Ф180mm
- · Cutting Width: 400mm







TB3500iS

3kW

Engine Type	OHV, Single Cylinder, Forced Air Cooling, 4-Stroke
Ignition Type	T.C.I
Bore×Stroke(mm)	65×45
Displacement(ml)	149
Starting System	Recoil Start/Electric Start
Fuel Gas Type	90# or Higher Standard unleaded Gasoline
Fuel Tank Capacity(L)	8
Oil Volume(L)	0.6
Noise db(A)	≤65
Rated Voltage(V)	230
Rated Frequency(Hz)	50/60
Rated Output(kW)	3
Max. Output(kW)	3.5
Regulation System	Electronic speed adjustment

TB5500iS

5kW

Engine Type	OHV, Single Cylinder, Forced Air Cooling, 4-Stroke
Ignition Type	T.C.I
Bore×Stroke(mm)	72×55
Displacement(ml)	224
Starting System	Recoil Start/Electric Start
Fuel Gas Type	90# or Higher Standard unleaded Gasoline
Fuel Tank Capacity(L)	11
Oil Volume(L)	0.6
Noise db(A)	≤65
Rated Voltage(V)	230
Rated Frequency(Hz)	50/60
Rated Output(kW)	5
Max. Output(kW)	5.5
Regulation System	Electronic speed adjustment

PARTS





Front Handles





Control Panels





E-Start Panel


Quick Locks






Mower Blades · All Sizes Available


✓ Megnisium Steel✓ Long-Lasting Sharpness✓ Impact Resistant✓ Precision Cutting Edge

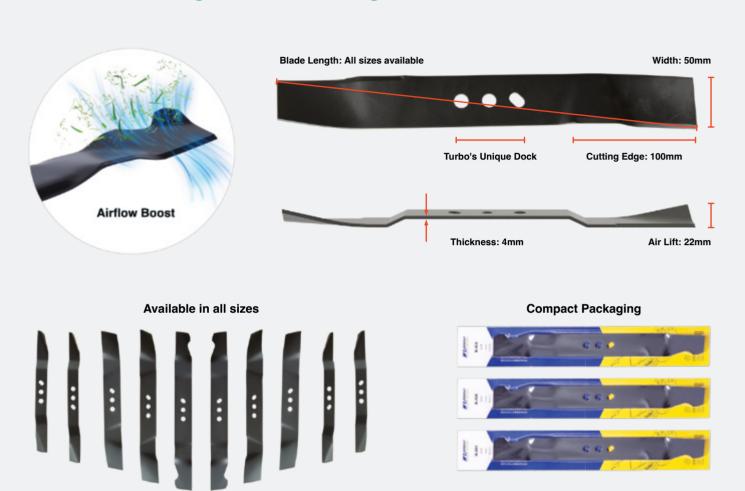

Optional: Swivel Blade Set

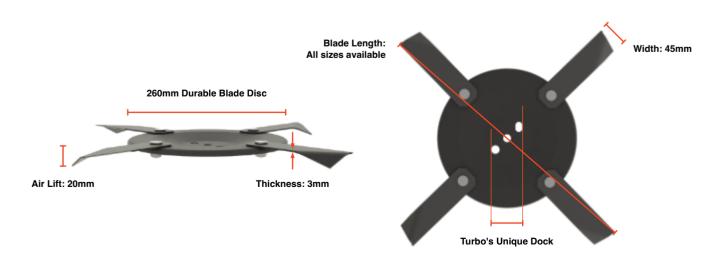

Wheels & Rims

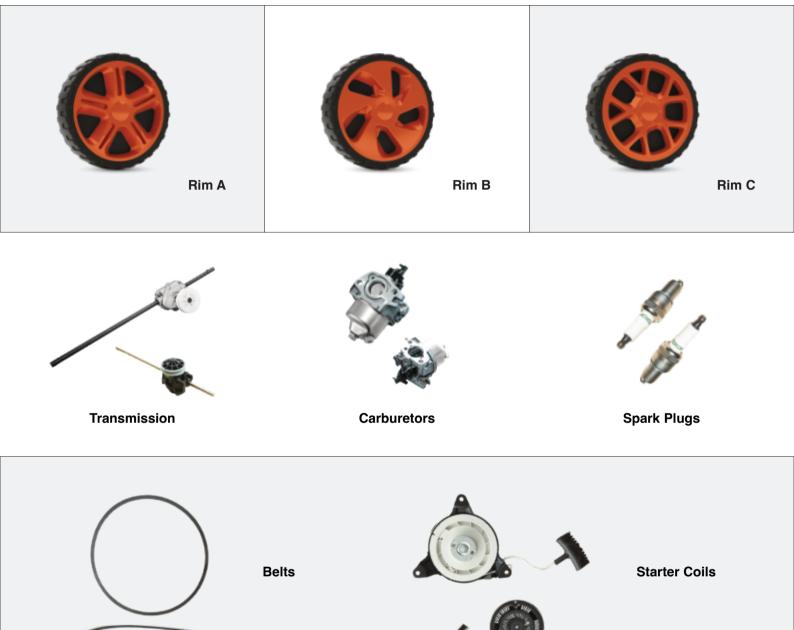











Battery Chargers

PROTECTIVE GEARS



Protective Goggles



Hearing Protection



Protective Gloves













Zhejiang I 浙江

ZHEJIANG TURBO GARDENING MACHINERY CO., LTD.

- dan.li@turbogardening.com
- * www.turbogardening.com
- #138 East Jianghuan Rd., The East Industrial Park, Shangyu, Zhejiang, China, 312300
- +86 187 2109 6950

SCAN FOR WECHAT



www.turbogardening.com