



CARGO TYPE: BOX		WHEELBASE: SWB		BATTERY PACK: 17.66 kWh		DRIVER SEAT: RHD	
General Information				Driving Range ¹			
Classification		L7e-CU		Driving Range (WMTC)		210 km	
Body Structure		Load-bearing		Real-world Driving Range		168+ km	
Dimensions (L × W × H)		3250 x 1230 x 1890 mm		Energy Consumption		≈ 105 Wh/km	
Width with mirror opened		1460 mm		Energy Efficiency		≈ 9.5 km/Wh	
Wheelbase		2140 mm					
Seats / Doors		2 / 2		Tires & Suspensions			
Ramp Angles (Front/Rear)		90° / 22°		Brake (Front / Rear)		Disc / Drum	
Track Width (Front/Rear)		960 / 1060 mm		Wheels		Steel	
Overhang (Front/Rear)		257 / 682 mm		Tire Size (Front / Rear)		145/70R12 (250 kPa)	
Gradeability		15% (8.53°)		Front Suspension		McPherson	
Min. Turning Radius		5000 mm		Rear Suspension		Leaf Spring	
Min. Ground Clearance		140 mm					
GVW		930 kg		Lighting			
Curb Weight		652 kg (645 kg if one seater)		Front Combination Light		Halogen	
				Daytime Running Light		Halogen	
Electric Motor				Turn Signal Lights		Halogen	
Motor Type / Drive Mode		PMSM / RWD		Combination Tail light		LED	
Transmission		Fixed ratio		Rear fog & Reversing light		LED	
Top Speed		70 km/h		Interior Cabin Light		LED	
Max Power (Contd. Rated)		15 kW (7.5 kW)					
Max Torque (Contd. Rated)		85 N.m (42.5 N.m)		Standard Accessories			
Battery Pack ³				CBS Combined Braking System		Power Windows	
Battery Type		LiFePO4 (Air-cooled)		Intermittent Windshield Wiper		Analogue Instrument Cluster	
Battery Pack Capacity		17.66 kWh		Imitation Leather Seat Covers		Heating	
Battery Pack Nominal Voltage		76.8V		2-way Manual Seats		Rearview Mirrors ^(manual)	
Battery Pack Rated Capacity		230Ah		1 × USB Port		7" LCD Infotainment Display	
Battery Pack Weight		147 kg		Reversing Warning Alarm		Bluetooth connectivity	
				2 × Cup Holders		OBD Connection	
Cargo Platform ²				Central Door Lock		Rear-view Camera	
Box Volume		2 m³		Key FOB / Keyless Entry		Key-in Ignition	
Cargo Outside (L × W × H)		1510 × 1194 × 1277 mm		3-point Safety Belt ^(retractable)		EU Type2 Charging Plug	
Cargo Inside (L × W × H)		1397 × 1158 × 1207 mm		4 × Loudspeaker		Portable Charger (220V)	
Cargo Payload		278 kg (285 kg if one seater)		Adjustable Air Vents		Warning Triangle & Safety Vest	
Load Height		710 mm					
Charging ⁴				Drive Mode Dialer (R N D)			
				Warranty			
Charging Mode		AC charging		Battery Pack Warranty		4 years or 200k km ^(whichever comes first)	
On-board Charger (OBC)		3.3 kW		Vehicle Warranty		3 years or 40k km ^(whichever comes first)	
Charging Time (20-80%)		≈ 4.0 h		Options			
Charging Time (0-100%)		≈ 6.7 h		6.6 kW On-board Charger (OBC)		Air Condition	
Charging Distance in 1 hour (est.)		≈ 47 km		Alloy Wheel		Roof Rack Platform	
				Rooftop Solar Panel			



CARGO TYPE: BOX	WHEELBASE: SWB	BATTERY PACK: 17.66 kWh	DRIVER SEAT: RHD
Dimensions			

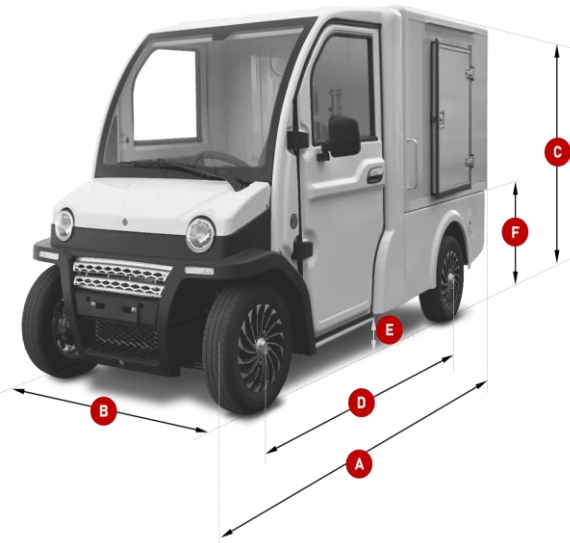

A	Length	3250 mm
B	Width	1230 mm
	Width (incl. Mirror)	1460 mm
C	Height	1890 mm
D	Wheelbase	2140 mm
E	Ground Clearance	140 mm
F	Cargo Bed Height	710 mm

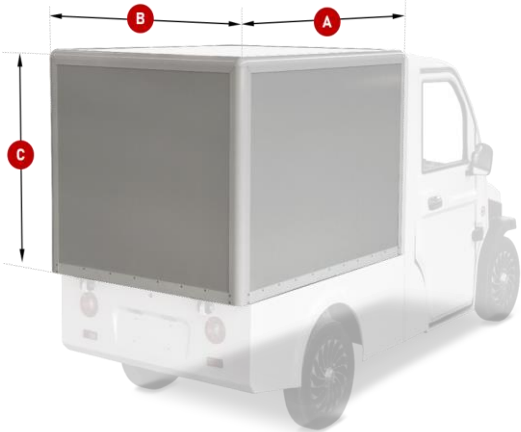

OUTSIDE MEASUREMENT		
A	Length	1510 mm
B	Width	1194 mm
C	Height	1277 mm

INSIDE MEASUREMENT		
A	Length	1397 mm
B	Width	1158 mm
C	Height	1207 mm



Cargo volume

2.0 m³

Optional Cargo Versions

Cargo Box	Cargo Box	Cargo Box	Pickup	Flatbed
Rear door	Side door *	Solar roof *	Alloy bucket *	Chassis Cabin

Products with (*) are available on a build-to-order basis and are offered upon request only.